



# **2.66 inch E-paper Display Series**

## **GDEY0266T90H**

Dalian Good Display Co., Ltd.

# Product Specifications

<b>Customer</b>	<b>Standard</b>
<b>Description</b>	<b>2.66" E-PAPER DISPLAY</b>
<b>Model Name</b>	<b>GDEY0266T90H</b>
<b>Date</b>	<b>2023/09/11</b>
<b>Revision</b>	<b>1.0</b>

	Design Engineering		
	Approval	Check	Design
			

No.18, Zhonghua West ST, Ganjingzi DST, Dalian, CHINA

Tel: +86-411-84619565

Email: info@good-display.com

Website: www.good-display.com

# CONTENTS

1. Over View-----	4
2. Features-----	4
3. Mechanical Specifications-----	4
4. Mechanical Drawing of EPD module-----	5
5. Input /Output Pin Assignment-----	6
6. Electrical Characteristics-----	7
6.1 Absolute Maximum Rating -----	7
6.2 Panel DC Characteristics -----	8
6.3 Panel AC Characteristics-----	9
6.3.1 MCU Interface Selection -----	9
6.3.2 MCU Serial Interface(4-wire SPI) -----	9
6.3.3 MCU Serial Interface(3-wire SPI) -----	11
6.3.4 Interface Timing-----	12
7. Command Table -----	13
8. Optical Specifications -----	25
9. Typical Application Circuit -----	25
10. Reliability test-----	26
11. Matched demo kit-----	27
12. Typical Operating Sequence -----	28
12.1 Normal Operation Flow -----	28
13. Inspection method and condition -----	29
13.1 Inspection condition -----	29
13.2 Display area -----	29
13.3 General inspection standards for product-----	30
14. Packaging -----	33
15. Handling, Safety and Environment Requirements -----	34
16. Precautions-----	35

## 1. Over View

GDEY0266T90H is an Active Matrix Electrophoretic Display (AM EPD), with interface and a reference system design. The display is capable to display images at 1-bit white, black full display capabilities. The 2.66 inch active area contains 184×360 pixels. The module is a TFT-array driving electrophoresis display, with integrated circuits including gate driver, source driver, MCU interface, timing controller, oscillator, DC-DC, SRAM, LUT, VCOM. Module can be used in portable electronic devices, such as Electronic Shelf Label (ESL) System.

## 2. Features

- 184×360 pixels display
- High contrast High reflectance
- Ultra wide viewing angle Ultra low power consumption
- Pure reflective mode
- Bi-stable display
- Commercial temperature range
- Landscape portrait modes
- Hard-coat antiglare display surface
- Ultra Low current deep sleep mode
- On chip display RAM
- Waveform can stored in On-chip OTP or written by MCU
- Serial peripheral interface available
- On-chip oscillator
- On-chip booster and regulator control for generating VCOM, Gate and Source driving voltage
- I<sup>2</sup>C signal master interface to read external temperature sensor
- Support partial update mode
- Built-in temperature sensor

## 3. Mechanical Specifications

Parameter	Specifications	Unit	Remark
Screen Size	2.66	Inch	
Display Resolution	184(H)×360(V)	Pixel	Dpi:152
Active Area	30.69×60.05	mm	
Pixel Pitch	0.1668×0.1668	mm	
Pixel Configuration	Rectangle		
Outline Dimension	37.11(H)×72.59(V) ×1.0(D)	mm	
Weight	5.05 ± 0.5	g	

### 4. Mechanical Drawing of EPD module

<i>CUSTOMER'S APPROVED:</i>	<i>DATE:</i>	<i>PAGE:</i>
-----------------------------	--------------	--------------

NO.	DESCRIPTION	NAME	DATE	
③				
②				
①	Initial version	WJZ	2023.06.01	

**184\*360**

CONTACT SIDE

STIFFENER

PIN NO.	Symbol
1	NC
2	GDR
3	RESE
4	NC
5	VSH2
6	TSCL
7	TSDA
8	BS1
9	BUSY
10	RES#
11	D/C#
12	CS#
13	SCL
14	SDA
15	VDDIO
16	VCI
17	VSS
18	VDD
19	VPP
20	VSH1
21	VGH
22	VSL
23	VGL
24	VCOM

<p>1 Display mode</p> <p>2 Resolution</p> <p>3 Operating Voltage:</p> <p>4 Operating Temp:</p> <p>5 Storage Temp:</p> <p>6 Unspecified tolerance:</p> <p>7 LCD controller driver:</p> <p>8 Customer No.:</p> <p>9 Dimensions with mark "*" are important</p> <p>10 RoHS compliant</p>	<p>EPD_B/W</p> <p>2.66", 184*360</p> <p>VCI=3.0V</p> <p>0°C-50°C</p> <p>-25°C~70°C</p> <p>±0.2</p> <p>SSD1685</p>
---	---

Dalian Good Display Co., Ltd.

GDEY0266T90H

Ver.1

Unit:mm

Drw

Chk

Apr

## 5. Input /Output Pin Assignment

No.	Name	I/O	Description	Remark
1	NC		Do not connect with other NC pins	Keep Open
2	GDR	O	N-Channel MOSFET Gate Drive Control	
3	RESE	I	Current Sense Input for the Control Loop	
4	NC	NC	Do not connect with other NC pins	Keep Open
5	VSH2	C	Positive Source driving voltage(Red)	
6	TSCL	O	This pin is I <sup>2</sup> C Interface to digital temperature sensor Clock pin. External pull up resistor is required when connecting to I <sup>2</sup> C slave. When not in use: VSS	
7	TSDA	I/O	This pin is I <sup>2</sup> C Interface to digital temperature sensor Data pin. External pull up resistor is required when connecting to I <sup>2</sup> C slave. When not in use: VSS	
8	BS1	I	Bus Interface selection pin	Note 5-5
9	BUSY	O	Busy state output pin	Note 5-4
10	RES#	I	Reset signal input. Active Low.	Note 5-3
11	D/C#	I	Data /Command control pin	Note 5-2
12	CS#	I	Chip select input pin	Note 5-1
13	SCL	I	Serial Clock pin (SPI)	
14	SDA	I/O	Serial Data pin (SPI)	
15	VDDIO	P	Power Supply for interface logic pins It should be connected with VCI	
16	VCI	P	Power Supply for the chip	
17	VSS	P	Ground	
18	VDD	C	Core logic power pin VDD can be regulated internally from VCI. A capacitor should be connected between VDD and VSS	
19	VPP	P	FOR TEST	
20	VSH1	C	Positive Source driving voltage	
21	VGH	C	Power Supply pin for Positive Gate driving voltage and VSH1	
22	VSL	C	Negative Source driving voltage	

23	VGL	C	Power Supply pin for Negative Gate driving voltage VCOM and VSL	
24	VCOM	C	VCOM driving voltage	

I = Input Pin, O =Output Pin, I/O = Bi-directional Pin (Input/output), P = Power Pin, C =Capacitor Pin

Note 5-1: This pin (CS#) is the chip select input connecting to the MCU. The chip is enabled for MCU communication only when CS# is pulled LOW.

Note 5-2: This pin is (D/C#) Data/Command control pin connecting to the MCU in 4-wire SPI mode. When the pin is pulled HIGH, the data at SDA will be interpreted as data. When the pin is pulled LOW, the data at SDA will be interpreted as command.

Note 5-3: This pin (RES#) is reset signal input. The Reset is active low.

Note 5-4: This pin is Busy state output pin. When Busy is High, the operation of chip should not be interrupted, command should not be sent. The chip would put Busy pin High when -Outputting display waveform -Communicating with digital temperature sensor

Note 5-5: Bus interface selection pin

BS1 State	MCU Interface
L	4-lines serial peripheral interface(SPI) - 8 bits SPI
H	3- lines serial peripheral interface(SPI) - 9 bits SPI

## 6. Electrical Characteristics

### 6.1 Absolute Maximum Rating

Parameter	Symbol	Rating	Unit
Logic supply voltage	VCI	-0.5 to +6.0	V
Logic Input voltage	VIN	-0.5 to VCI +0.5	V
Logic Output voltage	VOUT	-0.5 to VCI +0.5	V
Operating Temp range	TOPR	0 to +50	°C
Storage Temp range	TSTG	-25 to +70	°C
Optimal Storage Temp	TSTGo	23±2	°C
Optimal Storage Humidity	HSTGo	55±10	%RH


Note: Maximum ratings are those values beyond which damages to the device may occur. Functional operation should be restricted to the limits in the Panel DC Characteristics tables.

## 6.2 Panel DC Characteristics

The following specifications apply for:  $V_{SS}=0V$ ,  $V_{CI}=3.0V$ ,  $TOPR = 25^{\circ}C$

Parameter	Symbol	Conditions	Applicable pin	Min.	Typ.	Max	Units
Single ground	$V_{SS}$	-		-	0	-	V
Logic supply voltage	$V_{CI}$	-	$V_{CI}$	2.2	3.0	3.7	V
Core logic voltage	$V_{DD}$		$V_{DD}$	1.7	1.8	1.9	V
High level input voltage	$V_{IH}$	-	-	$0.8 V_{CI}$	-	-	V
Low level input voltage	$V_{IL}$	-	-	-	-	$0.2 V_{CI}$	V
High level output voltage	$V_{OH}$	$I_{OH} = -100\mu A$	-	$0.9 V_{CI}$	-	-	V
Low level output voltage	$V_{OL}$	$I_{OL} = 100\mu A$	-	-	-	$0.1 V_{CI}$	V
Typical power	$P_{TYP}$	$V_{CI} = 3.0V$	-	-	9	-	mW
Deep sleep mode	$P_{STPY}$	$V_{CI} = 3.0V$	-	-	0.006	-	mW
Typical operating current	$I_{opr\_V_{CI}}$	$V_{CI} = 3.0V$	-	-	3	-	mA
Full update time	-	$25^{\circ}C$	-	-	3	-	sec
Fast update time	-	$25^{\circ}C$	-	-	1.5	-	sec
Partial update time	-	$25^{\circ}C$	-	-	0.3	-	sec
Sleep mode current	$I_{slp\_V_{CI}}$	DC/DC off No clock No input load Ram data retain	-	-	20	-	$\mu A$
Deep sleep mode current	$I_{dslp\_V_{CI}}$	DC/DC off No clock No input load Ram data not retain	-	-	2	-	$\mu A$

Notes: 1. The typical power is measured with following transition from horizontal 2 scale pattern to vertical 2 scale pattern.

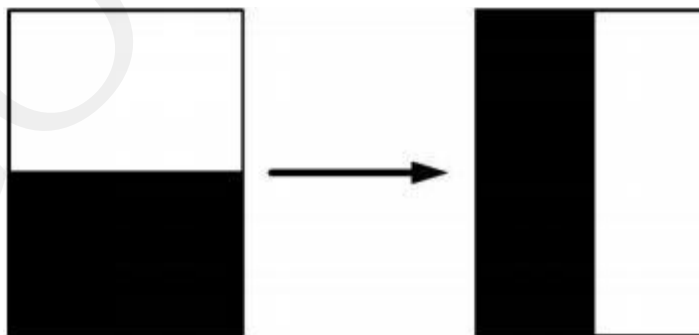

2. The deep sleep power is the consumed power when the panel controller is in deep sleep mode.
3. The listed electrical/optical characteristics are only guaranteed under the controller & waveform provided by Good Display.



## 6.3 AC Characteristics

### 6.3.1 MCU Interface Selection

The pin assignment at different interface mode is summarized in Table 6-4-1. Different MCU mode can be set by hardware selection on BS1 pins. The display panel only supports 4-wire SPI or 3-wire SPI interface mode.

Pin Name	Data/Command Interface		Control Signal		
	SDA	SCL	CS#	D/C#	RES#
Bus interface	SDA	SCL	CS#	D/C#	RES#
BS1=L 4-wire SPI	SDA	SCL	CS#	D/C#	RES#
BS1=H 3-wire SPI	SDA	SCL	CS#	L	RES#

### 6.3.2 MCU Serial Interface (4-wire SPI)


The serial interface consists of serial clock SCL, serial data SDA, D/C#, CS#. This interface supports Write mode and Read mode.

Function	CS#	D/C#	SCL
Write command	L	L	↑
Write data	L	H	↑

Note: ↑ stands for rising edge of signal

In the write mode SDA is shifted into an 8-bit shift register on every rising edge of SCL in the order of D7, D6, ... D0. The level of D/C# should be kept over the whole byte. The data byte in the shift register is written to the Graphic Display Data RAM /Data Byte register or command Byte register according to D/C# pin.


Figure 6-1: Write procedure in 4-wire SPI mode

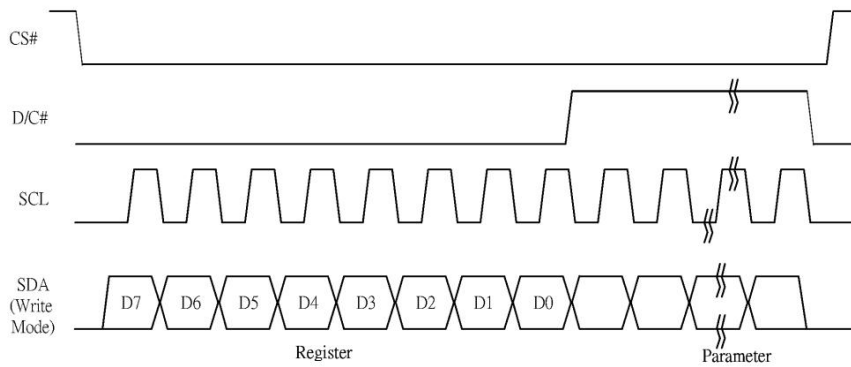

In the Read mode:

1. After driving CS# to low, MCU need to define the register to be read.
2. SDA is shifted into an 8-bit shift register on every rising edge of SCL in the order of D7, D6, ... D0 with D/C# keep low.
3. After SCL change to low for the last bit of register, D/C# need to drive to high.
4. SDA is shifted out an 8-bit data on every falling edge of SCL in the order of D7, D6, ... D0.
5. Depending on register type, more than 1 byte can be read out. After all byte are read, CS# need to drive to high to stop the read operation.

Figure 6-2: Read procedure in 4-wire SPI mode

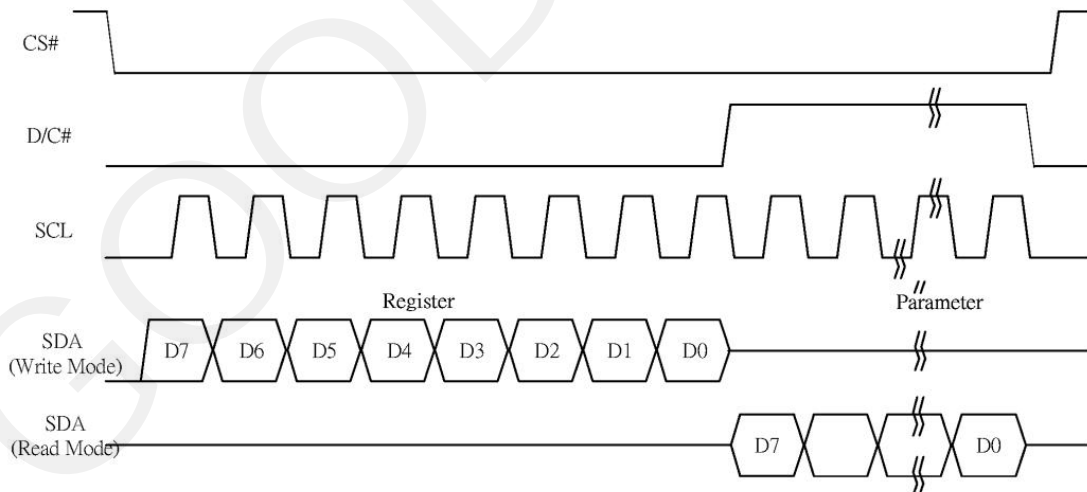

### 6.3.3 MCU Serial Interface (3-wire SPI)


The 3-wire serial interface consists of serial clock SCL, serial data SDA and CS#. This interface also supports Write mode and Read mode.

The operation is similar to 4-wire serial interface while D/C# pin is not used. There are altogether 9-bits will be shifted into the shift register on every ninth clock in sequence: D/C# bit, D7 to D0 bit. The D/C# bit (first bit of the sequential data) will determine the following data byte in the shift register is written to the Display Data RAM (D/C# bit = 1) or the command register (D/C# bit = 0).

Function	CS#	D/C#	SCL
Write command	L	Tie	↑
Write data	L	Tie	↑

Note: ↑ stands for rising edge of signal


Figure 6-3: Write procedure in 3-wire SPI mode

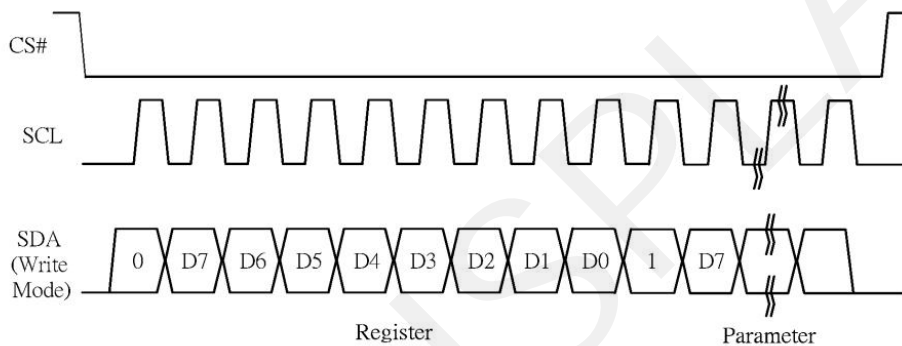

In the Read mode:


1. After driving CS# to low, MCU need to define the register to be read.
2. D/C=0 is shifted thru SDA with one rising edge of SCL
3. SDA is shifted into an 8-bit shift register on every rising edge of SCL in the order of D7, D6, ... D0.
4. D/C=1 is shifted thru SDA with one rising edge of SCL
5. SDA is shifted out an 8-bit data on every falling edge of SCL in the order of D7, D6, ... D0.
6. Depending on register type, more than 1 byte can be read out. After all byte are read, CS# need to drive to high to stop the read operation.

Figure 6-4: Read procedure in 3-wire SPI mode

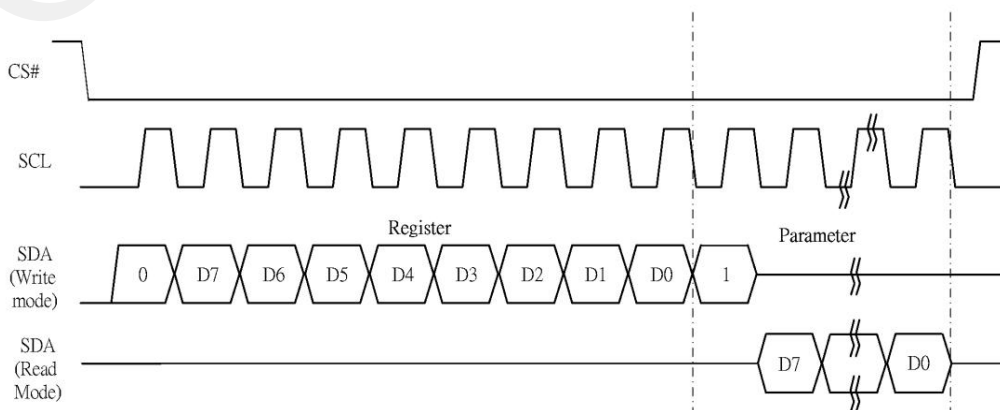

### 6.3.4 Interface Timing

The following specifications apply for: VSS=0V, VCI=3.0V, TOPR =25°C.

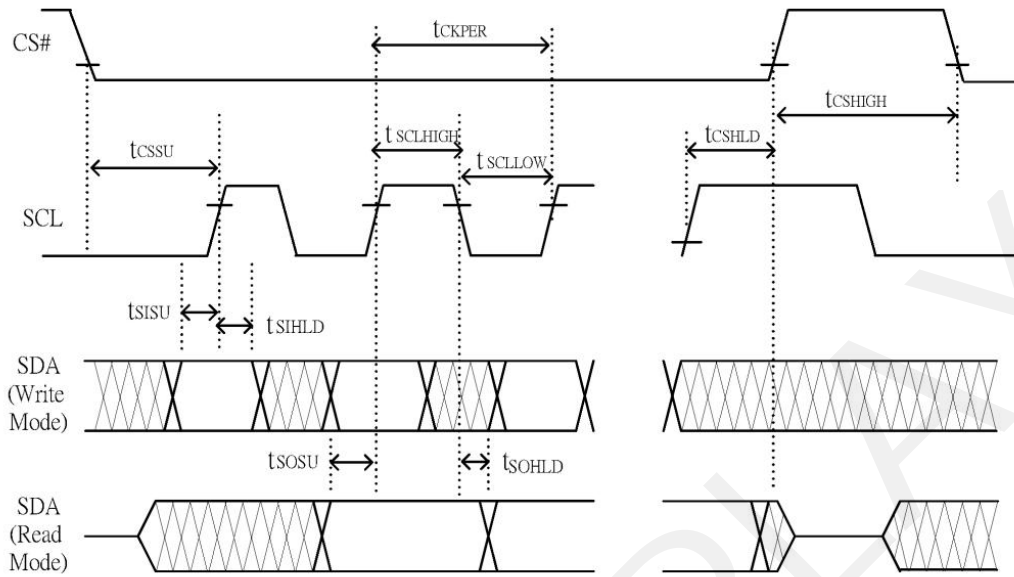

Changed Diagram

#### Write mode

Symbol	Parameter	Min	Typ	Max	Unit
f <sub>SCL</sub>	SCL frequency (Write Mode)	-	-	20	MHz
t <sub>CSSU</sub>	Time CS# has to be low before the first rising edge of SCLK	TBD	-	-	ns
t <sub>CSHLD</sub>	Time CS# has to remain low after the last falling edge of SCLK	TBD	-	-	ns
t <sub>CSHIGH</sub>	Time CS# has to remain high between two transfers	TBD	-	-	ns
t <sub>SCLHIGH</sub>	Part of the clock period where SCL has to remain high	TBD	-	-	ns
t <sub>SCLLOW</sub>	Part of the clock period where SCL has to remain low	TBD	-	-	ns
t <sub>SISU</sub>	Time SI (SDA Write Mode) has to be stable before the next rising edge of SCL	TBD	-	-	ns
t <sub>SIHLD</sub>	Time SI (SDA Write Mode) has to remain stable after the rising edge of SCL	TBD	-	-	ns

#### Read mode

Symbol	Parameter	Min	Typ	Max	Unit
f <sub>SCL</sub>	SCL frequency (Read Mode)	-	-	2.5	MHz
t <sub>CSSU</sub>	Time CS# has to be low before the first rising edge of SCLK	TBD	-	-	ns
t <sub>CSHLD</sub>	Time CS# has to remain low after the last falling edge of SCLK	TBD	-	-	ns
t <sub>CSHIGH</sub>	Time CS# has to remain high between two transfers	TBD	-	-	ns
t <sub>SCLHIGH</sub>	Part of the clock period where SCL has to remain high	TBD	-	-	ns
t <sub>SCLLOW</sub>	Part of the clock period where SCL has to remain low	TBD	-	-	ns
t <sub>SOSU</sub>	Time SO(SDA Read Mode) will be stable before the next rising edge of SCL	TBD	TBD	-	ns
t <sub>SOHLD</sub>	Time SO (SDA Read Mode) will remain stable after the falling edge of SCL	TBD	TBD	-	ns

## 7. Command Table

Command Table																																																																				
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description																																																								
0	0	01	0	0	0	0	0	0	0	1	Driver Output control	Gate setting A[8:0]= 17Fh [POR], 384 MUX MUX Gate lines setting as (A[8:0] + 1).  B [2:0] = 000 [POR]. Gate scanning sequence and direction  B[2]: GD Selects the 1st output Gate GD=0 [POR], G0 is the 1st gate output channel, gate output sequence is G0, G1, G2, G3, ... GD=1, G1 is the 1st gate output channel, gate output sequence is G1, G0, G3, G2, ...  B[1]: SM Change scanning order of gate driver. SM=0 [POR], G0, G1, G2, G3...G382, G383 (left and right gate interlaced) SM=1, G0, G2, G4 ...G382, G1, G3, ...G383  B[0]: TB TB = 0 [POR], scan from G0 to G383 TB = 1, scan from G383 to G0.																																																								
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																										
0	1		0	0	0	0	0	0	0	A <sub>8</sub>																																																										
0	1		0	0	0	0	0	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>																																																										
0	0	03	0	0	0	0	0	0	1	1	Gate Driving voltage Control	Set Gate driving voltage A[4:0] = 00h [POR] VGH setting from 10V to 20V																																																								
0	1		0	0	0	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																										
												<table border="1"> <thead> <tr> <th>A[4:0]</th> <th>VGH</th> <th>A[4:0]</th> <th>VGH</th> </tr> </thead> <tbody> <tr> <td>00h</td> <td>20</td> <td>0Dh</td> <td>15</td> </tr> <tr> <td>03h</td> <td>10</td> <td>0Eh</td> <td>15.5</td> </tr> <tr> <td>04h</td> <td>10.5</td> <td>0Fh</td> <td>16</td> </tr> <tr> <td>05h</td> <td>11</td> <td>10h</td> <td>16.5</td> </tr> <tr> <td>06h</td> <td>11.5</td> <td>11h</td> <td>17</td> </tr> <tr> <td>07h</td> <td>12</td> <td>12h</td> <td>17.5</td> </tr> <tr> <td>08h</td> <td>12.5</td> <td>13h</td> <td>18</td> </tr> <tr> <td>07h</td> <td>12</td> <td>14h</td> <td>18.5</td> </tr> <tr> <td>08h</td> <td>12.5</td> <td>15h</td> <td>19</td> </tr> <tr> <td>09h</td> <td>13</td> <td>16h</td> <td>19.5</td> </tr> <tr> <td>0Ah</td> <td>13.5</td> <td>17h</td> <td>20</td> </tr> <tr> <td>0Bh</td> <td>14</td> <td>Other</td> <td>NA</td> </tr> <tr> <td>0Ch</td> <td>14.5</td> <td></td> <td></td> </tr> </tbody> </table>	A[4:0]	VGH	A[4:0]	VGH	00h	20	0Dh	15	03h	10	0Eh	15.5	04h	10.5	0Fh	16	05h	11	10h	16.5	06h	11.5	11h	17	07h	12	12h	17.5	08h	12.5	13h	18	07h	12	14h	18.5	08h	12.5	15h	19	09h	13	16h	19.5	0Ah	13.5	17h	20	0Bh	14	Other	NA	0Ch	14.5		
A[4:0]	VGH	A[4:0]	VGH																																																																	
00h	20	0Dh	15																																																																	
03h	10	0Eh	15.5																																																																	
04h	10.5	0Fh	16																																																																	
05h	11	10h	16.5																																																																	
06h	11.5	11h	17																																																																	
07h	12	12h	17.5																																																																	
08h	12.5	13h	18																																																																	
07h	12	14h	18.5																																																																	
08h	12.5	15h	19																																																																	
09h	13	16h	19.5																																																																	
0Ah	13.5	17h	20																																																																	
0Bh	14	Other	NA																																																																	
0Ch	14.5																																																																			

Command Table																																																																																																																																																																																																																																																																																															
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0	Command	Description																																																																																																																																																																																																																																																																																			
0	0	04	0	0	0	0	0	1	0	0	Source Driving voltage Control	Set Source driving voltage A[7:0] = 41h [POR], VSH1 at 15V B [7:0] = A8h [POR], VSH2 at 5V. C[7:0] = 32h [POR], VSL at -15V Remark: VSH1>=VSH2																																																																																																																																																																																																																																																																																			
0	1		A7	A6	A5	A4	A3	A2	A1	A0																																																																																																																																																																																																																																																																																					
0	1		B7	B6	B5	B4	B3	B2	B1	B0																																																																																																																																																																																																																																																																																					
0	1		C7	C6	C5	C4	C3	C2	C1	C0																																																																																																																																																																																																																																																																																					
B[7] = 1, VSH2 voltage setting from 2.4V to 8.6V							A[7]/B[7] = 0, VSH1/VSH2 voltage setting from 8.8V to 17V				C[7] = 0, VSL setting from -5V to -17V																																																																																																																																																																																																																																																																																				
<table border="1"> <thead> <tr> <th>A/B[7:0]</th> <th>VSH1/VSH2</th> <th>A/B[7:0]</th> <th>VSH1/VSH2</th> </tr> </thead> <tbody> <tr><td>8Eh</td><td>2.4</td><td>AEh</td><td>5.6</td></tr> <tr><td>8Fh</td><td>2.5</td><td>AFh</td><td>5.7</td></tr> <tr><td>90h</td><td>2.6</td><td>B0h</td><td>5.8</td></tr> <tr><td>91h</td><td>2.7</td><td>B1h</td><td>5.9</td></tr> <tr><td>92h</td><td>2.8</td><td>B2h</td><td>6</td></tr> <tr><td>93h</td><td>2.9</td><td>B3h</td><td>6.1</td></tr> <tr><td>94h</td><td>3</td><td>B4h</td><td>6.2</td></tr> <tr><td>95h</td><td>3.1</td><td>B5h</td><td>6.3</td></tr> <tr><td>96h</td><td>3.2</td><td>B6h</td><td>6.4</td></tr> <tr><td>97h</td><td>3.3</td><td>B7h</td><td>6.5</td></tr> <tr><td>98h</td><td>3.4</td><td>B8h</td><td>6.6</td></tr> <tr><td>99h</td><td>3.5</td><td>B9h</td><td>6.7</td></tr> <tr><td>9Ah</td><td>3.6</td><td>BAh</td><td>6.8</td></tr> <tr><td>9Bh</td><td>3.7</td><td>BBh</td><td>6.9</td></tr> <tr><td>9Ch</td><td>3.8</td><td>BCh</td><td>7</td></tr> <tr><td>9Dh</td><td>3.9</td><td>BDh</td><td>7.1</td></tr> <tr><td>9Eh</td><td>4</td><td>BEh</td><td>7.2</td></tr> <tr><td>9Fh</td><td>4.1</td><td>BFh</td><td>7.3</td></tr> <tr><td>A0h</td><td>4.2</td><td>C0h</td><td>7.4</td></tr> <tr><td>A1h</td><td>4.3</td><td>C1h</td><td>7.5</td></tr> <tr><td>A2h</td><td>4.4</td><td>C2h</td><td>7.6</td></tr> <tr><td>A3h</td><td>4.5</td><td>C3h</td><td>7.7</td></tr> <tr><td>A4h</td><td>4.6</td><td>C4h</td><td>7.8</td></tr> <tr><td>A5h</td><td>4.7</td><td>C5h</td><td>7.9</td></tr> <tr><td>A6h</td><td>4.8</td><td>C6h</td><td>8</td></tr> <tr><td>A7h</td><td>4.9</td><td>C7h</td><td>8.1</td></tr> <tr><td>A8h</td><td>5</td><td>C8h</td><td>8.2</td></tr> <tr><td>A9h</td><td>5.1</td><td>C9h</td><td>8.3</td></tr> <tr><td>AAh</td><td>5.2</td><td>CAh</td><td>8.4</td></tr> <tr><td>ABh</td><td>5.3</td><td>CBh</td><td>8.5</td></tr> <tr><td>ACH</td><td>5.4</td><td>CCh</td><td>8.6</td></tr> <tr><td>ADh</td><td>5.5</td><td>Other</td><td>NA</td></tr> </tbody> </table>				A/B[7:0]	VSH1/VSH2	A/B[7:0]	VSH1/VSH2	8Eh	2.4	AEh	5.6	8Fh	2.5	AFh	5.7	90h	2.6	B0h	5.8	91h	2.7	B1h	5.9	92h	2.8	B2h	6	93h	2.9	B3h	6.1	94h	3	B4h	6.2	95h	3.1	B5h	6.3	96h	3.2	B6h	6.4	97h	3.3	B7h	6.5	98h	3.4	B8h	6.6	99h	3.5	B9h	6.7	9Ah	3.6	BAh	6.8	9Bh	3.7	BBh	6.9	9Ch	3.8	BCh	7	9Dh	3.9	BDh	7.1	9Eh	4	BEh	7.2	9Fh	4.1	BFh	7.3	A0h	4.2	C0h	7.4	A1h	4.3	C1h	7.5	A2h	4.4	C2h	7.6	A3h	4.5	C3h	7.7	A4h	4.6	C4h	7.8	A5h	4.7	C5h	7.9	A6h	4.8	C6h	8	A7h	4.9	C7h	8.1	A8h	5	C8h	8.2	A9h	5.1	C9h	8.3	AAh	5.2	CAh	8.4	ABh	5.3	CBh	8.5	ACH	5.4	CCh	8.6	ADh	5.5	Other	NA	<table border="1"> <thead> <tr> <th>A/B[7:0]</th> <th>VSH1/VSH2</th> <th>A/B[7:0]</th> <th>VSH1/VSH2</th> </tr> </thead> <tbody> <tr><td>21h</td><td>8.8</td><td>37h</td><td>13</td></tr> <tr><td>23h</td><td>9</td><td>38h</td><td>13.2</td></tr> <tr><td>24h</td><td>9.2</td><td>39h</td><td>13.4</td></tr> <tr><td>25h</td><td>9.4</td><td>3Ah</td><td>13.6</td></tr> <tr><td>26h</td><td>9.6</td><td>3Bh</td><td>13.8</td></tr> <tr><td>27h</td><td>9.8</td><td>3Ch</td><td>14</td></tr> <tr><td>28h</td><td>10</td><td>3Dh</td><td>14.2</td></tr> <tr><td>29h</td><td>10.2</td><td>3Eh</td><td>14.4</td></tr> <tr><td>2Ah</td><td>10.4</td><td>3Fh</td><td>14.6</td></tr> <tr><td>2Bh</td><td>10.6</td><td>40h</td><td>14.8</td></tr> <tr><td>2Ch</td><td>10.8</td><td>41h</td><td>15</td></tr> <tr><td>2Dh</td><td>11</td><td>42h</td><td>15.2</td></tr> <tr><td>2Eh</td><td>11.2</td><td>43h</td><td>15.4</td></tr> <tr><td>2Fh</td><td>11.4</td><td>44h</td><td>15.6</td></tr> <tr><td>30h</td><td>11.6</td><td>45h</td><td>15.8</td></tr> <tr><td>31h</td><td>11.8</td><td>46h</td><td>16</td></tr> <tr><td>32h</td><td>12</td><td>47h</td><td>16.2</td></tr> <tr><td>33h</td><td>12.2</td><td>48h</td><td>16.4</td></tr> <tr><td>34h</td><td>12.4</td><td>49h</td><td>16.6</td></tr> <tr><td>35h</td><td>12.6</td><td>4Ah</td><td>16.8</td></tr> <tr><td>36h</td><td>12.8</td><td>4Bh</td><td>17</td></tr> <tr><td></td><td></td><td>Other</td><td>NA</td></tr> </tbody> </table>				A/B[7:0]	VSH1/VSH2	A/B[7:0]	VSH1/VSH2	21h	8.8	37h	13	23h	9	38h	13.2	24h	9.2	39h	13.4	25h	9.4	3Ah	13.6	26h	9.6	3Bh	13.8	27h	9.8	3Ch	14	28h	10	3Dh	14.2	29h	10.2	3Eh	14.4	2Ah	10.4	3Fh	14.6	2Bh	10.6	40h	14.8	2Ch	10.8	41h	15	2Dh	11	42h	15.2	2Eh	11.2	43h	15.4	2Fh	11.4	44h	15.6	30h	11.6	45h	15.8	31h	11.8	46h	16	32h	12	47h	16.2	33h	12.2	48h	16.4	34h	12.4	49h	16.6	35h	12.6	4Ah	16.8	36h	12.8	4Bh	17			Other	NA	<table border="1"> <thead> <tr> <th>C[7:0]</th> <th>VSL</th> </tr> </thead> <tbody> <tr><td>0Ah</td><td>-5</td></tr> <tr><td>0Ch</td><td>-5.5</td></tr> <tr><td>0Eh</td><td>-6</td></tr> <tr><td>10h</td><td>-6.5</td></tr> <tr><td>12h</td><td>-7</td></tr> <tr><td>14h</td><td>-7.5</td></tr> <tr><td>16h</td><td>-8</td></tr> <tr><td>18h</td><td>-8.5</td></tr> <tr><td>1Ah</td><td>-9</td></tr> <tr><td>1Ch</td><td>-9.5</td></tr> <tr><td>1Eh</td><td>-10</td></tr> <tr><td>20h</td><td>-10.5</td></tr> <tr><td>22h</td><td>-11</td></tr> <tr><td>24h</td><td>-11.5</td></tr> <tr><td>26h</td><td>-12</td></tr> <tr><td>28h</td><td>-12.5</td></tr> <tr><td>2Ah</td><td>-13</td></tr> <tr><td>2Ch</td><td>-13.5</td></tr> <tr><td>2Eh</td><td>-14</td></tr> <tr><td>30h</td><td>-14.5</td></tr> <tr><td>32h</td><td>-15</td></tr> <tr><td>34h</td><td>-15.5</td></tr> <tr><td>36h</td><td>-16</td></tr> <tr><td>38h</td><td>-16.5</td></tr> <tr><td>3Ah</td><td>-17</td></tr> <tr><td>Other</td><td>NA</td></tr> </tbody> </table>		C[7:0]	VSL	0Ah	-5	0Ch	-5.5	0Eh	-6	10h	-6.5	12h	-7	14h	-7.5	16h	-8	18h	-8.5	1Ah	-9	1Ch	-9.5	1Eh	-10	20h	-10.5	22h	-11	24h	-11.5	26h	-12	28h	-12.5	2Ah	-13	2Ch	-13.5	2Eh	-14	30h	-14.5	32h	-15	34h	-15.5	36h	-16	38h	-16.5	3Ah	-17	Other	NA
A/B[7:0]	VSH1/VSH2	A/B[7:0]	VSH1/VSH2																																																																																																																																																																																																																																																																																												
8Eh	2.4	AEh	5.6																																																																																																																																																																																																																																																																																												
8Fh	2.5	AFh	5.7																																																																																																																																																																																																																																																																																												
90h	2.6	B0h	5.8																																																																																																																																																																																																																																																																																												
91h	2.7	B1h	5.9																																																																																																																																																																																																																																																																																												
92h	2.8	B2h	6																																																																																																																																																																																																																																																																																												
93h	2.9	B3h	6.1																																																																																																																																																																																																																																																																																												
94h	3	B4h	6.2																																																																																																																																																																																																																																																																																												
95h	3.1	B5h	6.3																																																																																																																																																																																																																																																																																												
96h	3.2	B6h	6.4																																																																																																																																																																																																																																																																																												
97h	3.3	B7h	6.5																																																																																																																																																																																																																																																																																												
98h	3.4	B8h	6.6																																																																																																																																																																																																																																																																																												
99h	3.5	B9h	6.7																																																																																																																																																																																																																																																																																												
9Ah	3.6	BAh	6.8																																																																																																																																																																																																																																																																																												
9Bh	3.7	BBh	6.9																																																																																																																																																																																																																																																																																												
9Ch	3.8	BCh	7																																																																																																																																																																																																																																																																																												
9Dh	3.9	BDh	7.1																																																																																																																																																																																																																																																																																												
9Eh	4	BEh	7.2																																																																																																																																																																																																																																																																																												
9Fh	4.1	BFh	7.3																																																																																																																																																																																																																																																																																												
A0h	4.2	C0h	7.4																																																																																																																																																																																																																																																																																												
A1h	4.3	C1h	7.5																																																																																																																																																																																																																																																																																												
A2h	4.4	C2h	7.6																																																																																																																																																																																																																																																																																												
A3h	4.5	C3h	7.7																																																																																																																																																																																																																																																																																												
A4h	4.6	C4h	7.8																																																																																																																																																																																																																																																																																												
A5h	4.7	C5h	7.9																																																																																																																																																																																																																																																																																												
A6h	4.8	C6h	8																																																																																																																																																																																																																																																																																												
A7h	4.9	C7h	8.1																																																																																																																																																																																																																																																																																												
A8h	5	C8h	8.2																																																																																																																																																																																																																																																																																												
A9h	5.1	C9h	8.3																																																																																																																																																																																																																																																																																												
AAh	5.2	CAh	8.4																																																																																																																																																																																																																																																																																												
ABh	5.3	CBh	8.5																																																																																																																																																																																																																																																																																												
ACH	5.4	CCh	8.6																																																																																																																																																																																																																																																																																												
ADh	5.5	Other	NA																																																																																																																																																																																																																																																																																												
A/B[7:0]	VSH1/VSH2	A/B[7:0]	VSH1/VSH2																																																																																																																																																																																																																																																																																												
21h	8.8	37h	13																																																																																																																																																																																																																																																																																												
23h	9	38h	13.2																																																																																																																																																																																																																																																																																												
24h	9.2	39h	13.4																																																																																																																																																																																																																																																																																												
25h	9.4	3Ah	13.6																																																																																																																																																																																																																																																																																												
26h	9.6	3Bh	13.8																																																																																																																																																																																																																																																																																												
27h	9.8	3Ch	14																																																																																																																																																																																																																																																																																												
28h	10	3Dh	14.2																																																																																																																																																																																																																																																																																												
29h	10.2	3Eh	14.4																																																																																																																																																																																																																																																																																												
2Ah	10.4	3Fh	14.6																																																																																																																																																																																																																																																																																												
2Bh	10.6	40h	14.8																																																																																																																																																																																																																																																																																												
2Ch	10.8	41h	15																																																																																																																																																																																																																																																																																												
2Dh	11	42h	15.2																																																																																																																																																																																																																																																																																												
2Eh	11.2	43h	15.4																																																																																																																																																																																																																																																																																												
2Fh	11.4	44h	15.6																																																																																																																																																																																																																																																																																												
30h	11.6	45h	15.8																																																																																																																																																																																																																																																																																												
31h	11.8	46h	16																																																																																																																																																																																																																																																																																												
32h	12	47h	16.2																																																																																																																																																																																																																																																																																												
33h	12.2	48h	16.4																																																																																																																																																																																																																																																																																												
34h	12.4	49h	16.6																																																																																																																																																																																																																																																																																												
35h	12.6	4Ah	16.8																																																																																																																																																																																																																																																																																												
36h	12.8	4Bh	17																																																																																																																																																																																																																																																																																												
		Other	NA																																																																																																																																																																																																																																																																																												
C[7:0]	VSL																																																																																																																																																																																																																																																																																														
0Ah	-5																																																																																																																																																																																																																																																																																														
0Ch	-5.5																																																																																																																																																																																																																																																																																														
0Eh	-6																																																																																																																																																																																																																																																																																														
10h	-6.5																																																																																																																																																																																																																																																																																														
12h	-7																																																																																																																																																																																																																																																																																														
14h	-7.5																																																																																																																																																																																																																																																																																														
16h	-8																																																																																																																																																																																																																																																																																														
18h	-8.5																																																																																																																																																																																																																																																																																														
1Ah	-9																																																																																																																																																																																																																																																																																														
1Ch	-9.5																																																																																																																																																																																																																																																																																														
1Eh	-10																																																																																																																																																																																																																																																																																														
20h	-10.5																																																																																																																																																																																																																																																																																														
22h	-11																																																																																																																																																																																																																																																																																														
24h	-11.5																																																																																																																																																																																																																																																																																														
26h	-12																																																																																																																																																																																																																																																																																														
28h	-12.5																																																																																																																																																																																																																																																																																														
2Ah	-13																																																																																																																																																																																																																																																																																														
2Ch	-13.5																																																																																																																																																																																																																																																																																														
2Eh	-14																																																																																																																																																																																																																																																																																														
30h	-14.5																																																																																																																																																																																																																																																																																														
32h	-15																																																																																																																																																																																																																																																																																														
34h	-15.5																																																																																																																																																																																																																																																																																														
36h	-16																																																																																																																																																																																																																																																																																														
38h	-16.5																																																																																																																																																																																																																																																																																														
3Ah	-17																																																																																																																																																																																																																																																																																														
Other	NA																																																																																																																																																																																																																																																																																														
0	0	08	0	0	0	0	1	0	0	0	Initial Code Setting OTP Program	Program Initial Code Setting  The command required CLKEN=1. Refer to Register 0x22 for detail. BUSY pad will output high during operation.																																																																																																																																																																																																																																																																																			
0	0	09	0	0	0	0	1	0	0	1	Write Register for Initial Code Setting	Write Register for Initial Code Setting Selection A[7:0] ~ D[7:0]: Reserved Details refer to Application Notes of Initial Code Setting																																																																																																																																																																																																																																																																																			
0	1		A7	A6	A5	A4	A3	A2	A1	A0																																																																																																																																																																																																																																																																																					
0	1		B7	B6	B5	B4	B3	B2	B1	B0																																																																																																																																																																																																																																																																																					
0	1		C7	C6	C5	C4	C3	C2	C1	C0																																																																																																																																																																																																																																																																																					
0	1		D7	D6	D5	D4	D3	D2	D1	D0																																																																																																																																																																																																																																																																																					

Command Table											Command	Description																																																										
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0																																																												
0	0	0A	0	0	0	0	1	0	1	0	Read Register for Initial Code Setting	Read Register for Initial Code Setting																																																										
0	0	0C	0	0	0	0	1	1	0	0	Booster Soft start Control	Booster Enable with Phase 1, Phase 2 and Phase 3 for soft start current and duration setting.  A[7:0] -> Soft start setting for Phase1 = 8Bh [POR] B[7:0] -> Soft start setting for Phase2 = 9Ch [POR] C[7:0] -> Soft start setting for Phase3 = 96h [POR] D[7:0] -> Duration setting = 0Fh [POR]  Bit Description of each byte: A[6:0] / B[6:0] / C[6:0]: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit[6:4]</th> <th>Driving Strength Selection</th> </tr> </thead> <tbody> <tr><td>000</td><td>1(Weakest)</td></tr> <tr><td>001</td><td>2</td></tr> <tr><td>010</td><td>3</td></tr> <tr><td>011</td><td>4</td></tr> <tr><td>100</td><td>5</td></tr> <tr><td>101</td><td>6</td></tr> <tr><td>110</td><td>7</td></tr> <tr><td>111</td><td>8(Strongest)</td></tr> </tbody> </table> <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit[3:0]</th> <th>Min Off Time Setting of GDR [Time unit]</th> </tr> </thead> <tbody> <tr><td>0000</td><td>~</td></tr> <tr><td>0011</td><td>NA</td></tr> <tr><td>0100</td><td>2.6</td></tr> <tr><td>0101</td><td>3.2</td></tr> <tr><td>0110</td><td>3.9</td></tr> <tr><td>0111</td><td>4.6</td></tr> <tr><td>1000</td><td>5.4</td></tr> <tr><td>1001</td><td>6.3</td></tr> <tr><td>1010</td><td>7.3</td></tr> <tr><td>1011</td><td>8.4</td></tr> <tr><td>1100</td><td>9.8</td></tr> <tr><td>1101</td><td>11.5</td></tr> <tr><td>1110</td><td>13.8</td></tr> <tr><td>1111</td><td>16.5</td></tr> </tbody> </table> D[5:0]: duration setting of phase D[5:4]: duration setting of phase 3 D[3:2]: duration setting of phase 2 D[1:0]: duration setting of phase 1 <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>Bit[1:0]</th> <th>Duration of Phase [Approximation]</th> </tr> </thead> <tbody> <tr><td>00</td><td>10ms</td></tr> <tr><td>01</td><td>20ms</td></tr> <tr><td>10</td><td>30ms</td></tr> <tr><td>11</td><td>40ms</td></tr> </tbody> </table>	Bit[6:4]	Driving Strength Selection	000	1(Weakest)	001	2	010	3	011	4	100	5	101	6	110	7	111	8(Strongest)	Bit[3:0]	Min Off Time Setting of GDR [Time unit]	0000	~	0011	NA	0100	2.6	0101	3.2	0110	3.9	0111	4.6	1000	5.4	1001	6.3	1010	7.3	1011	8.4	1100	9.8	1101	11.5	1110	13.8	1111	16.5	Bit[1:0]	Duration of Phase [Approximation]	00	10ms	01	20ms	10	30ms	11	40ms
Bit[6:4]	Driving Strength Selection																																																																					
000	1(Weakest)																																																																					
001	2																																																																					
010	3																																																																					
011	4																																																																					
100	5																																																																					
101	6																																																																					
110	7																																																																					
111	8(Strongest)																																																																					
Bit[3:0]	Min Off Time Setting of GDR [Time unit]																																																																					
0000	~																																																																					
0011	NA																																																																					
0100	2.6																																																																					
0101	3.2																																																																					
0110	3.9																																																																					
0111	4.6																																																																					
1000	5.4																																																																					
1001	6.3																																																																					
1010	7.3																																																																					
1011	8.4																																																																					
1100	9.8																																																																					
1101	11.5																																																																					
1110	13.8																																																																					
1111	16.5																																																																					
Bit[1:0]	Duration of Phase [Approximation]																																																																					
00	10ms																																																																					
01	20ms																																																																					
10	30ms																																																																					
11	40ms																																																																					
0	1		1	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																												
0	1		1	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>																																																												
0	1		1	C <sub>6</sub>	C <sub>5</sub>	C <sub>4</sub>	C <sub>3</sub>	C <sub>2</sub>	C <sub>1</sub>	C <sub>0</sub>																																																												
0	1		0	0	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>																																																												
0	0	10	0	0	0	1	0	0	0	0	Deep Sleep mode	Deep Sleep mode Control: <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>A[1:0]</th> <th>Description</th> </tr> </thead> <tbody> <tr><td>00</td><td>Normal Mode [POR]</td></tr> <tr><td>01</td><td>Enter Deep Sleep Mode 1</td></tr> <tr><td>11</td><td>Enter Deep Sleep Mode 2</td></tr> </tbody> </table> After this command initiated, the chip will enter Deep Sleep Mode, BUSY pad will keep output high. Remark: To Exit Deep Sleep mode, User required to send HWRESET to the driver	A[1:0]	Description	00	Normal Mode [POR]	01	Enter Deep Sleep Mode 1	11	Enter Deep Sleep Mode 2																																																		
A[1:0]	Description																																																																					
00	Normal Mode [POR]																																																																					
01	Enter Deep Sleep Mode 1																																																																					
11	Enter Deep Sleep Mode 2																																																																					
0	1		0	0	0	0	0	0	A <sub>1</sub>	A <sub>0</sub>																																																												

0	0	11	0	0	0	1	0	0	0	1	Data Entry mode setting	Define data entry sequence $A[2:0] = 011$ [POR]  $A[1:0] = ID[1:0]$ Address automatic increment / decrement setting The setting of incrementing or decrementing of the address counter can be made independently in each upper and lower bit of the address. 00 –Y decrement, X decrement, 01 –Y decrement, X increment, 10 –Y increment, X decrement, 11 –Y increment, X increment [POR]  $A[2] = AM$ Set the direction in which the address counter is updated automatically after data are written to the RAM. AM= 0, the address counter is updated in the X direction. [POR] AM = 1, the address counter is updated in the Y direction.
0	1		0	0	0	0	0	$A_2$	$A_1$	$A_0$		
0	0	12	0	0	0	1	0	0	1	0	SW RESET	It resets the commands and parameters to their S/W Reset default values except R10h-Deep Sleep Mode  During operation, BUSY pad will output high.  Note: RAM data are unaffected by this command.
0	0	14	0	0	0	1	0	1	0	0	HV Ready Detection	HV ready detection $A[7:0] = 00h$ [POR] The command required CLKEN=1 and ANALOGEN=1. Refer to Register 0x22 for detail. After this command initiated, HV Ready detection starts. BUSY pad will output high during detection. The detection result can be read from the Status Bit Read (Command 0x2F).
0	1		0	$A_6$	$A_5$	$A_4$	0	$A_2$	$A_1$	$A_0$		
$A[6:4]=n$ for cool down duration: $10ms \times (n+1)$ $A[2:0]=m$ for number of Cool Down Loop to detect. The max HV ready duration is $10ms \times (n+1) \times (m)$ HV ready detection will be trigger after each cool down time. The detection will be completed when HV is ready. For 1 shot HV ready detection, $A[7:0]$ can be set as 00h.												



0	0	15	0	0	0	1	0	1	0	1	VCI Detection	<p>VCI Detection</p> <p>A[2:0] = 100 [POR] , Detect level at 2.3V</p> <p>A[2:0] : VCI level Detect</p> <table border="1"> <thead> <tr> <th>A[2:0]</th><th>VCI level</th></tr> </thead> <tbody> <tr> <td>011</td><td>2.2V</td></tr> <tr> <td>100</td><td>2.3V</td></tr> <tr> <td>101</td><td>2.4V</td></tr> <tr> <td>110</td><td>2.5V</td></tr> <tr> <td>111</td><td>2.6V</td></tr> <tr> <td>Other</td><td>NA</td></tr> </tbody> </table> <p>The command required CLKEN=1 and ANALOGEN=1 Refer to Register 0x22 for detail.</p> <p>After this command initiated, VCI detection starts. BUSY pad will output high during detection. The detection result can be read from the Status Bit Read (Command 0x2F).</p>	A[2:0]	VCI level	011	2.2V	100	2.3V	101	2.4V	110	2.5V	111	2.6V	Other	NA
A[2:0]	VCI level																									
011	2.2V																									
100	2.3V																									
101	2.4V																									
110	2.5V																									
111	2.6V																									
Other	NA																									
0	0	18	0	0	0	1	1	0	0	0	Temperature Sensor Control	<p>Temperature Sensor Selection</p> <p>A[7:0] = 48h [POR], external temperature sensor</p> <p>A[7:0] = 80h Internal temperature sensor</p>														
0	0	1A	0	0	0	1	1	0	1	0	Temperature Sensor Control (Write to temperature register)	<p>Write to temperature register.</p> <p>A[7:0] = 7Fh [POR]</p>														
0	0	1B	0	0	0	1	1	0	1	1	Temperature Sensor Control (Read from temperature register)	<p>Read from temperature register.</p>														
0	0	1C	0	0	0	1	1	1	0	0	Temperature Sensor Control (Write Command to External temperature sensor)	<p>Write Command to External temperature sensor.</p> <p>A[7:0] = 00h [POR],</p> <p>B[7:0] = 00h [POR],</p> <p>C[7:0] = 00h [POR],</p> <table border="1"> <thead> <tr> <th>A[7:6]</th><th>Select no of byte to be sent</th></tr> </thead> <tbody> <tr> <td>00</td><td>Address + pointer</td></tr> <tr> <td>01</td><td>Address + pointer + 1st parameter</td></tr> <tr> <td>10</td><td>Address + pointer + 1st parameter + 2nd pointer</td></tr> <tr> <td>11</td><td>Address</td></tr> </tbody> </table> <p>A[5:0] – Pointer Setting B[7:0] – 1<sup>st</sup> parameter C[7:0] – 2<sup>nd</sup> parameter</p> <p>The command required CLKEN=1. Refer to Register 0x22 for detail.</p> <p>After this command initiated, Write Command to external temperature sensor starts. BUSY pad will output high during operation.</p>	A[7:6]	Select no of byte to be sent	00	Address + pointer	01	Address + pointer + 1st parameter	10	Address + pointer + 1st parameter + 2nd pointer	11	Address				
A[7:6]	Select no of byte to be sent																									
00	Address + pointer																									
01	Address + pointer + 1st parameter																									
10	Address + pointer + 1st parameter + 2nd pointer																									
11	Address																									
0	0	20	0	0	1	0	0	0	0	0	Master Activation	<p>Activate Display Update Sequence</p> <p>The Display Update Sequence Option is located at R22h.</p> <p>BUSY pad will output high during operation. User should not interrupt this operation to avoid corruption of panel images.</p>														

0	0	21	0	0	1	0	0	0	0	1	Display Update Control 1	RAM content option for Display Update A[7:0] = 00h [POR] B[7:0] = 00h [POR]  A[7:4] Red RAM option <table border="1"> <tr><td>0000</td><td>Normal</td></tr> <tr><td>0100</td><td>Bypass RAM content as 0</td></tr> <tr><td>1000</td><td>Inverse RAM content</td></tr> </table> A[3:0] BW RAM option <table border="1"> <tr><td>0000</td><td>Normal</td></tr> <tr><td>0100</td><td>Bypass RAM content as 0</td></tr> <tr><td>1000</td><td>Inverse RAM content</td></tr> </table> B[7:6] Resolution select <table border="1"> <tr><td>00</td><td>Display resolution is 200x384</td></tr> <tr><td>01</td><td>Display resolution is 184x384</td></tr> <tr><td>10</td><td>Display resolution is 168x384</td></tr> <tr><td>11</td><td>Display resolution is 216x384</td></tr> </table>	0000	Normal	0100	Bypass RAM content as 0	1000	Inverse RAM content	0000	Normal	0100	Bypass RAM content as 0	1000	Inverse RAM content	00	Display resolution is 200x384	01	Display resolution is 184x384	10	Display resolution is 168x384	11	Display resolution is 216x384
0000	Normal																															
0100	Bypass RAM content as 0																															
1000	Inverse RAM content																															
0000	Normal																															
0100	Bypass RAM content as 0																															
1000	Inverse RAM content																															
00	Display resolution is 200x384																															
01	Display resolution is 184x384																															
10	Display resolution is 168x384																															
11	Display resolution is 216x384																															
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																						
0	1		B <sub>7</sub>	B <sub>6</sub>	0	0	0	0	0	0																						

0	0	22	0	0	1	0	0	0	1	0	Display Update Control 2	Display Update Sequence Option: Enable the stage for Master Activation A[7:0]= FFh (POR)
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>		

Operating sequence	Parameter (in Hex)
Enable clock signal	80
Disable clock signal	01
Enable clock signal → Enable Analog	C0
Disable Analog → Disable clock signal	03
Enable clock signal → Load LUT with DISPLAY Mode 1 → Disable clock signal	91
Enable clock signal → Load LUT with DISPLAY Mode 2 → Disable clock signal	99
Enable clock signal → Load temperature value → Load LUT with DISPLAY Mode 1 → Disable clock signal	B1
Enable clock signal → Load temperature value → Load LUT with DISPLAY Mode 2 → Disable clock signal	B9
Enable clock signal → Enable Analog → Display with DISPLAY Mode 1 → Disable Analog → Disable OSC	C7
Enable clock signal → Enable Analog → Display with DISPLAY Mode 2 → Disable Analog → Disable OSC	CF
Enable clock signal → Enable Analog → Load temperature value → DISPLAY with DISPLAY Mode 1 → Disable Analog → Disable OSC	F7
Enable clock signal → Enable Analog → Load temperature value → DISPLAY with DISPLAY Mode 2 → Disable Analog → Disable OSC	FF

0	0	24	0	0	1	0	0	1	0	0	Write RAM (Black White) / RAM 0x24	<p>After this command, data entries will be written into the BW RAM until another command is written. Address pointers will advance accordingly</p> <p>For Write pixel: Content of Write RAM(BW) = 1</p> <p>For Black pixel: Content of Write RAM(BW) = 0</p>
0	0	26	0	0	1	0	0	1	1	0	Write RAM (RED) / RAM 0x26	<p>After this command, data entries will be written into the RED RAM until another command is written. Address pointers will advance accordingly.</p> <p>For Red pixel: Content of Write RAM(RED) = 1</p> <p>For non-Red pixel [Black or White]: Content of Write RAM(RED) = 0</p>
0	0	27	0	0	1	0	0	1	1	1	Read RAM	<p>After this command, data read on the MCU bus will fetch data from RAM. According to parameter of Register 41h to select reading RAM0x24/ RAM0x26, until another command is written. Address pointers will advance accordingly.</p> <p>The 1<sup>st</sup> byte of data read is dummy data.</p>
0	0	28	0	0	1	0	1	0	0	0	VCOM Sense	<p>Enter VCOM sensing conditions and hold for duration defined in 29h before reading VCOM value.</p> <p>The sensed VCOM voltage is stored in register</p> <p>The command required CLKEN=1 and ANALOGEN=1</p> <p>Refer to Register 0x22 for detail.</p> <p>BUSY pad will output high during operation.</p>
0	0	29	0	0	1	0	1	0	0	1	VCOM Sense Duration	<p>Stabling time between entering VCOM sensing mode and reading acquired.</p> <p>A[3:0] = 9h, duration = 10s. VCOM sense duration = (A[3:0]+1) sec</p>
0	1		0	1	0	0	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>		
0	0	2A	0	0	1	0	1	0	1	0	Program VCOM OTP	<p>Program VCOM register into OTP</p> <p>The command required CLKEN=1. Refer to Register 0x22 for detail.</p> <p>BUSY pad will output high during operation.</p>

Command Table											Command	Description	
R/W#	D/C#	Hex	D7	D6	D5	D4	D3	D2	D1	D0			
0	0	2C	0	0	1	0	1	1	0	0	Write VCOM register	Write VCOM register from MCU interface A[7:0] = 00h [POR]	
0	1		A7	A6	A5	A4	A3	A2	A1	A0			
0	0	2D	0	0	1	0	1	1	0	1	OTP Register Read for Display Option	Read Register for Display Option:  A[7:0]: VCOM OTP Selection (Command 0x37, Byte A)  B[7:0]: VCOM Register (Command 0x2C)  C[7:0]~G[7:0]: Display Mode (Command 0x37, Byte B to Byte F) [5 bytes]  H[7:0]~K[7:0]: Waveform Version (Command 0x37, Byte G to Byte J) [4 bytes]	
1	1		A7	A6	A5	A4	A3	A2	A1	A0			
1	1		B7	B6	B5	B4	B3	B2	B1	B0			
1	1		C7	C6	C5	C4	C3	C2	C1	C0			
1	1		D7	D6	D5	D4	D3	D2	D1	D0			
1	1		E7	E6	E5	E4	E3	E2	E1	E0			
1	1		F7	F6	F5	F4	F3	F2	F1	F0			
1	1		G7	G6	G5	G4	G3	G2	G1	G0			
1	1		H7	H6	H5	H4	H3	H2	H1	H0			
1	1		I7	I6	I5	I4	I3	I2	I1	I0			
1	1		J7	J6	J5	J4	J3	J2	J1	J0			
1	1		K7	K6	K5	K4	K3	K2	K1	K0			
0	0	2E	0	0	1	0	1	1	1	0	User ID Read	Read 30 Byte User ID stored in OTP: A[7:0]~AD[7:0]: UserID (R38, Byte A and Byte AD) [30 bytes]	
1	1		A7	A6	A5	A4	A3	A2	A1	A0			
1	1		B7	B6	B5	B4	B3	B2	B1	B0			
1	1		C7	C6	C5	C4	C3	C2	C1	C0			
1	1		.	.	.	.	.	.	.	.			
1	1		.	.	.	.	.	.	.	.			
1	1		Z7	Z6	Z5	Z4	Z3	Z2	Z1	Z0			
1	1		AA7	AA6	AA5	AA4	AA3	AA2	AA1	AA0			
1	1		AB7	AB6	AB5	AB4	AB3	AB2	AB1	AB0			
1	1		AC7	AC6	AC	AC4	AC3	AC2	AC1	AC0			
1	1		AD7	AD6	AD5	AD4	AD3	AD2	AD1	AD0			
0	0	2F	0	0	1	0	1	1	1	1	Status Bit Read	Read IC status Bit [POR 0x01]	
1	1		0	0	A5	A4	0	0	A1	A0		A[5]: HV Ready Detection flag [POR=0] 0: Ready 1: Not Ready A[4]: VCI Detection flag [POR=0] 0: Normal 1: VCI lower than the Detect level A[3]: [POR=0] A[2]: Busy flag [POR=0] 0: Normal 1: BUSY A[1:0]: Chip ID [POR=01]  Remark: A[5] and A[4] status are not valid after RESET, they need to be initiated by command 0x14 and command 0x15 respectively.	

0	0	30	0	0	1	1	0	0	0	0	Program WS OTP	<p>Program OTP of Waveform Setting The contents should be written into RAM before sending this command.</p> <p>The command required CLKEN=1. Refer to Register 0x22 for detail. BUSY pad will output high during operation.</p>
0	0	31	0	0	1	1	0	0	0	1	Load WS OTP	<p>Load OTP of Waveform Setting</p> <p>The command required CLKEN=1. Refer to Register 0x22 for detail.</p> <p>BUSY pad will output high during operation.</p>
0	0	32	0	0	1	1	0	0	1	0	Write LUT register	<p>Write LUT register from MCU interface [227 bytes], which contains the content of VS[nX-LUTm], TP[nX], RP[n], SR[nXY], FR and XON[nXY]</p> <p>Refer to Session 6.7 WAVEFORM SETTING</p>
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>		
0	1		B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>		
0	1		:	:	:	:	:	:	:	:		
0	1		.	..	.	.	.	.	.	.		
0	0	34	0	0	1	1	0	1	0	0	CRC calculation	<p>CRC calculation command For details, please refer to SSD1685 application note.</p> <p>BUSY pad will output high during operation.</p>
0	0	35	0	0	1	1	0	1	0	1	CRC Status Read	<p>CRC Status Read A[15:0] is the CRC read out value</p>
1	1		A <sub>15</sub>	A <sub>14</sub>	A <sub>13</sub>	A <sub>12</sub>	A <sub>11</sub>	A <sub>10</sub>	A <sub>9</sub>	A <sub>8</sub>		
1	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>		
0	0	36	0	0	1	1	0	1	1	0	Program OTP selection	<p>Program OTP Selection according to the OTP Selection Control [R37h and R38h]</p> <p>The command required CLKEN=1. Refer to Register 0x22 for detail. BUSY pad will output high during operation.</p>
0	0	37	0	0	1	1	0	1	1	1	Write Register for Display Option	<p>Write Register for Display Option A[7] Spare VCOM OTP selection 0: Default [POR] 1: Spare</p> <p>B[7:0] Display Mode for WS[7:0] C[7:0] Display Mode for WS[15:8] D[7:0] Display Mode for WS[23:16] 0: Display Mode 1 1: Display Mode 2</p> <p>F[6]: Ping-Pong for Display Mode 2 0: RAM Ping-Pong disable [POR] 1: RAM Ping-Pong enable</p> <p>G[7:0]~J[7:0] module ID /waveform version.</p> <p>Remarks: 1) A[7:0]~J[7:0] can be stored in OTP 2) RAM Ping-Pong function is not support for Display Mode 1</p>
0	1		A <sub>7</sub>	0	0	0	0	0	0	0		
0	1		B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>		
0	1		C <sub>7</sub>	C <sub>6</sub>	C <sub>5</sub>	C <sub>4</sub>	C <sub>3</sub>	C <sub>2</sub>	C <sub>1</sub>	C <sub>0</sub>		
0	1		D <sub>7</sub>	D <sub>6</sub>	D <sub>5</sub>	D <sub>4</sub>	D <sub>3</sub>	D <sub>2</sub>	D <sub>1</sub>	D <sub>0</sub>		
0	1		E <sub>7</sub>	E <sub>6</sub>	E <sub>5</sub>	E <sub>4</sub>	E <sub>3</sub>	E <sub>2</sub>	E <sub>1</sub>	E <sub>0</sub>		
0	1		0	F <sub>6</sub>	0	0	F <sub>3</sub>	F <sub>2</sub>	F <sub>1</sub>	F <sub>0</sub>		
0	1		G <sub>7</sub>	G <sub>6</sub>	G <sub>5</sub>	G <sub>4</sub>	G <sub>3</sub>	G <sub>2</sub>	G <sub>1</sub>	G <sub>0</sub>		
0	1		H <sub>7</sub>	H <sub>6</sub>	H <sub>5</sub>	H <sub>4</sub>	H <sub>3</sub>	H <sub>2</sub>	H <sub>1</sub>	H <sub>0</sub>		
0	1		I <sub>7</sub>	I <sub>6</sub>	I <sub>5</sub>	I <sub>4</sub>	I <sub>3</sub>	I <sub>2</sub>	I <sub>1</sub>	I <sub>0</sub>		
0	1		J <sub>7</sub>	J <sub>6</sub>	J <sub>5</sub>	J <sub>4</sub>	J <sub>3</sub>	J <sub>2</sub>	J <sub>1</sub>	J <sub>0</sub>		

0	0	38	0	0	1	1	1	0	0	0	Write Register for User ID	Write Register for User ID A[7:0]~AD[7:0]: UserID [30 bytes]  Remarks: A[7:0]~AD[7:0] can be stored in OTP																														
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																
0	1		B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>																																
0	1		C <sub>7</sub>	C <sub>6</sub>	C <sub>5</sub>	C <sub>4</sub>	C <sub>3</sub>	C <sub>2</sub>	C <sub>1</sub>	C <sub>0</sub>																																
0	1		.	.	.	.	.	.	.	.																																
0	1		Z <sub>7</sub>	Z <sub>6</sub>	Z <sub>5</sub>	Z <sub>4</sub>	Z <sub>3</sub>	Z <sub>2</sub>	Z <sub>1</sub>	Z <sub>0</sub>																																
0	1		AA <sub>7</sub>	AA <sub>6</sub>	AA <sub>5</sub>	AA <sub>4</sub>	AA <sub>3</sub>	AA <sub>2</sub>	AA <sub>1</sub>	AA <sub>0</sub>																																
0	1		AB <sub>7</sub>	AB <sub>6</sub>	AB <sub>5</sub>	AB <sub>4</sub>	AB <sub>3</sub>	AB <sub>2</sub>	AB <sub>1</sub>	AB <sub>0</sub>																																
0	1		AC <sub>7</sub>	AC <sub>6</sub>	AC <sub>5</sub>	AC <sub>4</sub>	AC <sub>3</sub>	AC <sub>2</sub>	AC <sub>1</sub>	AC <sub>0</sub>																																
0	1		AD <sub>7</sub>	AD <sub>6</sub>	AD <sub>5</sub>	AD <sub>4</sub>	AD <sub>3</sub>	AD <sub>2</sub>	AD <sub>1</sub>	AD <sub>0</sub>																																
0	0	39	0	0	1	1	1	0	0	1	OTP program mode	OTP program mode A[1:0] = 00: Normal Mode [POR] A[1:0] = 11: Internal generated OTP programming voltage  Remark: User is required to EXACTLY follow the reference code sequences																														
0	1		0	0	0	0	0	0	A <sub>1</sub>	A <sub>0</sub>																																
0	0	3C	0	0	1	1	1	1	0	0	Border Waveform Control	Select border waveform for VBD A[7:0] = C0h [POR], set VBD as HiZ. A [7:6] :Select VBD option <table border="1" style="width: 100%;"> <tr> <td>A[7:6]</td><td>Select VBD as</td></tr> <tr> <td>00</td><td>GS Transition, Defined in A[2] and A[1:0]</td></tr> <tr> <td>01</td><td>Fix Level, Defined in A[5:4]</td></tr> <tr> <td>10</td><td>VCOM</td></tr> <tr> <td>11[POR]</td><td>HiZ</td></tr> </table> A [5:4] Fix Level Setting for VBD <table border="1" style="width: 100%;"> <tr> <td>A[5:4]</td><td>VBD level</td></tr> <tr> <td>00</td><td>VSS</td></tr> <tr> <td>01</td><td>VSH1</td></tr> <tr> <td>10</td><td>VSL</td></tr> <tr> <td>11</td><td>VSH2</td></tr> </table> A [1:0] GS Transition setting for VBD VBD Level Selection: 00b: VCOM ; 01b: VSH1; 10b: VSL; 11b: VSH2 <table border="1" style="width: 100%;"> <tr> <td>A[1:0]</td><td>VBD Transition</td></tr> <tr> <td>00</td><td>LUT0</td></tr> <tr> <td>01</td><td>LUT1</td></tr> <tr> <td>10</td><td>LUT2</td></tr> <tr> <td>11</td><td>LUT3</td></tr> </table>	A[7:6]	Select VBD as	00	GS Transition, Defined in A[2] and A[1:0]	01	Fix Level, Defined in A[5:4]	10	VCOM	11[POR]	HiZ	A[5:4]	VBD level	00	VSS	01	VSH1	10	VSL	11	VSH2	A[1:0]	VBD Transition	00	LUT0	01	LUT1	10	LUT2	11	LUT3
A[7:6]	Select VBD as																																									
00	GS Transition, Defined in A[2] and A[1:0]																																									
01	Fix Level, Defined in A[5:4]																																									
10	VCOM																																									
11[POR]	HiZ																																									
A[5:4]	VBD level																																									
00	VSS																																									
01	VSH1																																									
10	VSL																																									
11	VSH2																																									
A[1:0]	VBD Transition																																									
00	LUT0																																									
01	LUT1																																									
10	LUT2																																									
11	LUT3																																									
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	0	0	A <sub>1</sub>	A <sub>0</sub>																																
0	0	3F	0	0	1	1	1	1	1	1	End Option (EOPT)	Option for LUT end Set this byte to 22h																														
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																
0	0	41	0	1	0	0	0	0	0	1	Read RAM Option	Read RAM Option A[0]= 0 [POR] 0 : Read RAM corresponding to RAM0x24 1 : Read RAM corresponding to RAM0x26																														
0	1		0	0	0	0	0	0	0	A <sub>0</sub>																																
0	0	45	0	1	0	0	0	1	0	1	Set Ram Y- address Start / End position	Specify the start/end positions of the window address in the Y direction by an address unit for RAM  A[8:0]: YSA[8:0], YStart, POR = 000h B[8:0]: YEA[8:0], YEnd, POR = 17Fh																														
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																
0	1		0	0	0	0	0	0	0	A <sub>8</sub>																																
0	1		B <sub>7</sub>	B <sub>6</sub>	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>																																
0	1		0	0	0	0	0	0	0	B <sub>8</sub>																																

0	0	44	0	1	0	0	0	1	0	0	Set RAM X - address Start / End position	Specify the start/end positions of the window address in the X direction by an address unit for RAM  A[5:0]: XSA[5:0], XStart, POR = 00h B[5:0]: XEA[5:0], XEnd, POR = 18h																																																											
0	1		0	0	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																													
0	1		0	0	B <sub>5</sub>	B <sub>4</sub>	B <sub>3</sub>	B <sub>2</sub>	B <sub>1</sub>	B <sub>0</sub>																																																													
0	0	46	0	1	0	0	0	1	1	0	Auto Write RED RAM for Regular Pattern	Auto Write RED RAM for Regular Pattern A[7:0] = 00h [POR]  A[7]: The 1st step value, POR = 0 A[6:4]: Step Height, POR= 000 Step of alter RAM in Y-direction according to Gate <table border="1"> <thead> <tr> <th>A[6:4]</th><th>Height</th><th>A[6:4]</th><th>Height</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>256</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>384</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 168x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>168</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table>	A[6:4]	Height	A[6:4]	Height	000	8	100	128	001	16	101	256	010	32	110	384	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	168	010	32	110	NA	011	64	111	NA																			
A[6:4]	Height	A[6:4]	Height																																																																				
000	8	100	128																																																																				
001	16	101	256																																																																				
010	32	110	384																																																																				
011	64	111	NA																																																																				
A[2:0]	Width	A[2:0]	Width																																																																				
000	8	100	128																																																																				
001	16	101	168																																																																				
010	32	110	NA																																																																				
011	64	111	NA																																																																				
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	0	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>	A[2:0]: Step Width for 184x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>184</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 200x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>200</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 216x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>216</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> BUSY pad will output high during operation.	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	184	010	32	110	NA	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	200	010	32	110	NA	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	216	010	32	110	NA	011	64	111	NA
A[2:0]	Width	A[2:0]	Width																																																																				
000	8	100	128																																																																				
001	16	101	184																																																																				
010	32	110	NA																																																																				
011	64	111	NA																																																																				
A[2:0]	Width	A[2:0]	Width																																																																				
000	8	100	128																																																																				
001	16	101	200																																																																				
010	32	110	NA																																																																				
011	64	111	NA																																																																				
A[2:0]	Width	A[2:0]	Width																																																																				
000	8	100	128																																																																				
001	16	101	216																																																																				
010	32	110	NA																																																																				
011	64	111	NA																																																																				

0	0	47	0	1	0	0	0	1	1	1	Auto Write B/W RAM for Regular Pattern	Auto Write B/W RAM for Regular Pattern A[7:0] = 00h [POR]  A[7]: The 1st step value, POR = 0 A[6:4]: Step Height, POR= 000 Step of alter RAM in Y-direction according to Gate <table border="1"> <thead> <tr> <th>A[6:4]</th><th>Height</th><th>A[6:4]</th><th>Height</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>256</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>384</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 168x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>168</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 184x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>184</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 200x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>200</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> A[2:0]: Step Width for 216x384, POR= 000 Step of alter RAM in X-direction according to Source <table border="1"> <thead> <tr> <th>A[2:0]</th><th>Width</th><th>A[2:0]</th><th>Width</th></tr> </thead> <tbody> <tr> <td>000</td><td>8</td><td>100</td><td>128</td></tr> <tr> <td>001</td><td>16</td><td>101</td><td>216</td></tr> <tr> <td>010</td><td>32</td><td>110</td><td>NA</td></tr> <tr> <td>011</td><td>64</td><td>111</td><td>NA</td></tr> </tbody> </table> During operation, BUSY pad will output high.	A[6:4]	Height	A[6:4]	Height	000	8	100	128	001	16	101	256	010	32	110	384	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	168	010	32	110	NA	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	184	010	32	110	NA	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	200	010	32	110	NA	011	64	111	NA	A[2:0]	Width	A[2:0]	Width	000	8	100	128	001	16	101	216	010	32	110	NA	011	64	111	NA
A[6:4]	Height	A[6:4]	Height																																																																																																													
000	8	100	128																																																																																																													
001	16	101	256																																																																																																													
010	32	110	384																																																																																																													
011	64	111	NA																																																																																																													
A[2:0]	Width	A[2:0]	Width																																																																																																													
000	8	100	128																																																																																																													
001	16	101	168																																																																																																													
010	32	110	NA																																																																																																													
011	64	111	NA																																																																																																													
A[2:0]	Width	A[2:0]	Width																																																																																																													
000	8	100	128																																																																																																													
001	16	101	184																																																																																																													
010	32	110	NA																																																																																																													
011	64	111	NA																																																																																																													
A[2:0]	Width	A[2:0]	Width																																																																																																													
000	8	100	128																																																																																																													
001	16	101	200																																																																																																													
010	32	110	NA																																																																																																													
011	64	111	NA																																																																																																													
A[2:0]	Width	A[2:0]	Width																																																																																																													
000	8	100	128																																																																																																													
001	16	101	216																																																																																																													
010	32	110	NA																																																																																																													
011	64	111	NA																																																																																																													
0	0	4E	0	1	0	0	1	1	1	0	Set RAM X address counter	Make initial settings for the RAM X address in the address counter (AC) A[5:0]: 00h [POR].																																																																																																				
0	1		0	0	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																																																																						
0	0	4F	0	1	0	0	1	1	1	1	Set RAM Y address counter	Make initial settings for the RAM Y address in the address counter (AC) A[8:0]: 000h [POR].																																																																																																				
0	1		A <sub>7</sub>	A <sub>6</sub>	A <sub>5</sub>	A <sub>4</sub>	A <sub>3</sub>	A <sub>2</sub>	A <sub>1</sub>	A <sub>0</sub>																																																																																																						
0	1		0	0	0	0	0	0	0	A <sub>8</sub>																																																																																																						
0	0	7F	0	1	1	1	1	1	1	1	NOP	This command is an empty command; it does not have any effect on the display module. However, it can be used to terminate Frame Memory Write or Read Commands.																																																																																																				



## 8. Optical Specifications

Measurements are made with that the illumination is under an angle of 45 degree, the detection is perpendicular unless otherwise specified


Symbol	Parameter	Conditions	Min	Typ.	Max	Units	Notes
R	White Reflectivity	White	30	35	-	%	8-1
CR	Contrast Ratio	Indoor	8:1		-		8-2
GN	2Grey Level	-		$DS+(WS-DS)*n(m-1)$			8-3
T update	Image update time	at 25 °C		3	-	sec	
Life		Topr		1000000times or 5years			

Notes: 8-1. Luminance meter: Eye-One Pro Spectrophotometer.

8-2. CR=Surface Reflectance with all white pixel/Surface Reflectance with all black pixels.

8-3. WS: White state, DS: Dark state

## 9. Typical Application Circuit

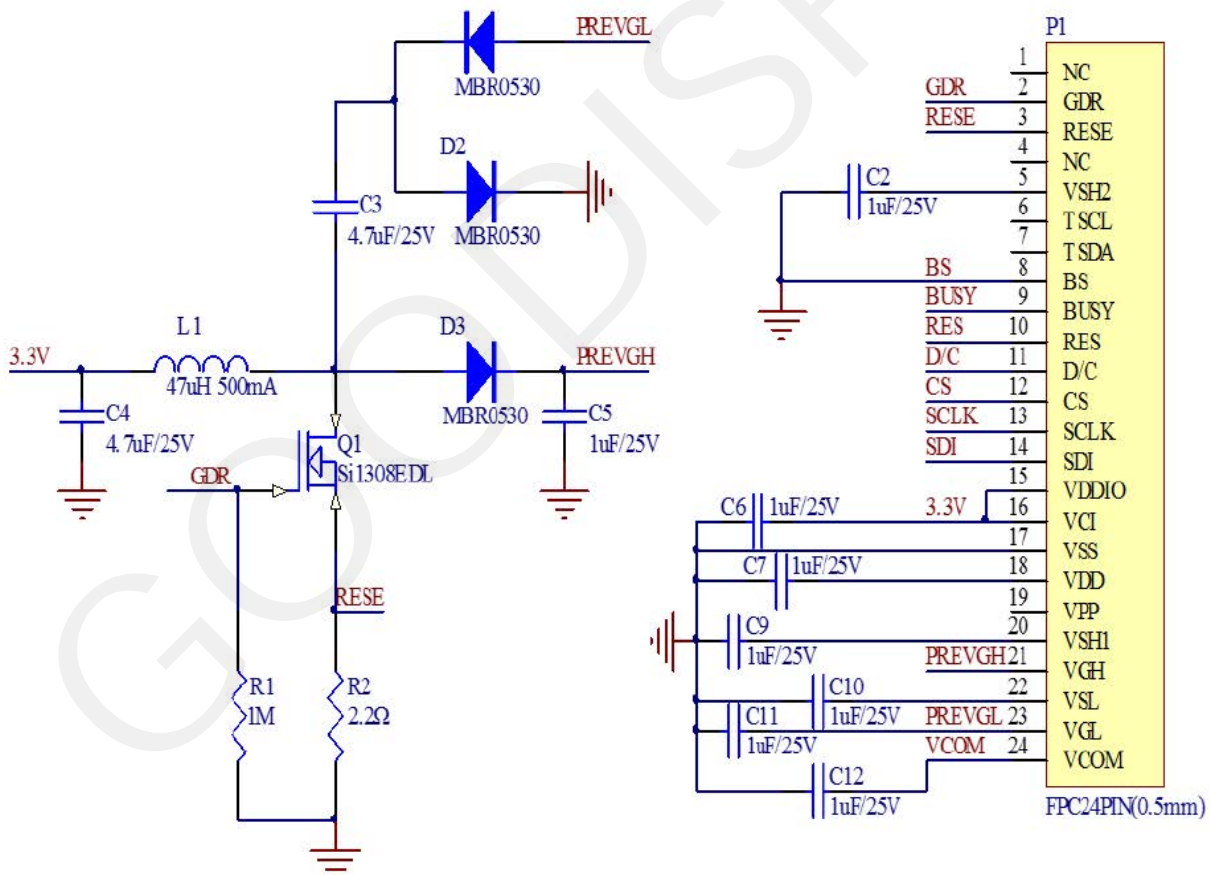

## 10. Reliability test

NO	Test items	Test condition
1	Low-Temperature Storage	T = -25°C, 240 h Test in white pattern
2	High-Temperature Storage	T=60° C, RH=35%, 240h Test in white pattern
3	High-Temperature Operation	T=50° C, RH=35%, 240h
4	Low-Temperature Operation	T=0° C, 240h
5	High-Temperature, High-Humidity Operation	T=40° C, RH=80%, 240h
6	High Temperature, High Humidity Storage	T=50° C, RH=90%, 240h Test in white pattern
7	Temperature Cycle	1 cycle:[-25° C 30min]→[+60° C 30 min] : 50 cycles Test in white pattern
8	UV exposure Resistance	765W/m <sup>2</sup> for 168hrs,40 °C Test in white pattern
9	ESD Gun	Air+/-15KV;Contact+/-8KV (Test finished product shell, not display only) Air+/-8KV;Contact+/-6KV (Naked EPD display, no including IC and FPC area) Air+/-4KV;Contact+/-2KV (Naked EPD display, including IC and FPC area)

Note: Put in normal temperature for 1hour after test finished, display performance is ok.

## 11. Matched Development Kit

Our Development Kit designed for SPI E-paper Display aims to help users to learn how to use E-paper Display more easily. It can refresh black-white E-paper Display, three-color (black, white and red/Yellow) E-paper Display and four-color(black, white, red and yellow) Good Display `s E-paper Display. And it is also added the functions of USB serial port, FLASH chip, font chip, current detection ect.

Development Kit consists of the development board and the pinboard.

Supported development platforms include STM32, ESP32, ESP8266, Arduino UNO, etc. More details, please click to the following links:

STM32 <https://www.good-display.com/product/219.html>

ESP32 <https://www.good-display.com/product/338.html>


ESP8266 <https://www.good-display.com/product/220.html>

Arduino UNO <https://www.good-display.com/product/222.html>



## 12. Typical Operating Sequence


### 12.1 Normal Operation Flow

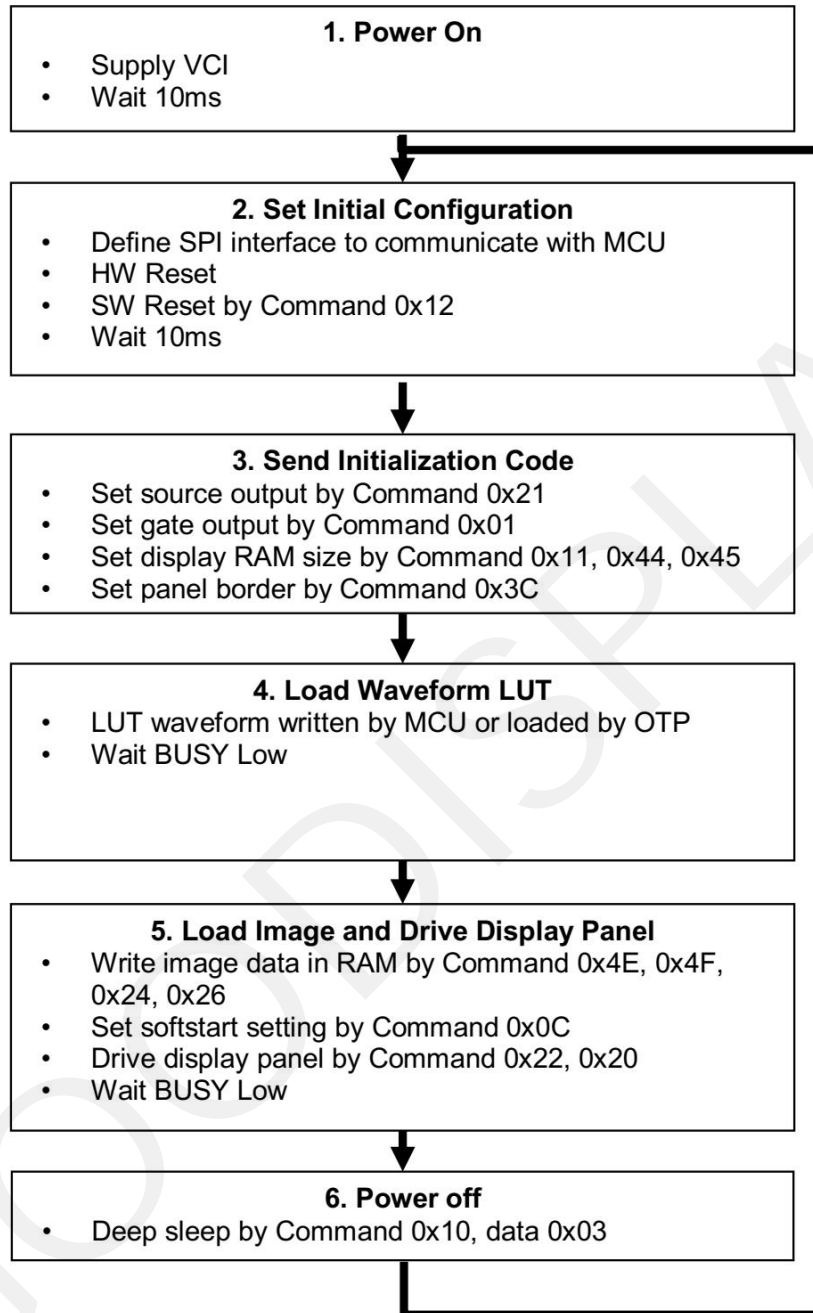

### 13. Inspection method and condition


#### 13. 1 Inspection condition

Item	Condition
Illuminance	800~1500 lux
Temperature	22°C ± 3°C
Humidity	55 ± 10 %RH
Distance	≥30cm
Angle	Vertical fore and aft 45
Inspection method	By eyes

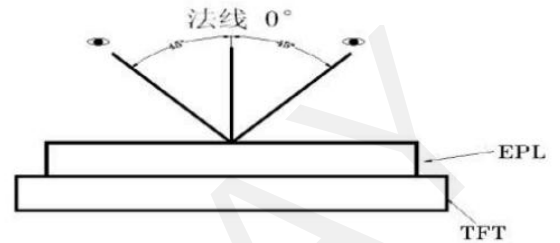


#### 13. 2 Zone definition


- A Zone: Active area
- B Zone: Border zone
- C Zone: From B zone edge to panel edge










### 13. 3 General inspection standards for products




#### 13.3.1 Appearance inspection standard

Inspection item		Figure		A zone inspection standard	B/C zone	Inspection method	MAJ/ MIN
Spot defects	Spot defects such as dot, foreign matter, air bubble, and dent etc.	Diameter $D=(L+W)/2$ (L-length, W-width) Measuring method shown in the figure below 	The distance between the two spots should not be less than 10mm	7.5"-13.3"Module (Not include 7.5") :	Foreign matter	Check by eyes	MIN
				$D > 1\text{mm}$ N=0 $0.5 < D \leq 0.8$ $N \leq 4$ $D \leq 0.5$ Ignore $0.8 < D \leq 1$ $N \leq 2$			
				4.2"-7.5"Module (Not include 4.2") :	D≤1mm	Film gauge	
				$D > 0.5$ N=0 $0.4 < D \leq 0.5$ $N \leq 2$ $D \leq 0.25$ Ignore $0.25 < D \leq 0.4$ $N \leq 4$	Pass		
				Module below 4.2" :			
				$D > 0.5$ N=0 $0.4 < D \leq 0.5$ $N \leq 1$ $D \leq 0.25$ Ignore $0.25 < D \leq 0.4$ $N \leq 4$			
				$0.1\text{mm} < D \leq 0.25$ $N \leq 3/\text{cm}^2$			

Inspection item		Figure		A zone inspection standard	B/C zone	Inspection method	MAJ/ MIN
Line defects	Line defects such as scratch, hair etc.	L-Length, W-Width, $(W/L) < 1/4$ Judged by line, $(W/L) \geq 1/4$ Judged by dot 	The distance between the two lines should not be less than 5mm	7.5"-13.3"Module (Not include 7.5") :	Ignore	Check by eyes	MIN
				$L > 10\text{mm}, N=0$ $W > 0.8\text{mm}, N=0$ $5\text{mm} \leq L \leq 10\text{mm}, 0.5\text{mm} \leq W \leq 0.8\text{mm}$ $N \leq 2$ $L \leq 5\text{mm}, W \leq 0.5\text{mm}$ Ignore			
				4.2"-7.5"Module (Not include 4.2") :		Film gauge	
				$L > 8\text{mm}, N=0$ $W > 0.2\text{mm}, N=0$ $2\text{mm} \leq L \leq 8\text{mm}, 0.1\text{mm} \leq W \leq 0.2\text{mm}$ $N \leq 4$ $L \leq 2\text{mm}, W \leq 0.1\text{mm}$ Ignore			
				Module below 4.2" :			
				$L > 5\text{mm}, N=0$ $W > 0.2\text{mm}, N=0$ $2\text{mm} \leq L \leq 5\text{mm}, 0.1\text{mm} \leq W \leq 0.2\text{mm}$ $N \leq 4$ $L \leq 2\text{mm}, W \leq 0.1\text{mm}$ Ignore			

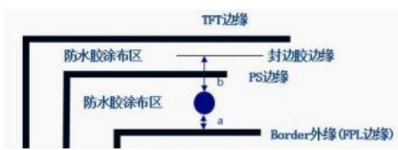Inspection item		Figure	Inspection standard	Inspection method	MAJ/ MIN
Panel chipping and crack defects	TFT panel chipping	X the length, Y the width, Z the chipping height, T the thickness of the panel 	Chipping at the edge: Module over 7.5" (Include 7.5") : $X \leq 6\text{mm}, Y \leq 1\text{mm}$ $Z \leq T$ $N=3$ Allowed Module below 7.5"(Not include 7.5"): $X \leq 3\text{mm}, Y \leq 1\text{mm}$ $Z \leq T$ $N=3$ Allowed Chipping on the corner: IC side $X \leq 2\text{mm}$ $Y \leq 2\text{mm}$ , Non-IC side $X \leq 1\text{mm}$ $Y \leq 1\text{mm}$ . Allowed Note: Chipping should not damage the edge wiring. If it does not affect the display, allowed	Check by eyes、 Film gauge	MIN
	Crack		Crack at any zone of glass ,                      Not allowed	Check by eyes、 Film gauge	MIN
	Burr edge		No exceed the positive and negative deviation of the outline dimensions $X+Y \leq 0.2\text{mm}$ Allowed	Calliper	MIN
	Curl of panel		Curl height $H \leq \text{Total panel length } 1\%$ Allowed	Check by eyes	MIN

Inspection item		Figure	Inspection standard	Inspection method	MAJ / MIN
PS defect	Water proof film		<ol style="list-style-type: none"> <li>1. Waterproof film damage, wrinkled, open edge, not allowed</li> <li>2. Exceeding the edge of module(according to the lamination drawing) Not allowed</li> <li>3. Edge warped exceeds height of technical file, not allowed</li> </ol>	Check by eyes	MIN
RTV defect	Adhesive effect		<p>Adhesive height exceeds the display surface, not allowed</p> <ol style="list-style-type: none"> <li>1. Overflow, exceeds the panel side edge, affecting the size, not allowed</li> <li>2. No adhesive at panel edge <math>\leq 1\text{mm}</math>, no exposure of wiring, allowed</li> <li>3. No adhesive at edge and corner <math>1*1\text{mm}</math>, no exposure of wiring, allowed</li> </ol>	Check by eyes	MIN
	Adhesive re-fill		<p>Protection adhesive, coverage width within <math>W \leq 1.5\text{mm}</math>, no break of adhesive, allowed</p> <p>Dispensing is uniform, without obvious concave and breaking, bubbling and swell, not higher than the upper surface of the PS, and the diameter of the adhesive re-filling is not more than 8mm, allowed</p>	Check by eyes	MIN
EC defect	Adhesive bubble		<ol style="list-style-type: none"> <li>1. Effective edge sealing area of hot melt products <math>\geq 1/2</math> edge sealing area;</li> <li>2. Bubble <math>a+b \geq 1/2</math> effective width, <math>N \leq 3</math>, spacing <math>\geq 5\text{mm}</math>, allowed</li> </ol> <p>No exposure of wiring, allowed</p>	Check by eyes	MIN

Inspection item		Figure	Inspection standard	Inspection method	MAJ / MIN
EC defect	Adhesive effect		<ol style="list-style-type: none"> <li>1. Overflow, exceeds the panel side edge, affecting the size, not allowed</li> <li>2. No adhesive at panel edge <math>\leq 1\text{mm}</math>, no exposure of wiring, allowed</li> <li>3. No adhesive at edge and corner <math>1*1\text{mm}</math>, no exposure of wiring, allowed</li> <li>4. Adhesive height exceeds the display surface, not allowed</li> </ol>	Visual, caliper	MIN
Silver dot adhesive defect	Silver dot adhesive		<ol style="list-style-type: none"> <li>1. Single silver dot dispensing amount <math>\geq 1\text{mm}</math>, allowed</li> <li>2. One of the double silver dot dispensing amount is <math>\geq 1\text{mm}</math> and the other has adhesive (no reference to 1mm) Allowed</li> </ol>	Visual	MIN
			Silver dot dispensing residue on the panel $\leq 0.2\text{mm}$ , allowed	Film gauge	MIN
FPC defect	FPC wiring		FPC, TCP damage / gold finger peroxidation, adhesive residue, not allowed	Visual	MIJ
	FPC golden finger		The height of burr edge of TCP punching surface $\geq 0.4\text{mm}$ , not allowed	Caliper	MIN
	FPC damage/cr ease		<p>Damage and breaking, not allowed</p> <p>Crease does not affect the electrical performance display, allowed</p>	Check by eyes	MIN

Inspection item		Figure	Inspection standard	Inspection method	MAJ/ MIN
Protective film defect	Protective film		Scratch and crease on the surface but no affect to protection function, allowed	Check by eyes	MIN
			Adhesive at edge $L \leq 5\text{mm}$ , $W \leq 0.5\text{mm}$ , $N=2$ , no entering into viewing area	Check by eyes	MIN
Stain defect	Stain		If stain can be normally wiped clean by $> 99\%$ alcohol, allowed	Visual	MIN
Pull tab defect	Pull tab		The position and direction meet the document requirements, and ensure that the protective film can be pulled off.	Check by eyes/ Manual pulling	MIN
Shading tape defect	Shading tape		Tilt $\leq 10^\circ$ , flat without warping, completely covering the IC.	Check by eyes/ Film gauge	MIN
Stiffener	Stiffener		Flat without warping, Exceeding the left and right edges of the FPC is not allowed. Left and right can be less than 0.5mm from FPC edge	Check by eyes	MIN
Label	Label/ Spraying code		The content meets the requirements of the work sheet. The attaching position meets the requirements of the technical documents.	Check by eyes	MIN

GOODDISPLAY




## 14. Packaging

**PACKLING ORDER:**

1) Putting 20 pcs Modules on each PET tray. Product with EPE pad on top.


2) Putting 18 pcs PET trays together with 1 empty tray on the top of PET tray. the tray together with rubber band.

3) Insert in the ESD bag, add desiccant in the ESD bag. Plastic sealing.

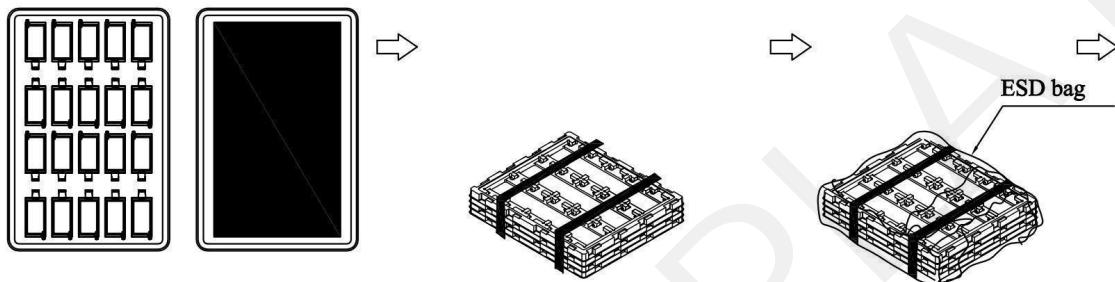

4) Inside the outer box, The box is filled with EPE pad from top to bottom, front to back.

5) Packing finished

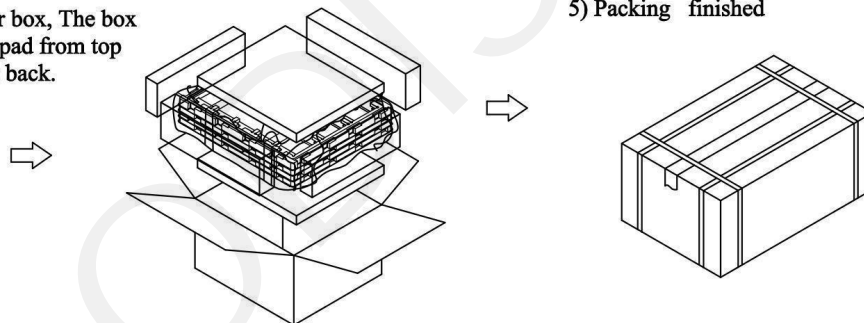

Note:  $20 \times (19-1) = 360$  pcs/Outcarton

Dimension (Out carton ): 500\*350\*205mm

## 15. Handling, Safety and Environmental Requirements

### WARNING

The display glass may break when it is dropped or bumped on a hard surface. Handle with care.  
Should the display break, do not touch the electrophoretic material. In case of contact with electrophoretic material, wash with water and soap.

### CAUTION

The display module should not be exposed to harmful gases, such as acid and alkali gases, which corrode electronic components.

Disassembling the display module can cause permanent damage and invalidate the warranty agreements.

Observe general precautions that are common to handling delicate electronic components. The glass can break and front surfaces can easily be damaged. Moreover the display is sensitive to static electricity and other rough environmental conditions.

### Data sheet status

Product specification	The data sheet contains final product specifications.
-----------------------	---

### Limiting values

Limiting values given are in accordance with the Absolute Maximum Rating System (IEC 134).

Stress above one or more of the limiting values may cause permanent damage to the device.

These are stress ratings only and operation of the device at these or any other conditions above those given in the Characteristics sections of the specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

### Application information

Where application information is given, it is advisory and does not form part of the specification.

### Product Environmental certification

RoHS
------

## 16. Precautions

- (1) Do not apply pressure to the EPD panel in order to prevent damaging it.
- (2) Do not connect or disconnect the interface connector while the EPD panel is in operation.
- (3) Do not touch IC bonding area. It may scratch TFT lead or damage IC function.
- (4) Please be mindful of moisture to avoid its penetration into the EPD panel, which may cause damage during operation.
- (5) If the EPD Panel / Module is not refreshed every 24 hours, a phenomena known as "Ghosting" or "Image Sticking" may occur. It is recommended to refreshed the ESL / EPD Tag every 24 hours in use case. It is recommended that customer ships or stores the ESL / EPD Tag with a completely white image to avoid this issue
- (6) High temperature, high humidity, sunlight or fluorescent light may degrade the EPD panel's performance. Please do not expose the unprotected EPD panel to high temperature, high humidity, sunlight, or fluorescent for long periods of time.