

ELS-R



Easy Level Sensor

Level detection at low level price
经济型料位开关

Easy Level Sensor

经济型料位开关



- 超高性价比 - 为您量身定制的料位开关，以满足您各种料位测量需求
- 可靠性高，应用简易 - 理想型标准化的料位仪表简化您料位测量过程
- 德国制造 - 德国设计

上海物位帝国际贸易有限公司

地址：上海市闵行区华漕镇朱建路333弄7号楼1层

电话：+86-21-64684193/4197/9669

+86-21-64069661/9526/9262

传真：+86-21-64696707

网站：www.uwt.cn

ELS-R 性能参数:

外壳:
铸铝外壳，带防腐涂层
防护等级IP 67

POM树脂过程连接:
G 1 1/2" / G 2 1/2"

延展方式:
130 mm延展长度
不锈钢

供电电压:
ELS-R 1: 115/230 V AC
ELS-R 2: 24 V DC

过程温度:
-25°C - +80°C

过程压力:
-0,9 bar - +0,8 bar



ELS-R series

Rotary paddle Level-Limit-Sensor

Instruction Manual

Adpro-Instruments Ltd.
Malta

General Safety /Warning Notes

Installation, maintenance and commissioning must be accomplished only by qualified technical personnel.

The product must be used only in the manner outlined in this instruction manual. In the case of inexpert handling or handling malpractice, the safety of the device cannot be guaranteed.

For terminal connection of the device, the local regulations or VDE 0100 (Regulations of German electrotechnical Engineers) must be observed.

Switch off the supply voltage before opening the device.

All field wirings must have insulation suitable for at least 250V AC. The temperature rating must be at least 90°C.


In the case of a defect, the distribution voltage must automatically be cut off by a RCCB protection switch so as to protect the user of the device from indirect contact with dangerous voltage.

A voltage-disconnecting switch must be provided near the device.



Materials of construction must be checked on their chemical compatibility.

Applications


Level Limit Switch for monitoring of bulk goods.
Applicable as full-, demand- and empty detector.

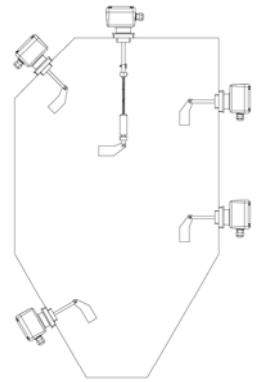


Technical data / Process specifications

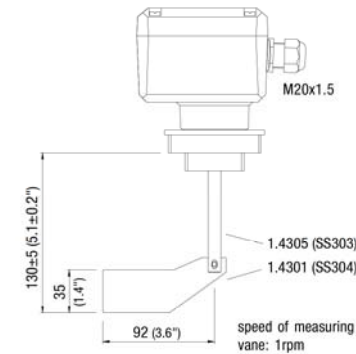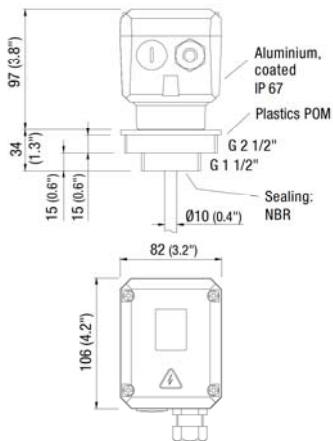


Dimensions in mm (inch)

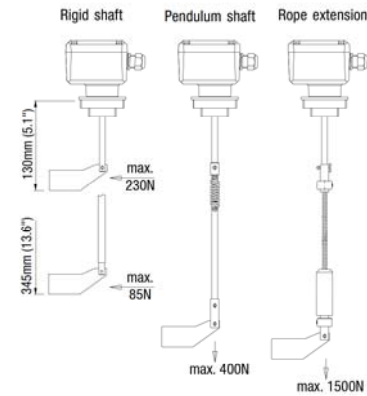

Version with extension only permitted as full detector.




Assembly



Note:
For assembly of shaft/rope extensions see separate instruction delivered with the extensions.


Installation

Mechanical load

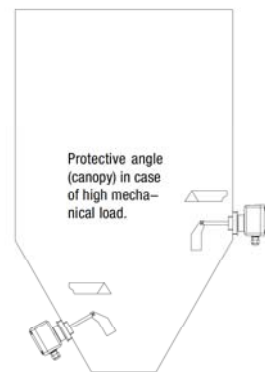

Version with extension only permitted as full detector.


Fixing / Sealing



Use suitable cable glands or conduit system. Not used entries have to be closed tight.

Adjustment


Adjustment of the spring force



1 light: light material
2 central: universal
3 strong: very sticky material

Electrical connection


AC version
Series ELS-R1



Supply voltage ±10% (including 10% from EN 61010), max. 4VA

(1) max. 250V AC, 2A, 500W
max. 300V DC, 2A, 60W
(2) fuse max. 10A, HBC, 250V, fast or slow

DC version
Series ELS-R2




Supply voltage ±10% (including 10% from EN 61010), max. 2,5W

(1) max. 250V AC, 2A, 500W
max. 300V DC, 2A, 60W
(2) fuse max. 10A, HBC, 250V, fast or slow

Switching logic / Maintenance

Switching logic



Maintenance
Normally not required

EC – Declaration of Conformity

Manufacturer Adpro-Instruments, Malta

Type Level Limit Sensor, Series ELS-R

2006/95/EC Low Voltage Directive

Applied standards for evaluation of the unit:
EN 61 010-1

2004/108/EC Electromagnetic compatibility

Applied standards for evaluation of the unit:
EN 61 326

We hereby confirm, that the above-mentioned unit corresponds with the essential safety targets, which are fixed in the above mentioned directives.

Information to the signer:

Name: Dipl. Ing. (FH) A. Haug, Technical Manager
Date: 02/2014
Unterschrift / Sign: A. Haug