

Product Description

LF-GLD045YE is a 45W isolated constant current LED driver. It has 0-10V/PWM/Rx dimming functions. The rated input voltage range is 200-264Vac. The output voltage range is 25-42Vdc. The output current has 5 options, including 850mA, 900mA, 950mA, 1000mA and 1050mA.

Features

- IP20
- Suitable for Class I light fixtures
- Isolated design
- EU standard & metal casing
- Flicker free
- Supports 0-10V/PWM/Rx dimming functions
- Conforms to CE certification
- 5 years warranty (please refer to the warranty condition.)




SELV CE

Applications

- Indoor office lighting
- Commercial lighting
- Residential lighting

Product Naming

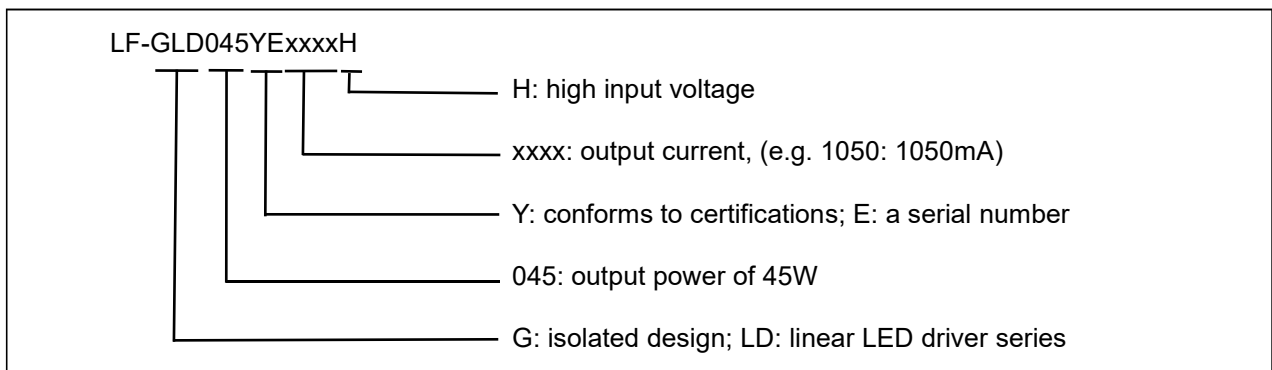


Electrical Characteristics

Model		LF-GLD045YExxxxH				
Output	Output Voltage	25-42Vdc				
	Output Current	850mA	900mA	950mA	1000mA	1050mA
	Percent Flicker	<0.5%				
	Ripple Current	<2%				
	Current Tolerance	±5%				
	Temperature Drift	±10%				
	Start-up Time	<0.5S				
Input	Input Voltage	220-240Vac (voltage limit: 200-264Vac)				
	Input Frequency	47Hz-63Hz				
	Input Current	0.3A Max				
	Power Factor	≥0.93			≥0.95	
	THD	≤20%				
	Efficiency	≥86%			≥87%	
	In-rush Current	≤58A@15uS@230Vac				
	Load Quantity of what a Circuit Breaker can support	Circuit Breaker Model	B10	C10	B16	C16
		Quantity (pcs)	23	38	39	64
	Leakage Current	<0.7mA				
Standby Power Consumption	≤0.5W					
Protection Characteristics	Open Circuit Protection	<55V				
	Short Circuit Protection	Hiccup mode (auto-recovery)				


Environment Descriptions	Working Temperature	-30°C~+50°C
	Working Humidity	20-90%RH (no condensation)
	Storage Temperature/ Humidity	-40°C~+ 80°C (six months under class I environment); 10-90%RH (no condensation)
	Atmospheric Pressure	86KPa~106KPa
Safety and Electromagnetic Compatibility	Certifications	Conforms to CE
	Withstanding Voltage	I/P-O/P: 3.75KV/5mA/60S
	Insulation Resistance	I/P-O/P: >100MΩ@500Vdc
	Safety Standard	EN61347-2-13: 2014/A1: 2017, EN61347-1: 2015, EN62493: 2015
	Electromagnetic Emission	EN55015, EN61000-3-2, EN61000-3-3
	Electromagnetic Immunity	EN61000-4-2, 3, 4, 5 (lightning strike L-N: 1KV, L/N-PG: 2KV)), 6, 11
Others	IP Rating	IP20
	RoHS	RoHS 2.0 (EU) 2015/863
	Warranty	5 yrs (TC≤88°C)
Remarks	<p>1. It is recommended that customer should install over voltage and under voltage protection devices and surge protection devices to ensure safety before connecting to electricity.</p> <p>2. As an accessory, the LED driver is not the only factor determining the EMC performance of the LED light fixture. The structure and the wiring of the light fixture are also relevant. Thus it's strongly recommended the LED light fixture manufacturer re-confirms the EMC of the whole LED light fixture.</p> <p>3. The test conditions of the circuit breaker configuration quantity is the same as that of the in-rush current test.</p> <p>4. Unless otherwise stated, the parameters of the power factor, harmonic and efficiency were test results under the ambient temperature of 25°C, humidity of 50%, input voltage of 230Vac and full load.</p>	

Product Characteristic Curves


PF Curve

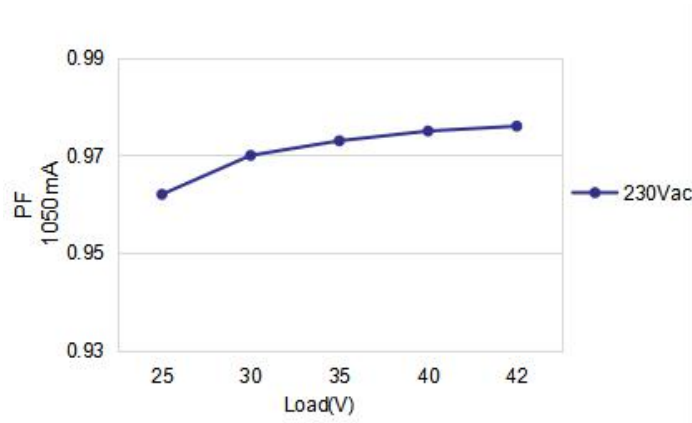

Efficiency Curve

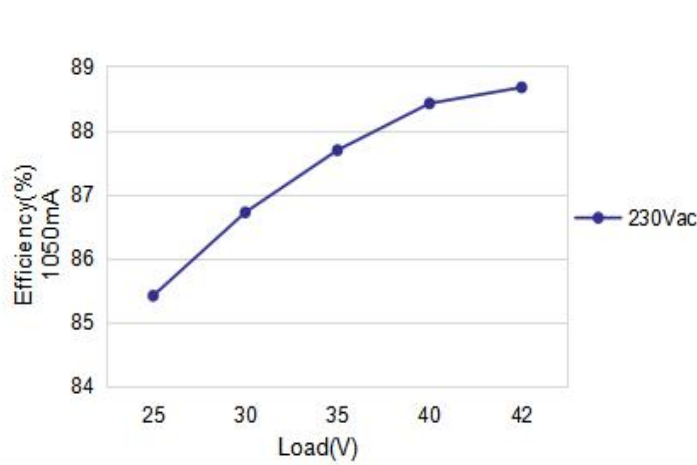

Lifetime Curve

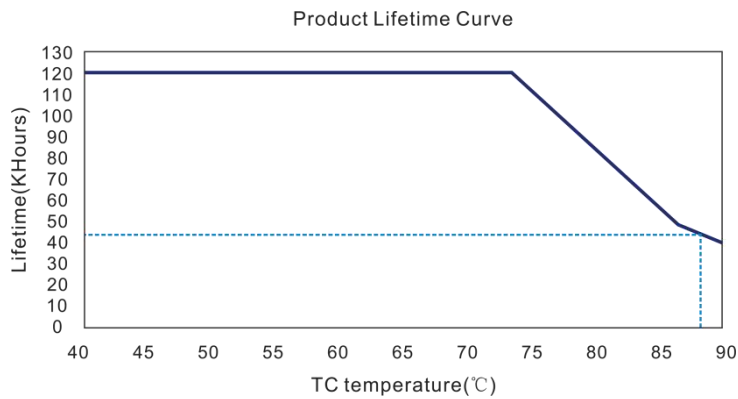

Dimming Operation Instructions

Definition of Driver's Terminals

INPUT




AC-L	AC live wire
AC-L	AC live wire
AC-N	AC neutral wire
AC-N	AC neutral wire
	Grounding wire

OUTPUT

LED+	the driver's positive electrode output
LED-	the driver's negative electrode output
DIM+	0-10V/PWM/RX dimming terminal
DIM-	

Dimming Operations of 0-10V/PWM/Rx Dimming


- Connect the 0-10V/PWM/Rx dimming signal to the DIM terminals
- In 0-10V dimming mode, the light is off when the the input voltage is less than 0.3V. It's on when the input voltage is more than 0.5V.
- The minimum dimming depth of 0.5-10V is 10%.
- The dimming depth of PWM dimming is 10%.
- The requirement of PWM compatible signal: 400-3000Hz; amplitude: 10(V)
- The dimming depth of Rx dimming is 10%.
- DIM+/- is vacant: 100% rated current

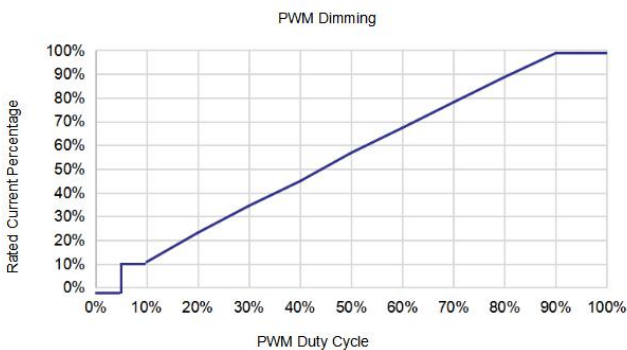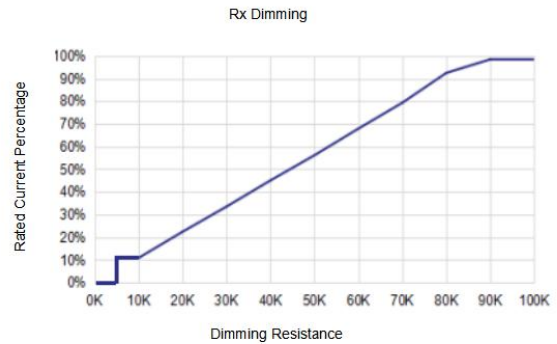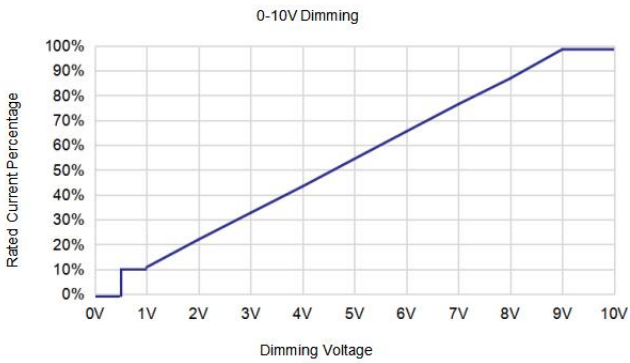

Label

INPUT <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>L</td></tr> <tr><td>L</td></tr> <tr><td>N</td></tr> <tr><td>N</td></tr> <tr><td>⊖</td></tr> </table> 0.75-1.5 □	L	L	N	N	⊖		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Un: 220-240V ~</td><td>In: 0.3A</td></tr> <tr><td>Fn: 50/60Hz</td><td>Irated:xxxxmA(CC)</td></tr> <tr><td>Output Voltage:25-42V ---</td><td>Prated: xxW</td></tr> <tr><td>Uout: 55V ---</td><td>tc: 90°C</td></tr> <tr><td>PF: 0.9C</td><td>ta: 50°C</td></tr> </table>	Un: 220-240V ~	In: 0.3A	Fn: 50/60Hz	Irated:xxxxmA(CC)	Output Voltage:25-42V ---	Prated: xxW	Uout: 55V ---	tc: 90°C	PF: 0.9C	ta: 50°C	LED Driver ● tc Model:LF-GLD045YExxxxH Control Mode:0-10V&Resistance&PWM For LED modules only	Preparation for input and output 	OUTPUT <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>LED+</td></tr> <tr><td>LED-</td></tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>DIM+</td></tr> <tr><td>DIM-</td></tr> </table> 0.5-1.0 □	LED+	LED-	DIM+	DIM-
L																								
L																								
N																								
N																								
⊖																								
Un: 220-240V ~	In: 0.3A																							
Fn: 50/60Hz	Irated:xxxxmA(CC)																							
Output Voltage:25-42V ---	Prated: xxW																							
Uout: 55V ---	tc: 90°C																							
PF: 0.9C	ta: 50°C																							
LED+																								
LED-																								
DIM+																								
DIM-																								
				www.lifud.com Made in China																				

Structure & Dimensions (Unit: mm)

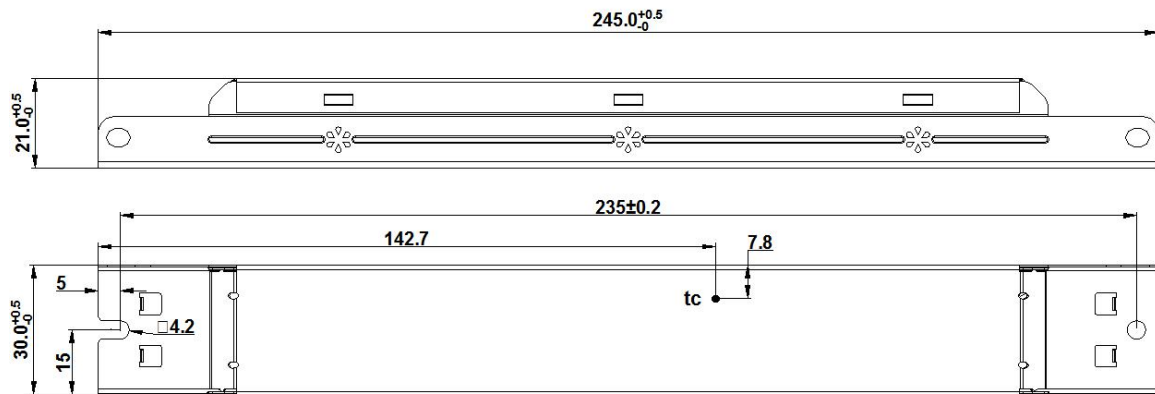

Package Specifications

Model	LF-GLD045YExxxxH
Box Size	385*285*210 mm (L*W*H)
Quantity	8 pcs/layer; 6 layers/ctn; 48 pcs/ctn
Weight	0.201 kg/pc; 9.87 kg/ctn

Transportation & Storage

■ Transportation

- Suitable transportation means: vehicles, boats and aircraft.
- During transportation, there should be awnings for rain protection and sun protection. Civilized loading and unloading are required. There should be no severe vibration or impact.

■ Storage

- Storage in accordance with the provisions of the Class I environment. For products which have been stored for more than six months, they mustn't be used until they pass the re-inspection.

Attention

- Please use this product according to its specifications otherwise there may be malfunction.
- Use light fixtures that have not been certified or are not compatible with the LED drivers may cause fire or other hazards.
- Man-made damage, any use beyond the specification and non-original-factory modification are not covered by warranty.

Remark: The final interpretation right of the contents of this data sheet belongs to Lifud Technology Co., Ltd.