

Hand Control JCH35A15



Data sheet

Hand Control JCH35A15

- JCH35A15 is a newly designed handset, which can drive up several actuators simultaneously; Brand-new matching colors and shape, bringing new visual impact. With a mechanical locking function, JCH35A15 can avoid misoperation from the patient. The handset has a maximum IPX6 protection grade, making the cleaning more efficient and offering an excellent operating experience for a variety of scenarios.




Features

- IP Grade: Max IPX6
- Number of button: Maximum 10 buttons
- Button Type: Touch switch
- Drive up to 5 actuators simultaneously
- Color: Gray
- Supporting control box: All standard control boxes of JIECANG
- Panel and color design can be customized according to specific requirements
- Special function: mechanical lock of 4 block

Usage

- Operating temperature: +5°C to +40°C
- Reserve Temperature: -10°C to +50°C
- Relative humidity: 20% to 80% (non-condensing)
- Altitude: up to 2000m
- Approvals: RoHS

Dimensions

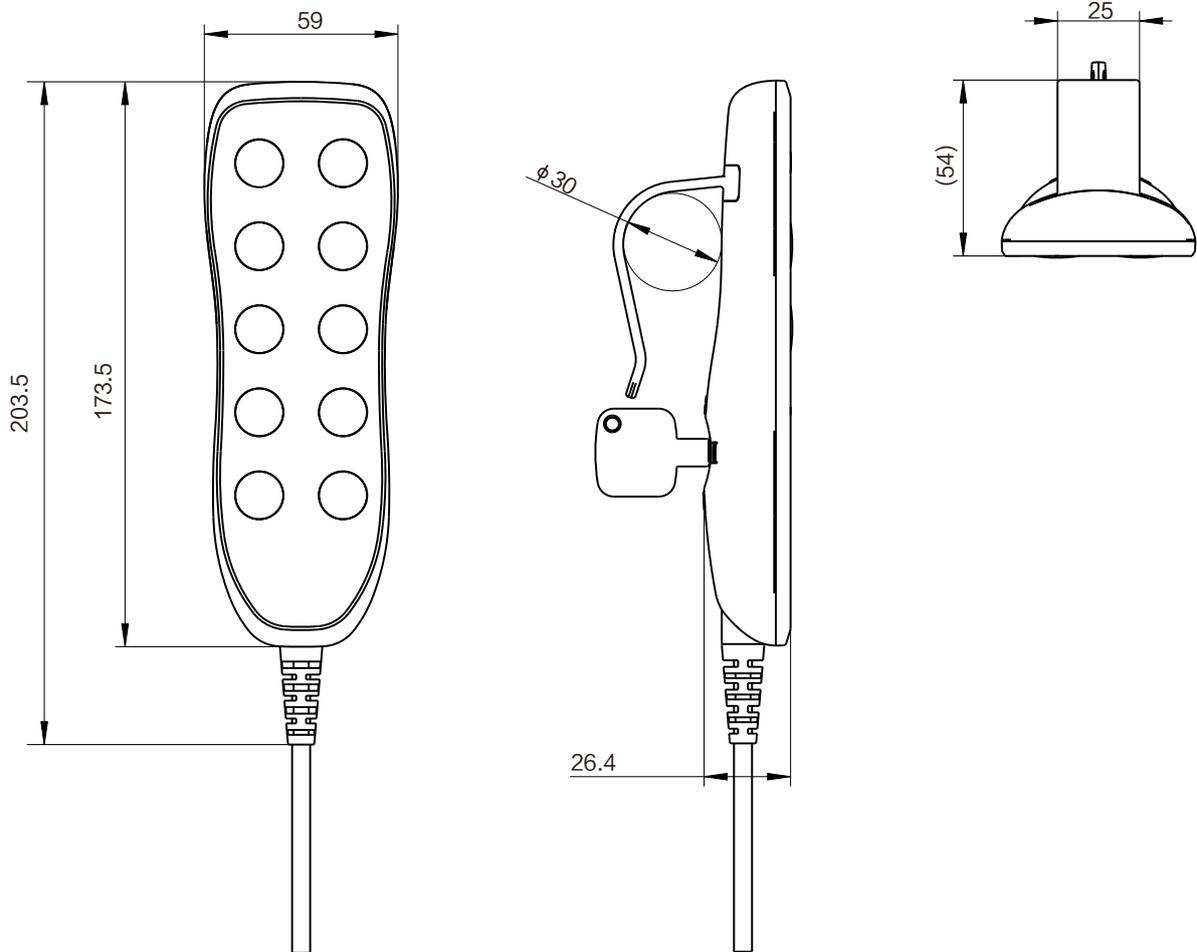

Standard definition of JIECANG mechanical lock

| All locked | I | II | All unlocked |
|--------------------------------------|---|---|------------------------------------|
| All button functions are unavailable | The 1st, 2nd and 3rd row button functions are available The 4th and 5th row button functions are unavailable | The 1st, 2nd and 3rd row button functions are unavailable The 4th and 5th row button functions are available | All button functions are available |


Attention:

- (1) The definition of the mechanical locking is not showed in the ordering while in specifications, please explain clearly your requirement to the salesman before placing the order
- (2) The prompt of the lock: to judge according to the lighting on/off of back light

Ordering Key


| | | |
|-------------------|----------|--|
| Model | JCH35A15 | JCH35A15 series handsets |
| Backlight | X | A=with backlight B=without backlight |
| Button row number | X | 1 ~ 5 |
| Color | X | G=Gray B=Black |
| Panel code | XXX | 5G1=JCH35A6-5G1(See JCH35A15 standard panel) |
| Plug and Cable | XXX | 8L1=8pin DIN plug of spring cable 13L1=13pin DIN plug of spring cable 10P1=10pin crystal elbow flex plug of spring cable |
| Cable length | XXX | 4D0=4.0M |
| Linkage way | X | 0=single action L=linkage action |

Naming regulation

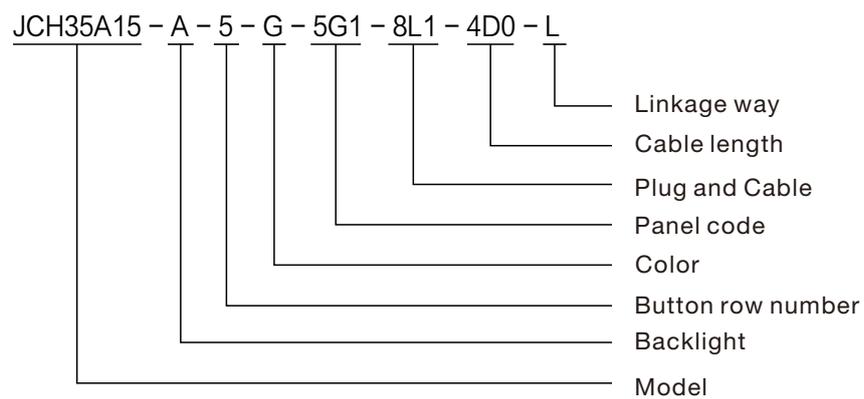

JCH35A15 standard pane


Please check if the function you need is matching with the panel function before placing an order

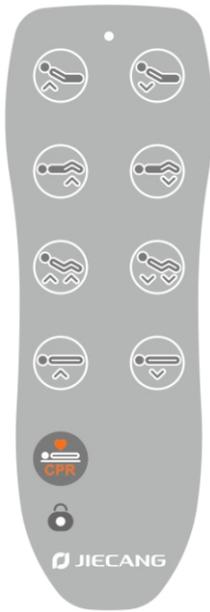

JCH35A15-5G9




JCH35A15-5G10

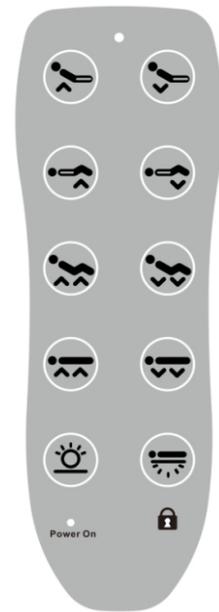


JCH35A15-5G6

Plug


8pin DIN plug: straight cable 8D1; spring cable: 8L1(matching with JIECANG control boxes of DIN plug)

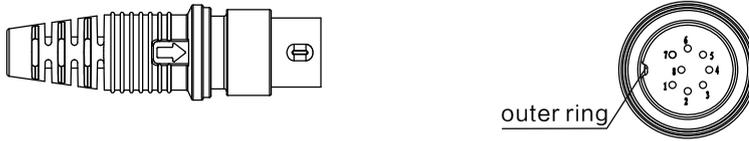

13pin DIN plug: straight cable 13D1; spring cable: 13L1(matching with JIECANG control boxes of DIN plug)

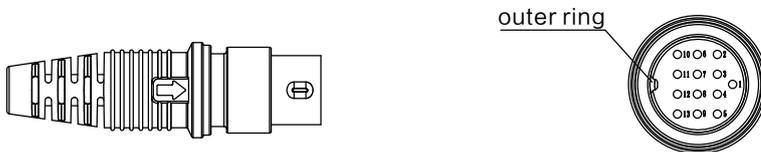

10pin crystal elbow flex plug: straight cable:10H1; Spring cable: 10P1 (matching with JIECANG control boxes JCB35T2, JCB35T3, JCB35T6 of flex plug)

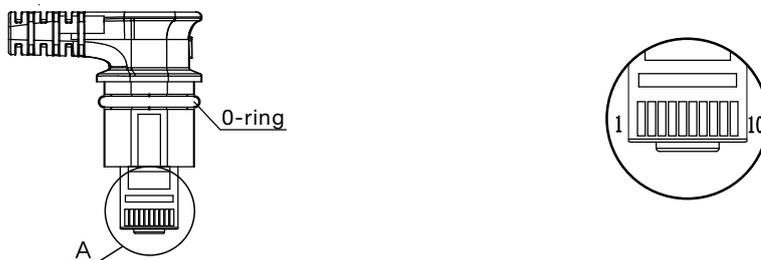

Attention: The model of supporting control box and the plug will be different according to the number of supporting actuators, Please contact the salesman in the corresponding area of JIECANG for confirmation before placing an order.

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG's product are constantly improving, it is possible to make changes to JIECANG's product without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.