

Hand Control JCH35A6



TECHNOLOGY
DRIVES INTELLIGENT LIFE

Data sheet

Hand Control JCH35A6

- The hand feels of JCH35A6 is comfortable ergonomic, and the protection level can be up to IPX6, making cleaning easier.

The hand control box can be equipped with an electronic lock function, which has a higher security level.

The hand control box is suitable for all Jiecang conventional control boxes.

It can be matched with Jiecang BUS system and is suitable for various medical care products, such as medical bed, patient lift, examination and treatment bed, etc.



Features


- IP grade:Max IPX6
- Button amount: Max.12 buttons
- Key form: touch switch
- Drive up to 6 actuators at the same time
- Colour: Gray/Black
- Control box supporting: all conventional control boxes of Jiecang
- Optional function: electronic lock
- Panel color and style can be customized

Usage


- Operating temperature: +5°C to +40°C
- Storage temperature: -10°C to +50°C
- Relative humidity: 20% to 80%(non-condensing)
- Atmospheric pressure: 860 to 1060 hPa
- Altitude: Max. 2000m
- Certificate: ROHS

Dimensions

With Electronic locks

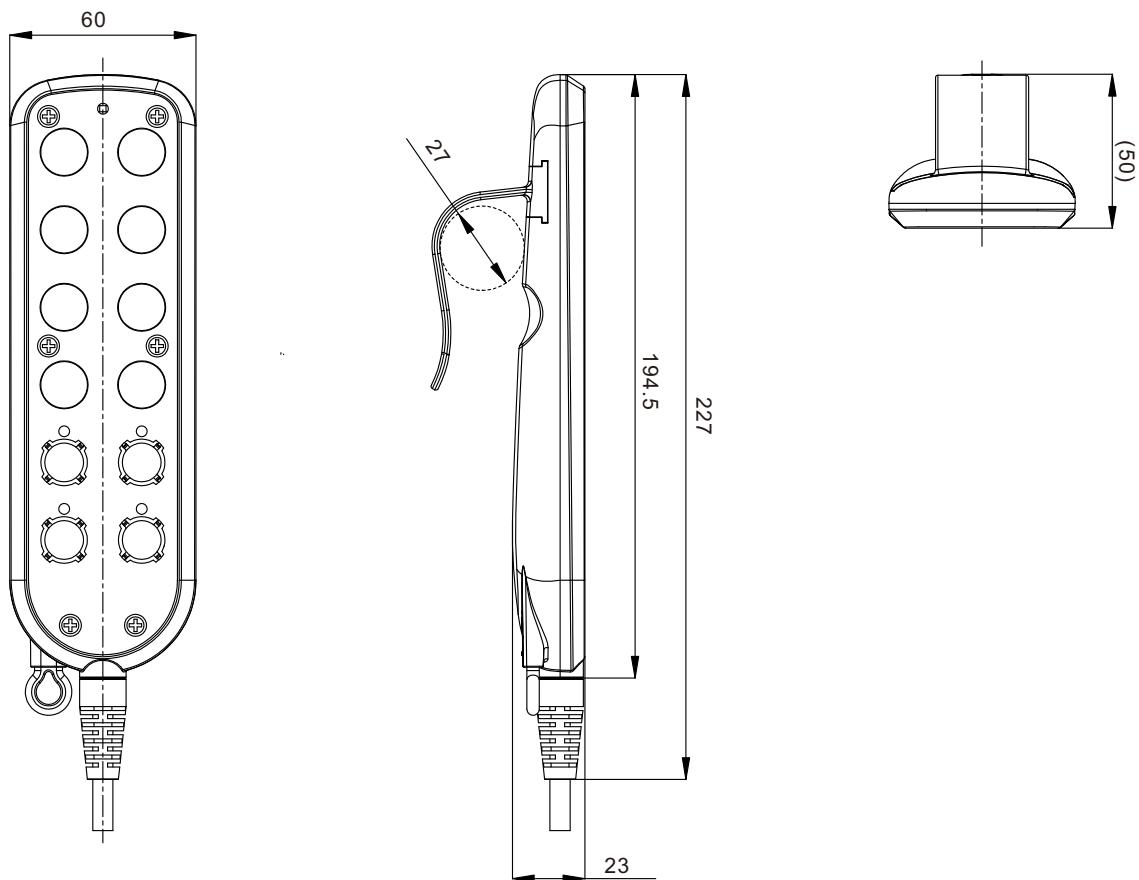


Without Electronic locks

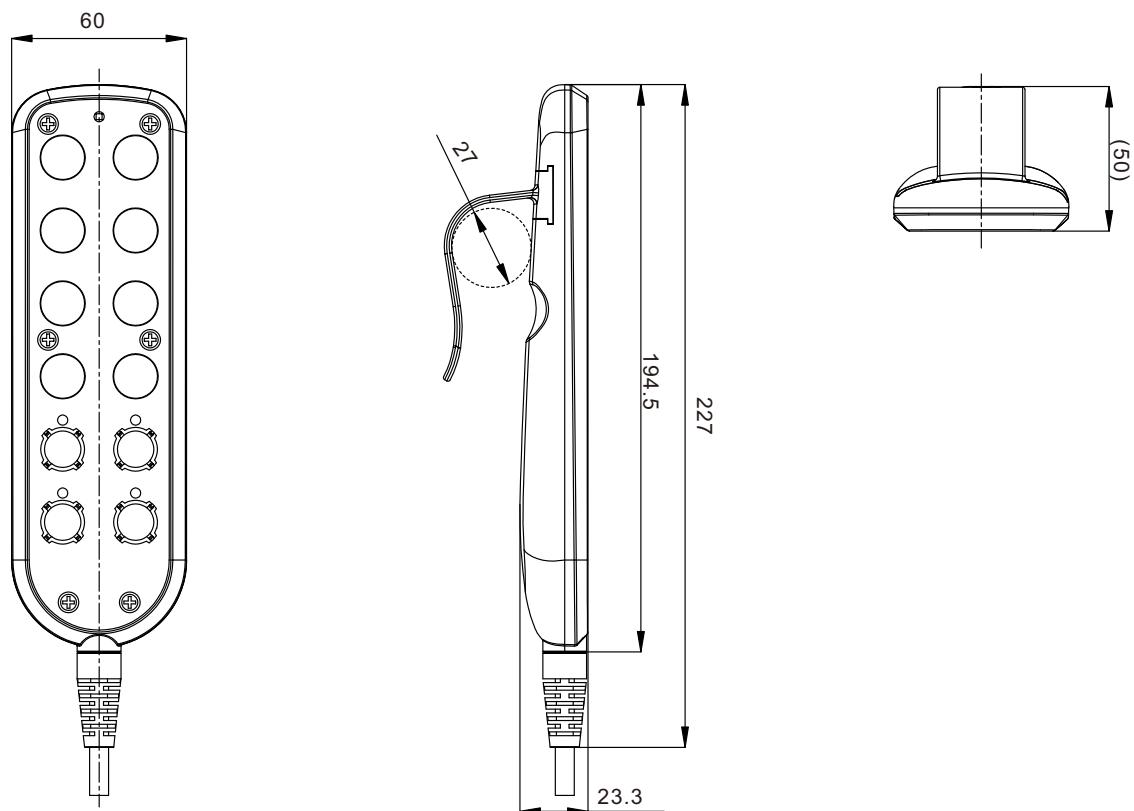


Ordering Key

Model	JCH35A6	JCH35A6 series handsets
Backlight	X	A=with backlight B=without backlight
Row of buttons	X	1~6
Color	X	G=Gray B=Black
Panel code	XXX	5G1=JCH35A6-5G1(See JCH35A6 standard panel)
Cable plug code	XXX	8L1=8pin DIN plug of spring cable 13L1=13L1=13pin DIN plug of spring cable 10P1=10pin crystal elbow flex plug of spring cable
Cable length	XXX	4D0=4.0M
Linkage	X	0=single action L=linkage action

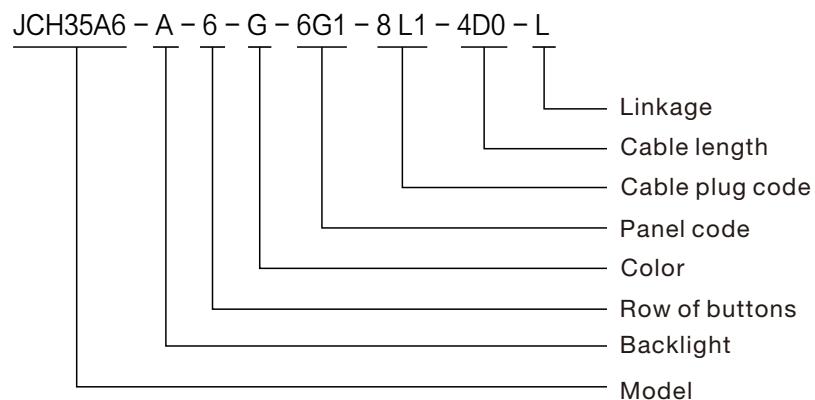Naming regulation

JCH35A6 standard panel


When ordering, please check whether the manual control function corresponds to the symbol on the panel

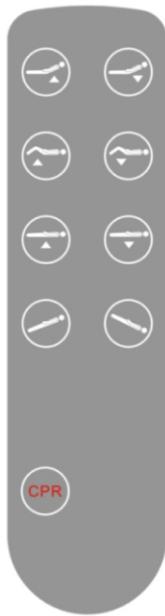

JCH35A6-5G6




JCH35A6-5G1

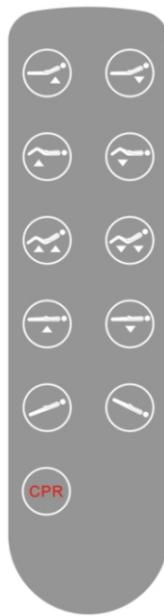

JCH35A6-6G1



JCH35A6-6G2

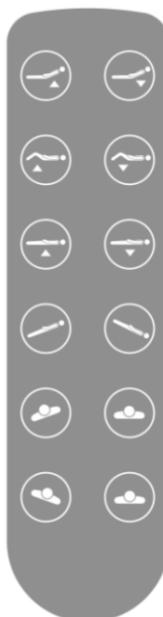

JCH35A6-6G7



JCH35A6-6G16



JCH35A6-6G21



JCH35A6-5G17



JCH35A6-5G19




JCH35A6-6G27




JCH35A6-5G28

Plug


8pin DIN plug: straight cable 8D1; spring cable: 8L1(matching with JIECANG control boxes of DIN plug)

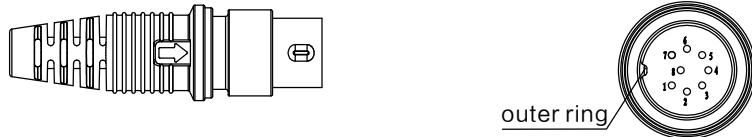

13pin DIN plug: straight cable 13D1; spring cable: 13L1(matching with JIECANG control boxes of DIN plug)

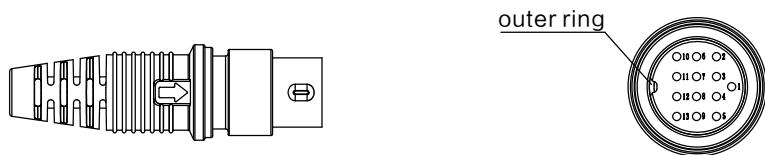

10pin crystal elbow flex plug: straight cable:10H1; Spring cable: 10P1 (matching with JIECANG control boxes JCB35T2, JCB35T3, JCB35T6 of flex plug)

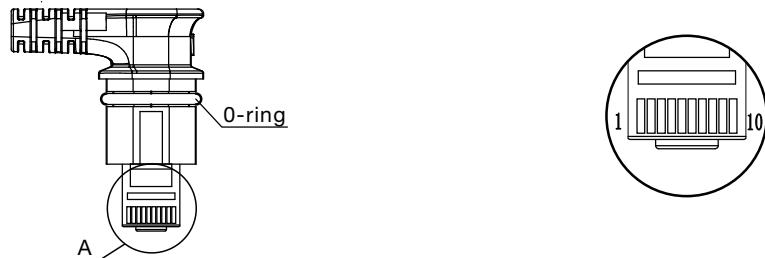

Attention: The model of supporting control box and the plug will be different according to the number of supporting actuators, Please contact the salesman in the corresponding area of JIECANG for confirmation before placing an order.

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG's products are constantly improving, it is possible to make changes to JIECANG's products without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.