

Hand Control JCH35A8



Data sheet

Hand Control JCH35A8

- The JCH35A8 is a hand control box suitable for multi-function operation. The hand control box is designed with 29 buttons totally, which can meet most functional requirements. Optional electronic lock function can be used to lock different functions, making it safer to use.
- The hand control box provides IPX6 protection level, which is suitable for all Jiecang control boxes.



Features


- IP grade: Max IPX6
- Button amount: Max.29 buttons
- Key form: touch switch
- Drive up to 10 actuators at the same time
- Colour: Black
- control box supporting: all conventional control boxes of Jiecang
- Optional function: electronic lock
- Optional accessories: bracket
- Optional hook: metal hook / plastic hook
- Panel color and style can be customized

Usage


- Operating temperature: +5°C to +40°C
- Storage temperature: -10°C to +50°C
- Relative humidity: 20% to 80%(non-condensing)
- Atmospheric pressure: 860 to 1060 hPa
- Altitude: Max. 2000m
- Certificate: ROHS

Dimensions

Plastic hook

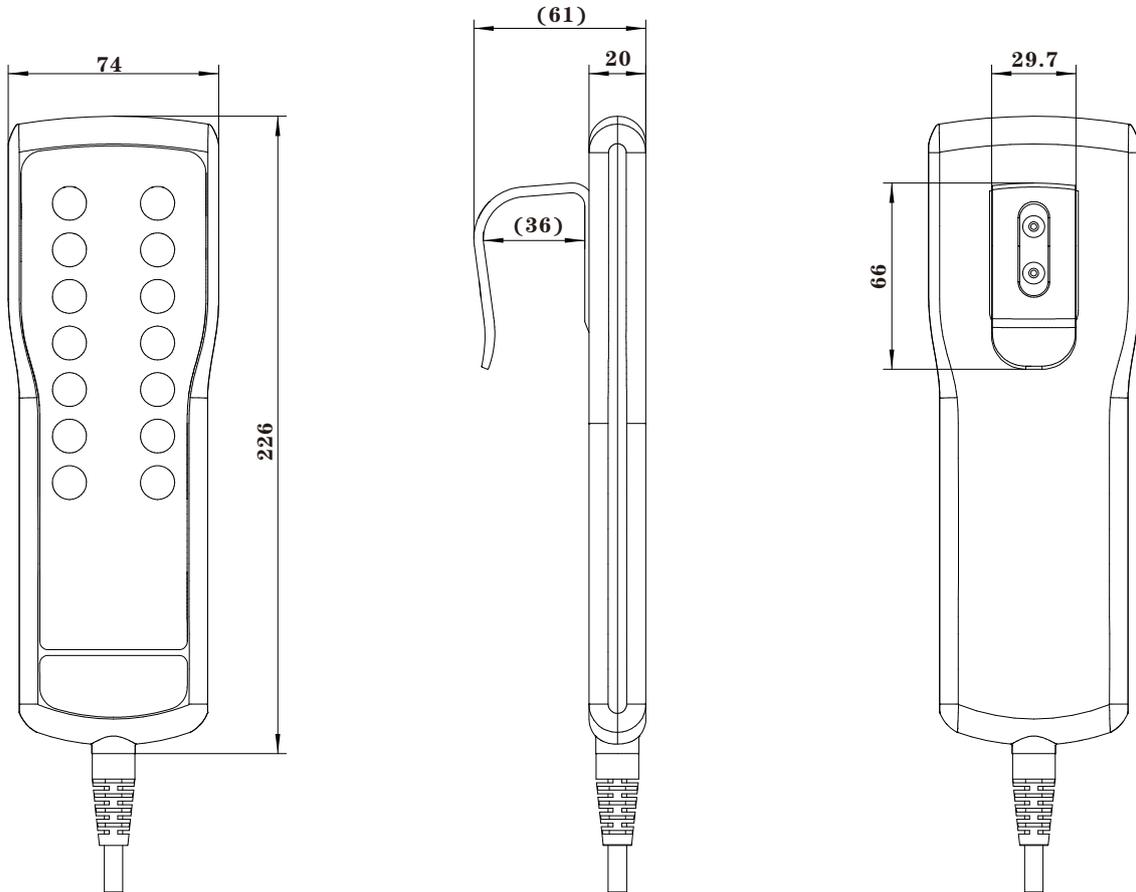


Metal hook

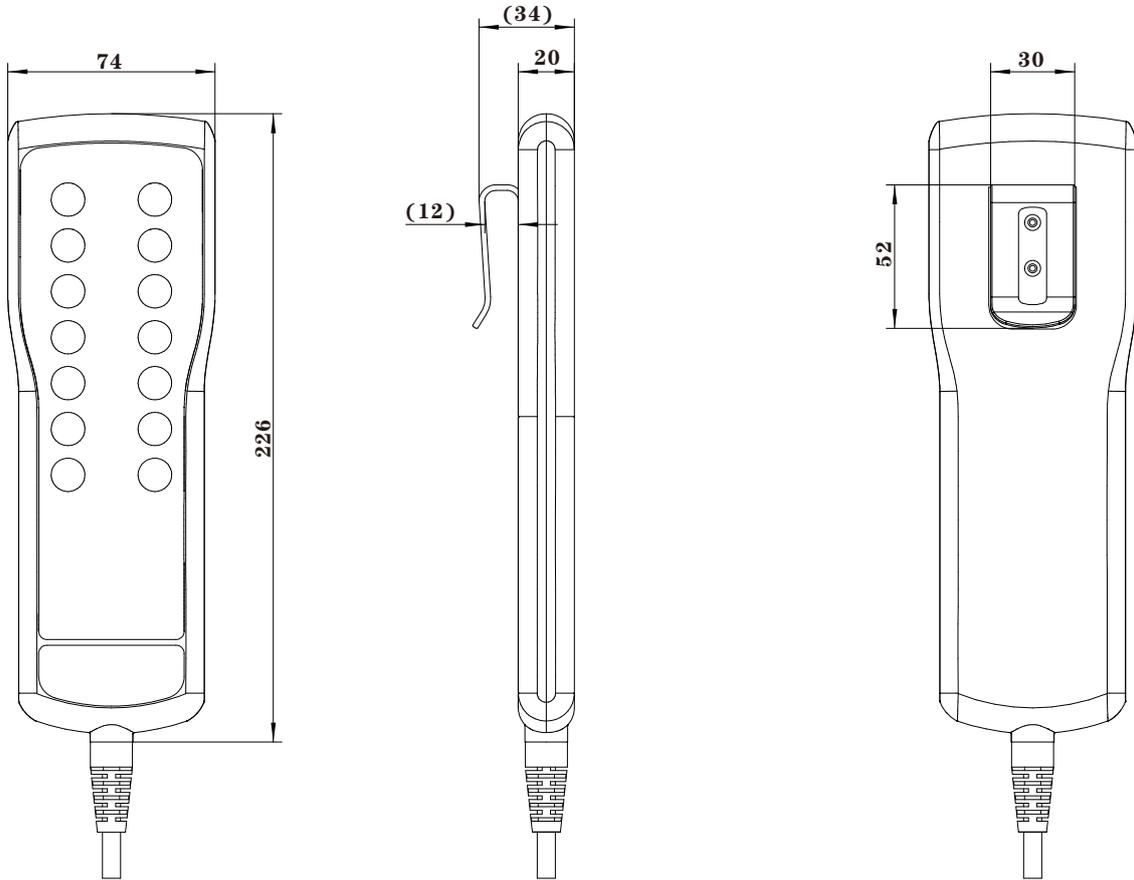

Ordering Key

Model	JCH35A8	JCH35A8 series handsets
Backlight	X	A=with backlight B=without backlight
Row of buttons	X	1 ~ 10
Color	X	G=Gray B=Black
Panel code	XXX	8B5=JCH35A8-8B5 (See JCH35A8 standard panel)
Cable plug code	XXX	8L1=8pin DIN plug of spring cable 13L1=13pin DIN plug of spring cable 10P1=10pin crystal elbow flex plug of spring cable
Cable length	XXX	4D0=4.0M
Linkage	X	0=single action L=linkage action


Naming regulation

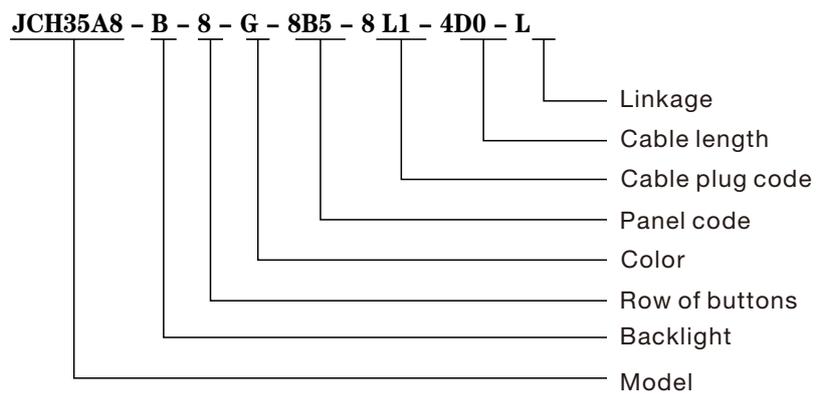


Standard panel of JCH35A8

When ordering, please check whether the manual control function corresponds to the symbol on the panel. The pattern or LOGO can be customized on the small panel at the bottom, such as


JIECANG

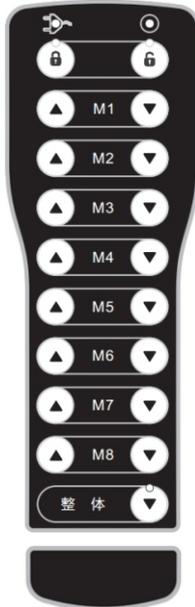


JCH35A8-10B2

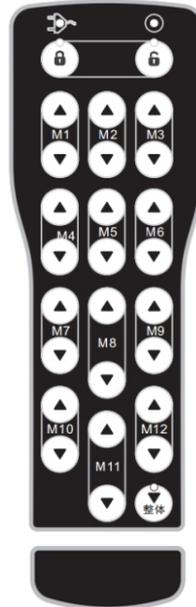

JCH35A8-12B1

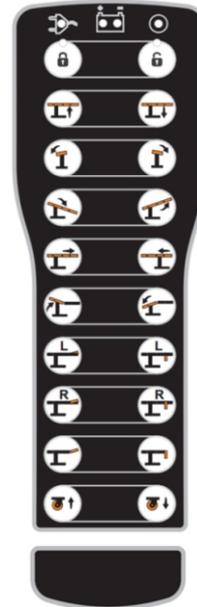

JCH35A8-10B4

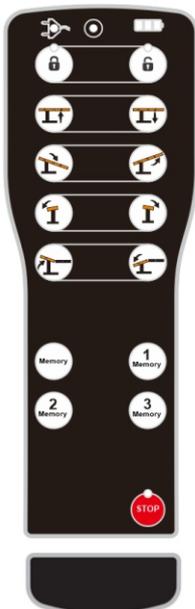


JCH35A8-8B5




JCH35A8-10B3

Plug


8pin DIN plug: straight cable 8D1; spring cable: 8L1(matching with JIECANG control boxes of DIN plug)

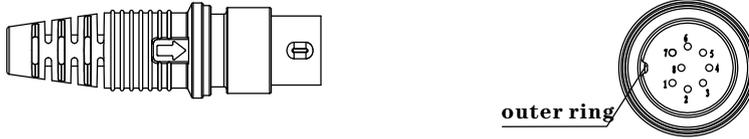

13pin DIN plug: straight cable 13D1; spring cable: 13L1(matching with JIECANG control boxes of DIN plug)

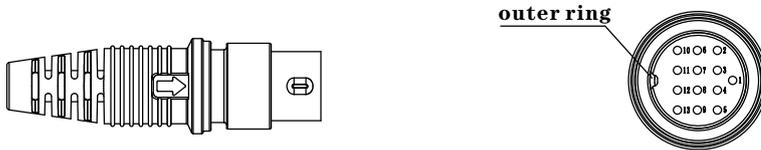

10pin crystal elbow flex plug: straight cable:10H1; Spring cable: 10P1 (matching with JIECANG control boxes JCB35T2, JCB35T3, JCB35T6 of flex plug)

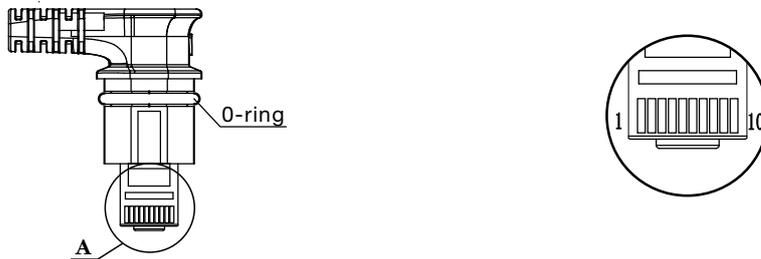

Attention: The model of supporting control box and the plug will be different according to the number of supporting actuators, Please contact the salesman in the corresponding area of JIECANG for confirmation before placing an order.

Disclaimer and Exclusion of Liability

The user must determine the suitability of JIECANG products under specific conditions. JIECANG is committed to providing the latest product information. However, as JIECANG's product are constantly improving, it is possible to make changes to JIECANG's product without prior notice. Therefore, JIECANG cannot guarantee the correctness and authenticity of the product information. Although JIECANG will do its best to meet the order requirements, due to the above reasons, JIECANG cannot guarantee the delivery capacity of any specific product.

Therefore, JIECANG reserves the right to stop selling any products listed on the website or product catalog or other JIECANG written materials. All sales activities must be carried out in accordance with the requirements of JIECANG sales and Delivery Standard Clauses. For copies of relevant documents, please contact JIECANG.