



SIDE 横向10:1

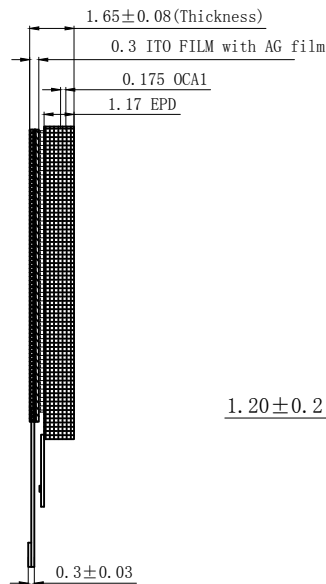

BACK 1:1

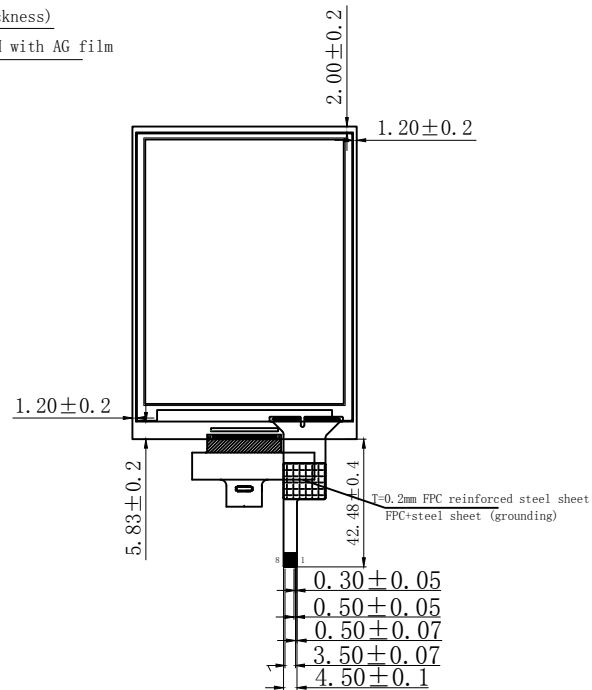

Notes:

1. Structure:F+F
2. Channels: 12*16 IC: FT5436
3. Power Supply: 2.8V-3.6 V
4. Transmittance: ≥83%
5. Surface hardness: ≥2H
6. Working Temp&Humidity: 0°C~+45°C, ≤90%RH
7. Storage Temp&Humidity: 20°C~+24°C, 40%RH~70%RH
8. Tolerances unless otherwise specification ±0.2mm

TP Pin define	
1	GND
2	VDD
3	RST
4	INT
5	SDA
6	SCL
7	NC
8	NC

DALIAN GOOD DISPLAY CO., LTD		
DRAWN BY: Ande	PRODUCT MODEL:	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2018-12-25	UNITS: mm
Standard tolerance:	WEBSITE: www.good-display.com	SCALE: 1:1