


文件编号:

前视图 Front View 1:1

侧视图 Side View 横向10:1

后视图 Back View 1:1

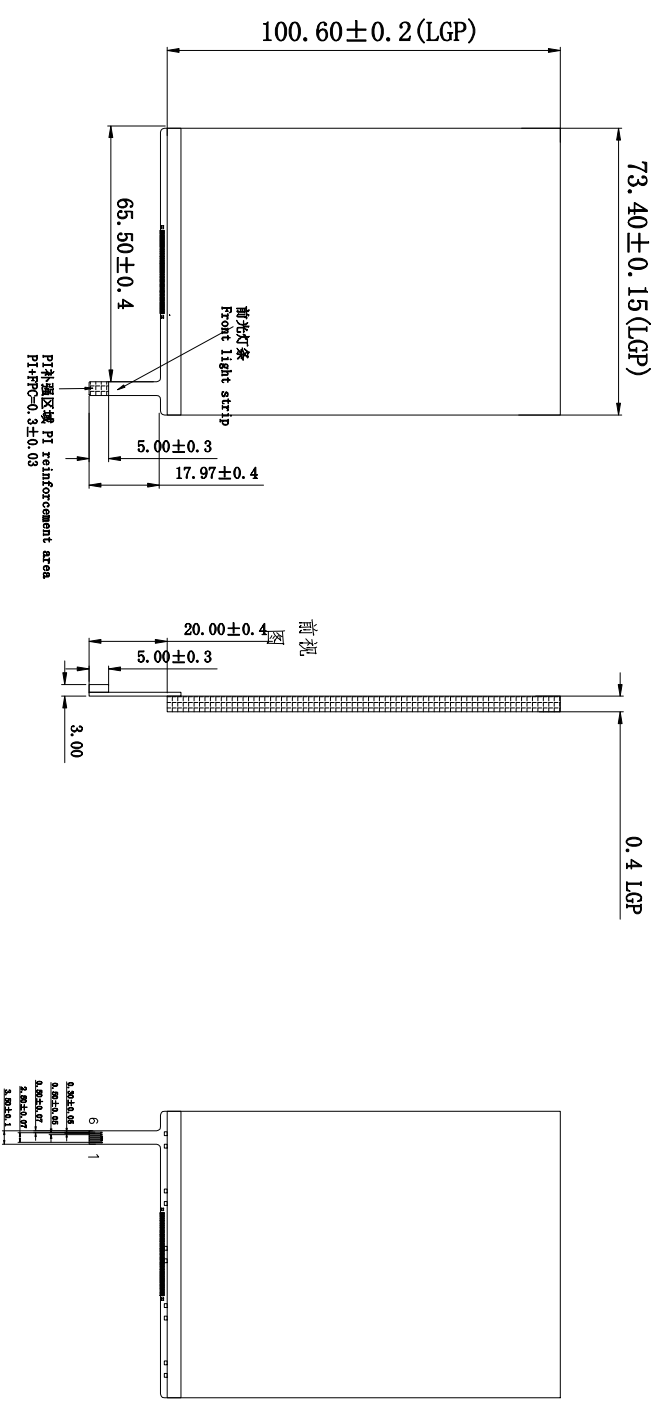

技术参数 Technical Parameters:

- 前置光源串联5LED, 电流≤15mA, 推荐8mA;恒流升压, 电压理论≤15V
Front light series connection 5LED, Current≤15mA, Recommended 8mA;Constant flow voltage rise, voltage theoretically≤15V
- 透光率 Transmittance: ≥83%
- 表面硬度 Surface Hardness: ≥2H
- 工作环境 Working Environment: 0℃~+45℃, ≤90%RH
- 储存环境 Storage Environment: 20℃~+24℃, 40%RH~70%RH
- 未注尺寸公差按 Unmarked size tolerance is ±0.2mm

| FL Pin define | |
|---------------|------|
| 1 | LED+ |
| 2 | LED+ |
| 3 | NC |
| 4 | NC |
| 5 | LED- |
| 6 | LED- |

客户确认签字:

| | | | | | | | |
|----------------|--|--|--|---|--|--|--|
| DRAWN BY: Anle | | | | PRODUCT MODEL: DALIAN GOOD DISPLAY CO., LTD | | | |
| CHECKED BY: | | | | CUSTOMER ID: | | | |
| APPROVED BY: | | | | DATE: 2020-09-22 | | | |
| 批 准: | | | | 网 址: www.good-display.com | | | |
| 公 差: | | | | UNITS: mm | | | |
| | | | | SCALE: 1:1 | | | |
| | | | | VIEW: 投影方式: 第三角投影法 | | | |

| 版本 | 修改记录 | 记录人 | 日期 |
|------|-------|------|------------|
| V1.0 | 初版发行。 | Anle | 2020-09-22 |