



FRONT VIEW: 1:1



SIDE VIEW: 横向 1:1

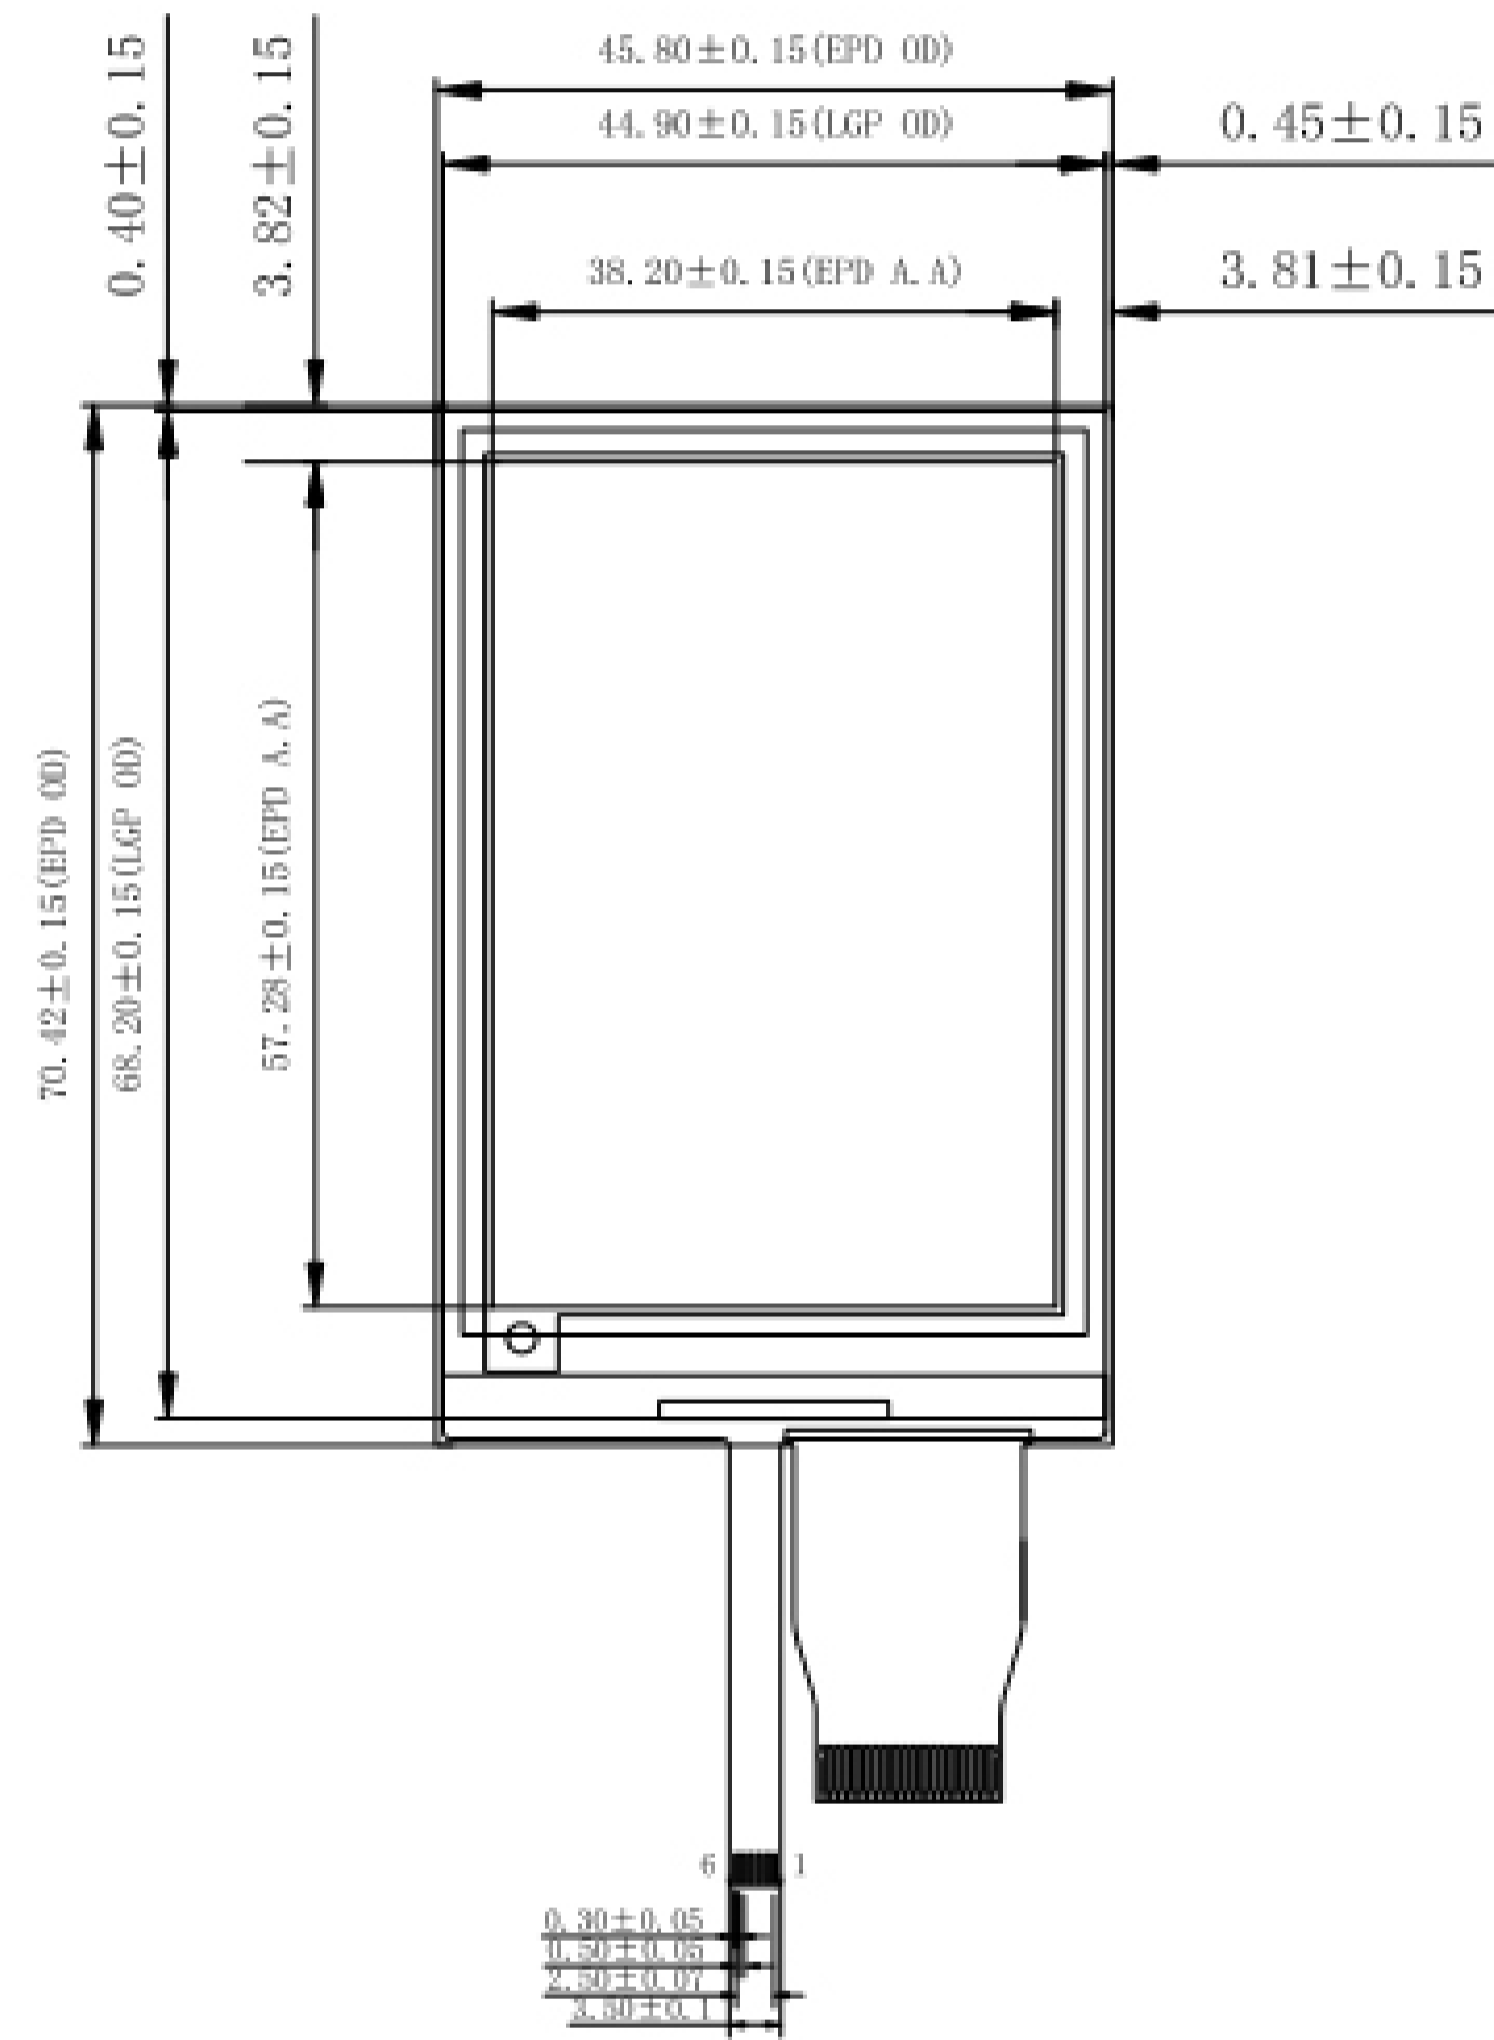


BACK VIEW: 1:1

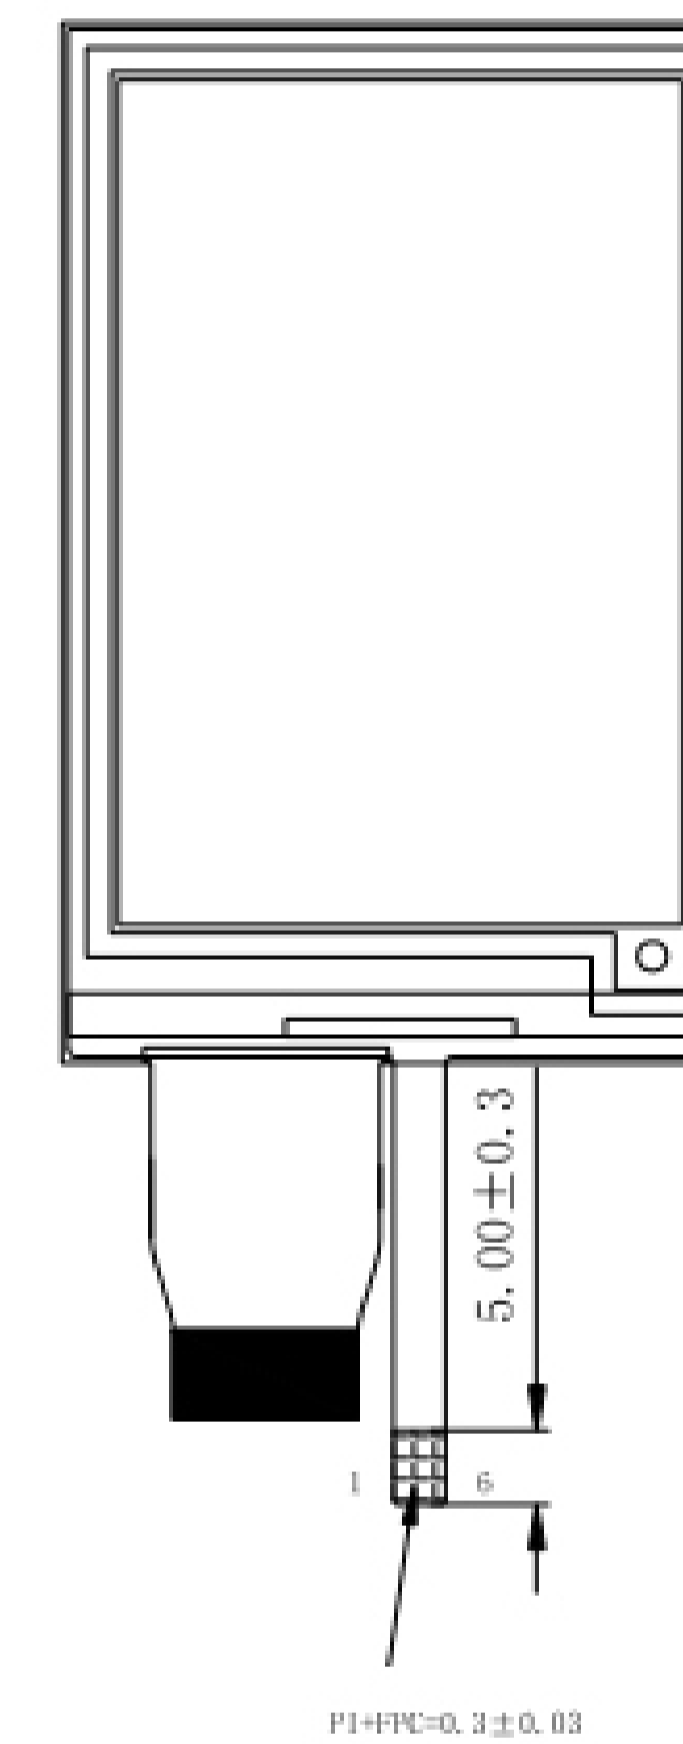

TECHNICAL PARAMETER:

1. Full bonding process
2. Front light 4pcs LED lights in series, voltage $\leq 12\text{V}$, current $\leq 15\text{mA}$
3. Surface hardness: $\geq 6\text{H}$
4. Working environment: $0^\circ\text{C} \sim +45^\circ\text{C}$, $\leq 90\% \text{RH}$
5. Storage environment: $20^\circ\text{C} \sim +24^\circ\text{C}$, $\leq 40\% \text{RH} \sim 70\% \text{RH}$
6. Unmarked size tolerance is $\pm 0.2\text{mm}$

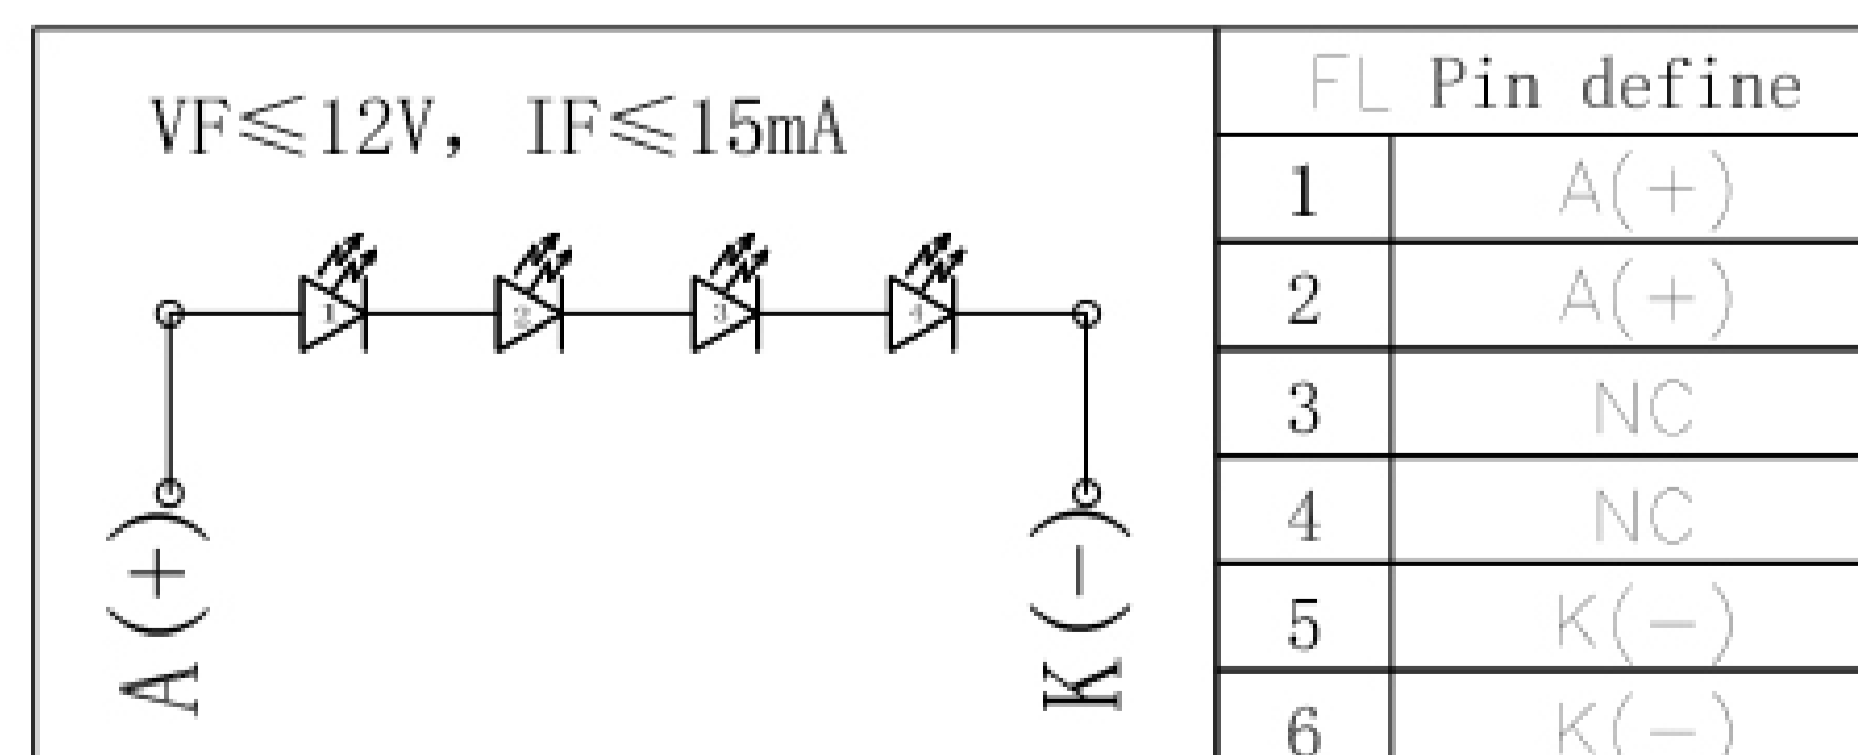

DALIAN GOOD DISPLAY CO., LTD

DRAWN BY: Ande	PRODUCT MODEL: GDEW027W3-FL02	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2020-09-18	UNITS: mm
Standard tolerance:	WEBSITE: www.good-display.com	SCALE: 1:1