




Front 1:1

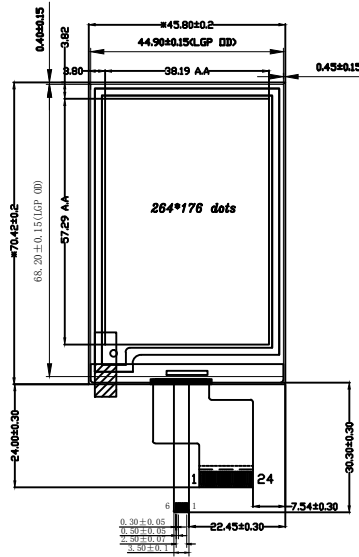

Side 1:1

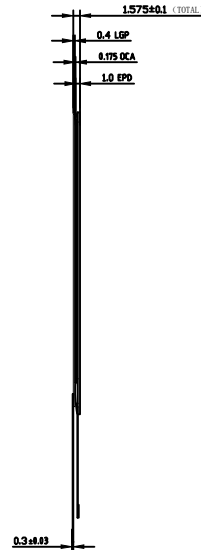


Back 1:1

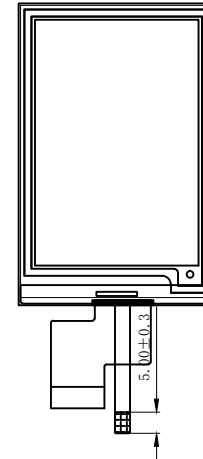

Technical Parameter:

1. Full bonding process
2. Number of front lights: 4 lights in series
3. Front light Voltage: $\leq 12V$
4. Surface hardness: $L \geq 6H$
5. Operating Environment: $0^{\circ}C \sim +50^{\circ}C$, 40%RH \sim 70%RH
6. Storage Environment: $-25^{\circ}C \sim +70^{\circ}C$, 40%RH \sim 70%RH
7. Unmarked Dimensional Tolerances: $\pm 0.2mm$

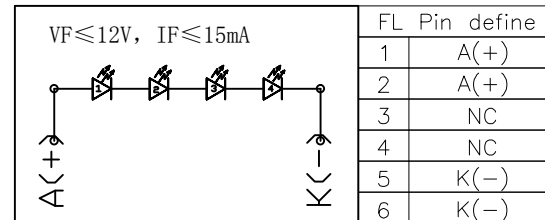

大连佳显电子有限公司
DALIAN GOOD DISPLAY CO., LTD

DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GDEY027T91-FL02	VIEW:
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	投影方式: 第三角投影法
APPROVED BY: 批准:	DATE: 日期: 2023-06-29	UNITS: 单位: mm
Standard tolerance: 公差:	WEBSITE: 网址: www.good-display.com	SCALE: 比例: 1:1