
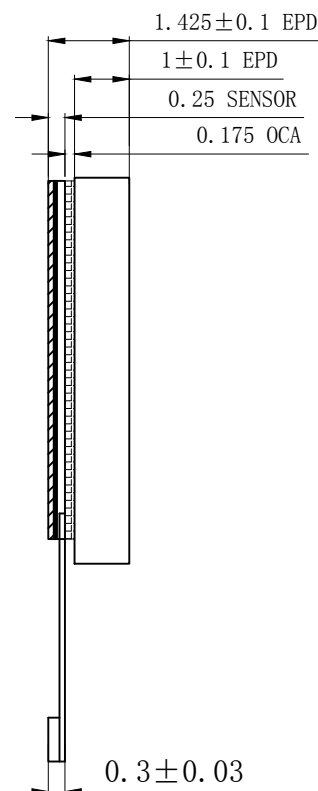


# Front 1:1

# Side Horizontal 10:1

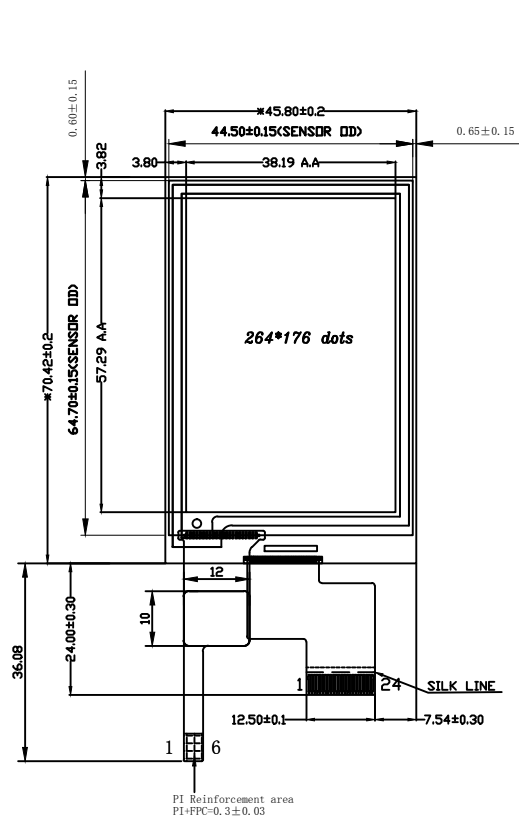

TP Pin define	
1	GND
2	INT
3	RST
4	VDD
5	SCL
6	SDA

### Technical Parameter:

1. Full bonding process
2. Touch IC: FT6336
3. Touch Voltage: 2.8-3.6V
4. Surface hardness:  $L \geq 6H$
5. Operating Environment:  $0^{\circ}\text{C} \sim +50^{\circ}\text{C}$ , 40%RH~70%RH
6. Storage Environment:  $-25^{\circ}\text{C} \sim +70^{\circ}\text{C}$ , 40%RH~70%RH
7. Unmarked Dimensional Tolerances:  $\pm 0.2\text{mm}$

## DALIAN GOOD DISPLAY CO., LTD

DRAWN BY: 绘图:	PRODUCT MODEL: 产品型号: GDEY027T91-T01	VIEW:  投影方式: 第三角投影法
CHECKED BY: 审核:	CUSTOMER ID: 客户编号:	
APPROVED BY: 批准:	DATE: 日期: 20230720	UNITS 单位: mm
Standard tolerance: 公差:	网 址: <a href="http://www.good-display.com">www.good-display.com</a>	SCALE 比例: 1:1