
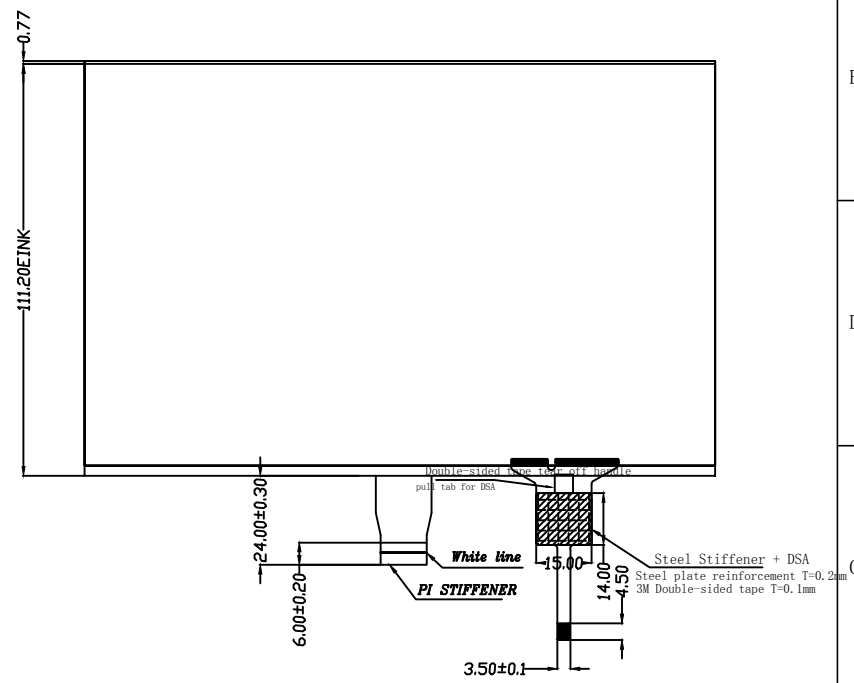
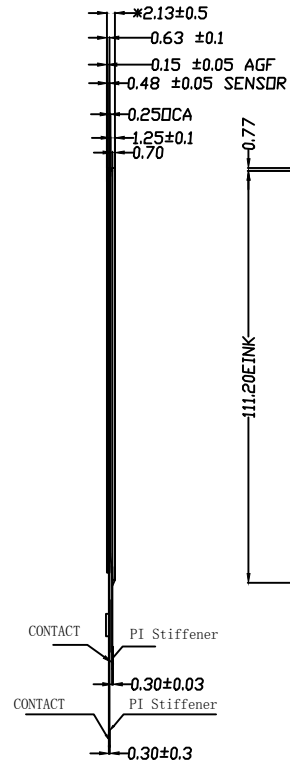


# Front 1:1

# Side 1:1

# Back 1:1

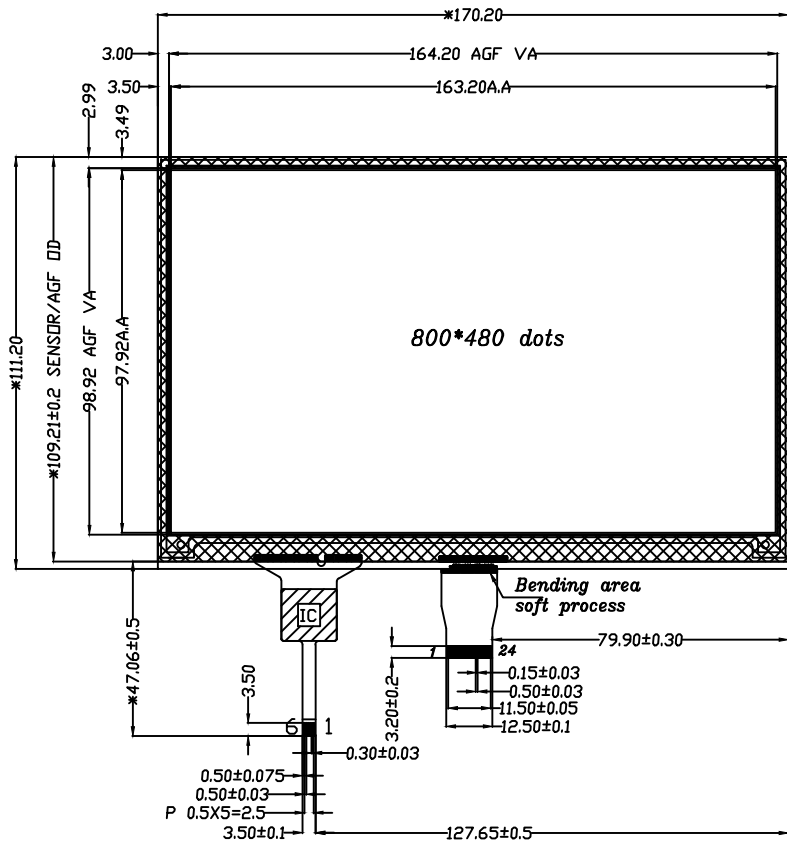

TP Pin define	
1	GND
2	VDD
3	RST
4	INT
5	SDA
6	SCL

- Technical Parameter:
1. Full bonding process
  2. Touch IC: GT911
  3. Touch Voltage: 2.8-3.6V
  4. Surface hardness:  $L \geq 6H$
  5. Operating Environment:  $0^{\circ}C \sim +50^{\circ}C$ , 40%RH~70%RH
  6. Storage Environment:  $-25^{\circ}C \sim +70^{\circ}C$ , 40%RH~70%RH
  7. Unmarked Dimensional Tolerances:  $\pm 0.2mm$

**DALIAN GOOD DISPLAY CO., LTD**

DRAWN BY:	PRODUCT MODEL: GDEY075T7-T01	VIEW:
CHECKED BY:	CUSTOMER ID:	
APPROVED BY:	DATE: 2023-07-12	UNITS <b>mm</b>
Standard tolerance:	WEBSITE: www.good-display.com	SCALE <b>1:1</b>