


系统连接图 / System Connection

AV分配放大器用于将复合视频及立体声音频输入信号同步切换到输出通道中的任意通道上。
Composite Video & Audio Distribution Amplifier transfers video and audio inputs to any or all output channels.

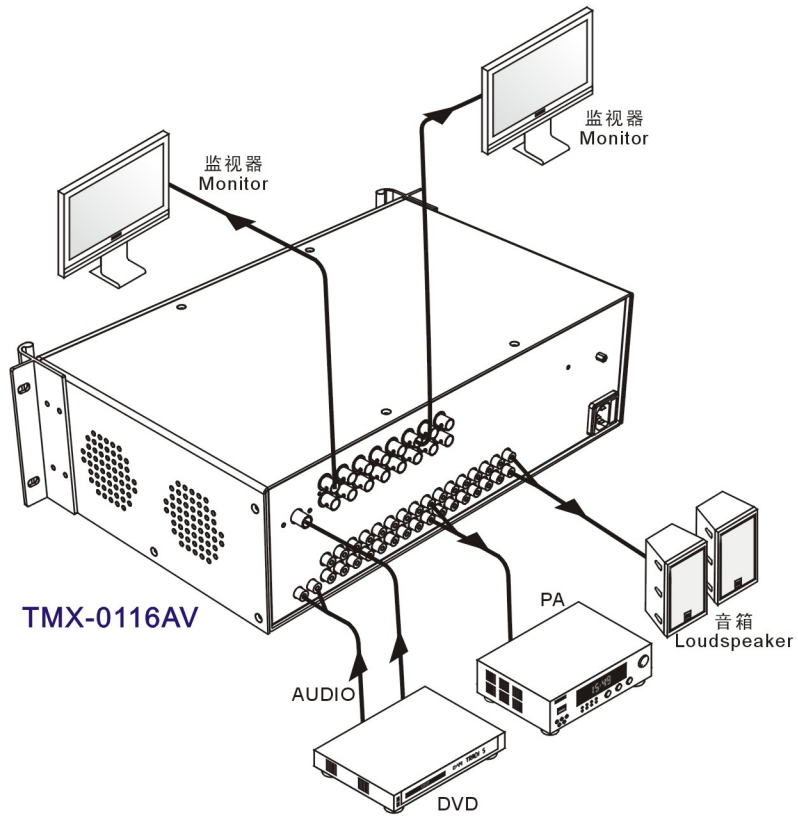

TAIDEN INDUSTRIAL CO.,LTD.

TAIDEN®

Composite Video & Audio Distribution Amplifiers

Excellent solutions for conferences




AV分配放大器

User's Manual


用户手册

V 1.0

功能指示 / Functions and indications

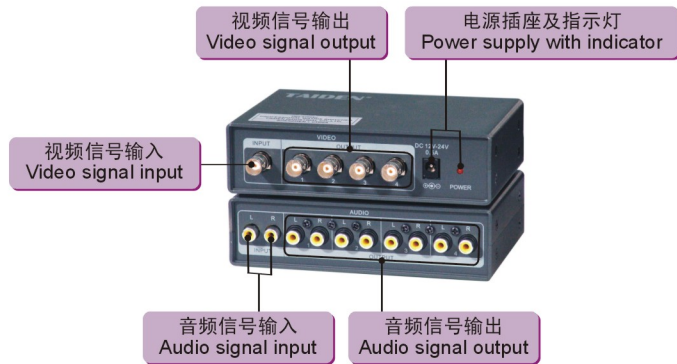

TMX-0104AV

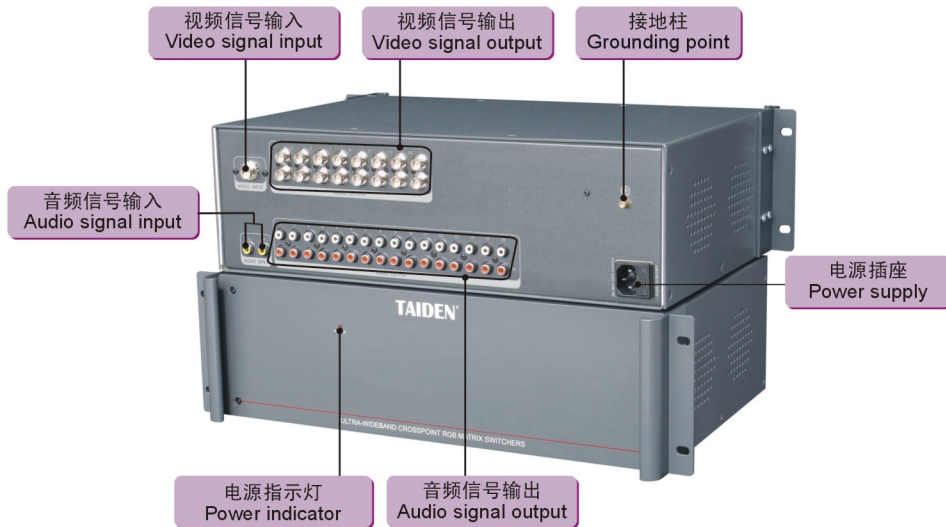

TMX-0116AV

* TMX-0108AV只具有8路输出通道
Only 8 output channels for TMX-0108AV

技术参数 / Technical Specifications

视频

视频带宽.....125 MHz (-3dB), 满载
输入/输出阻抗.....75 Ohm
信号类型.....复合视频
连接器.....输入: 1个BNC插座;
输出: 4、8、16个BNC插座

音频

信号类型.....立体声
连接器.....输入: 1对RCA插座;
输出: 4、8、16对RCA插座

其它

电源:
0104AV.....12 V DC - 24 V DC, 0.5 A
0108AV/0116AV.....100 V AC - 240 V AC,
50/60 Hz

温度:

工作温度.....0°C - +50°C
储存温度.....-20°C - +70°C
湿度.....10% to 90%

尺寸:

0104AV.....40×150×100 mm
0108AV/0116AV.....132×478×310 mm

重量: :

0104AV.....0.4 kg
0108AV.....3.9 kg
0116AV.....4.0 kg

Video

Bandwidth.....125 MHz (-3dB), fully loaded
Input/output impedance.....75 Ohm
Signal type.....Composite video
Connectors.....Input: 1×BNC female;
output: 4, 8, 16×BNC female

Audio

Signal type.....Stereo audio
Connectors.....Input: 1 pair of RCA female;
output: 4, 8, 16 pairs of RCA female

General specs

Power supply:

0104AV.....12 V DC to 24 V DC, 0.5 A
0108AV/0116AV.....100 V AC to 240 V AC,
50/60 Hz

Temperature:

Operating.....0 °C to + 50°C
Storage.....-20°C to + 70°C

Humidity.....10% to 90%

Dimensions:

0104AV.....40×150×100 mm
0108AV/0116AV.....132×478×310 mm

Weight:

0104AV.....0.4 kg
0108AV.....3.9 kg
0116AV.....4.0 kg

注意: 请使用原厂提供的专用电源适配器或电源线。

Note: Please use the specific power adapter or power cable only.