


# TAIDEN®

## Compact Digital Conference System

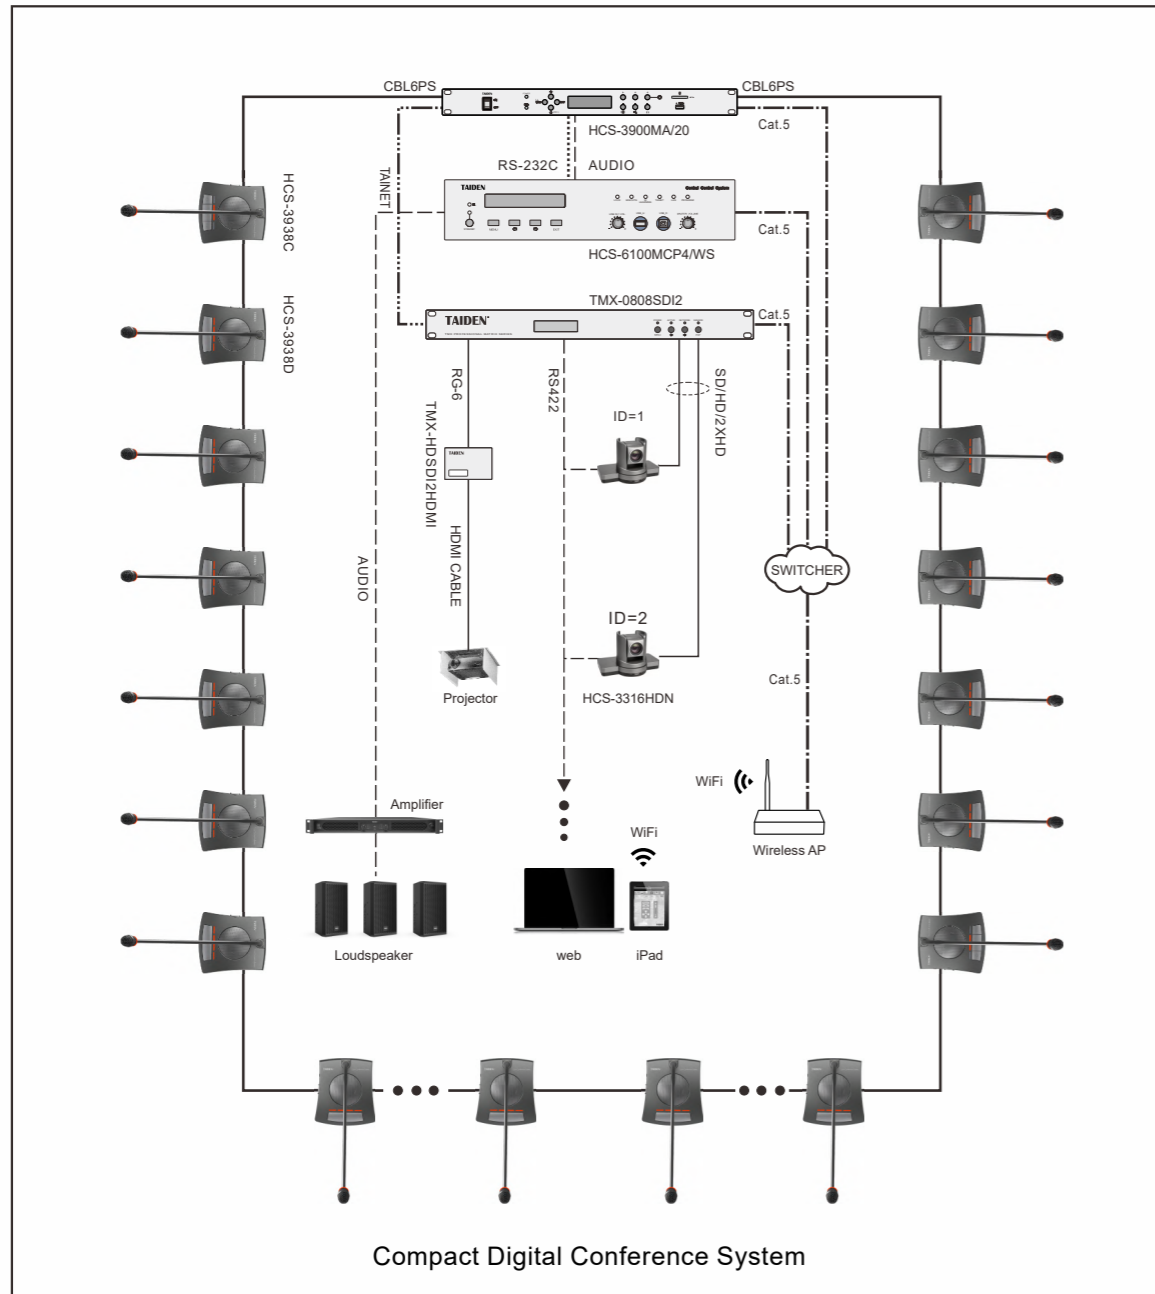

ISO9001: 2015  
 Certified by ANAB  
 Certificate No.: FM 85884

CE certified (including EMC and Safety)  
 Certificate No.: 2016NT05165784, 2016NT05165786

FCC certified  
 Certificate No.: 2016NT05165785

RoHS Comply with Directive  
 2011/65/EU of the  
 European Parliament

Distributed by:



Member of International Congress  
 & Convention Association (ICCA)



IB003900TD-202204EN  
 TAIDEN INDUSTRIAL CO., LTD.  
 Modifications reserved

# Compact Digital Conference System

- Economical and practical, designed for small and medium-sized conference room
- Fully digital audio technology
- Main unit with USB interface and SD card slot for conference audio recording and playback
- USB\_H interface for system upgrading
- USB\_D interface for lossless recording or input of streaming audio from PC
- Low power consumption
- Gain and low-cut of each microphone can be adjusted separately
- Conference main unit, with built-in monitor loudspeaker, can be directly employed in small and medium-sized meeting rooms without amplification system
- With Web page control function, main unit can be controlled through Web page
- “Daisy Chain” topology



## Conference unit

HCS-3938 series conference unit is refined, elegant and ergonomically designed. It can fit into any conference place while ensuring perfect acoustic performance. Conference units of the series come in two versions: chairman unit and delegate unit, featuring built-in loudspeaker, volume button and headphone jack. Fixed and removable stem microphones of different lengths are also available.



- 1 Uni-directional electret condenser microphone with two-color illuminated ring
- 2 Hi-Fi loudspeaker, minimal feedback, mutes automatically when microphone is active
- 3 Easy to operate with ergonomically designed buttons and two-color indicative ring. Chairman unit is equipped with Priority and Next buttons

## Conference main unit

HCS-3900M conference main unit is the heart of the whole conference system, and meeting can be managed easily with its five operation modes. To each main unit, a total of 50 conference units can be connected.

Function	No.	HCS-3900MA/20	HCS-3900MB/20
Speech		•	•
Audio Recording		•	
256 × 64 OLED		•	•
Trunk-line cable outlet		2	2



USB interface and SD card slot are equipped on main unit for conference audio recording and playback. The recording will switch to the other device when SD card or USB stick is full without interruption.

## Web Control

The user can access the IP address of main unit from web browser to handle meeting management, e.g. conference unit management, speaking and request list management, CMU setting, video matrix control, predefined position setting.

