

HCS-4842X4 64-Channel × 4 Portable Audio Distributor


Excellent solutions for conferences



HCS-4842X4 64通道×4便携式音频分配器 User's Manual
用户手册
V 1.0

TAIDEN INDUSTRIAL CO., LTD.

功能指示 / Functions and indications

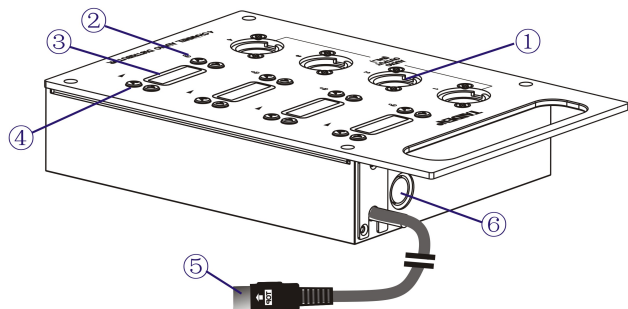

- | | |
|---|--|
| <p>①音频输出接口（3芯XLR, 平衡输出）</p> <p>②通道选择键</p> <ul style="list-style-type: none"> ◆ 通过∧、∨键选择语种通道，共64通道。 <p>③OLED显示屏</p> <ul style="list-style-type: none"> ◆ 显示当前通道号、信号强度、语种名称和音量。 <p>④音量调节键</p> <p>⑤2.1米8P-DIN标准插头电缆</p> <ul style="list-style-type: none"> ◆ 连接会议主机或上一台HCS-4842X4。 <p>⑥8P-DIN插座</p> <ul style="list-style-type: none"> ◆ 用于系统级联。 | <p>①Plug of audio output (3-pin XLR balanced output)</p> <p>②Channel selector buttons</p> <ul style="list-style-type: none"> ◆ Select language channel by pressing ∧ or ∨ button, there are 64 channels at all. <p>③OLED screen</p> <ul style="list-style-type: none"> ◆ Display for current channel number, signal strength, language name and volume. <p>④Volume control buttons</p> <p>⑤2.1 m cable with 8P-DIN plug</p> <ul style="list-style-type: none"> ◆ Connect to main unit or last HCS-4842X4. <p>⑥UPLINK, 8P-DIN socket</p> <ul style="list-style-type: none"> ◆ For cascade connection. |
|---|--|

技术参数 / Technical Specifications

频响.....100 Hz - 15 kHz	Frequency response.....100 Hz - 15 kHz
信噪比.....≥68 dB	S/N.....≥68 dB
音频输出.....4×XLR, 平衡输出	Audio output.....4×XLR Balanced output
.....最大0 dBVMax. 0 dBV
总谐波失真.....≤0.5%	THD.....≤0.5%
电源.....DC 48V, 65 mA	Power supply.....DC 48 V, 65 mA
尺寸.....226×141×42 mm	Dimensions.....226×141×42 mm
安装.....嵌入式或挂壁	Mounting.....Flush-mounting or wall-mounting
重量.....1.0 kg	Weight.....1.0 kg

系统连接图 / System Connection

HCS-4842X4是一台性能优良的音频通道分配器，采用全数字音频技术，内置高性能CPU，处理速度快，音质佳。具有64种语言通道，4路输出，每路输出都有独立的通道选择和音量调节按钮，OLED屏可显示当前通道号，语种名称及音量。带8P-DIN插口及插座，可通过手拉手连接方式扩展输出通道。

HCS-4842X4 is an audio channel distributor with excellent capability. It has superior acoustics and faster by using fully digital audio technology in combination with the built-in high performance CPU. It has 64 language channels for simultaneous interpretation and 4 audio outputs, each output is equipped with channel number, language and volume. With 8P-DIN plug and socket can be used to extend connection by "Daisy Chain" topology.

