

TMX-VGA2RGB VGA-RGBHV Converter

Excellent solutions for conferences



VGA-RGBHV转换器

User's Manual

用户手册


V 1.0

TAIDEN INDUSTRIAL CO.,LTD.


功能指示



Functions and indications

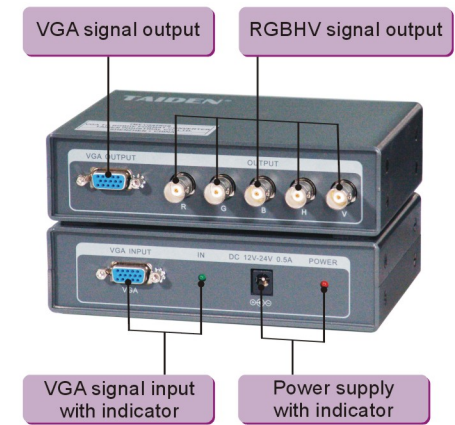

系统连接图

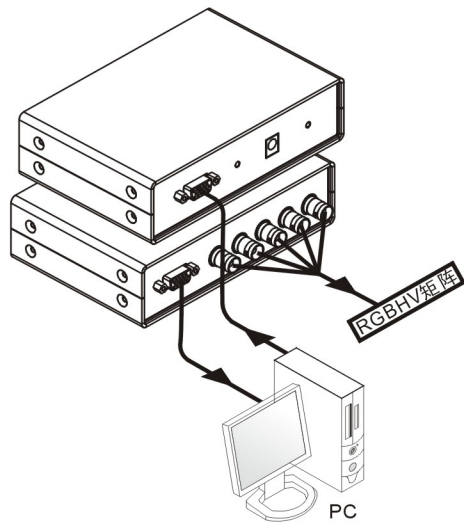

技术参数


视频
输入信号类型.....1路模拟VGA
输入连接器.....1个VGA 15针HDF接口
输入额定电平.....0.4 V~0.7 Vp-p
输出信号类型.....1路模拟RGBHV信号
输出连接器.....1个VGA 15针HDF接口
.....5个BNC接口
输出额定电平.....RGB: 0.7 Vp-p
分辨率.....与输入一致

同步
输出电平.....TTL (4.5 Vp-p - 5.0 Vp-p)

规格
电源.....12 V DC - 15 V DC, 0.5 A
温度:
工作温度.....0°C - +50°C
储存温度.....-20°C - +70°C
湿度.....10%-90%
尺寸.....150×100×40 mm
重量.....0.4 kg

注意：请使用原厂提供的专用电源适配器。

System Connection

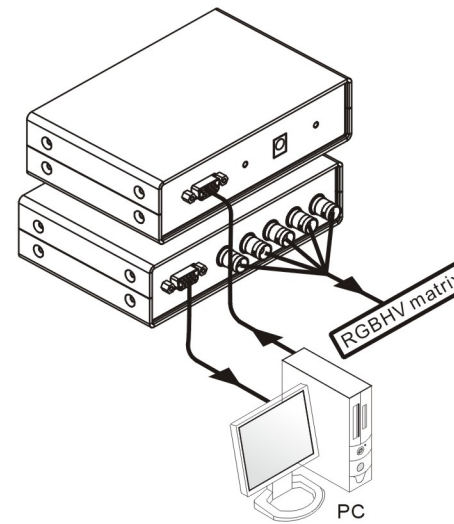

Technical Specifications

Video input
Signal type.....1 analog VGA
Connector..1 × VGA 15-pin HDF connector
Nominal level.....0.4 V - 0.7 Vp-p

Video output
Signal type.....1 analog RGBHV
Connector..1 × VGA 15-pin HDF connector
.....5 × BNC female
Nominal level.....RGB: 0.7 Vp-p
Resolution.....The same as input

Sync
Output levelTTL (4.5 Vp-p - 5.0 Vp-p)

General specs
Power supply.....12 V DC to 15 V DC, 0.5 A
Temperature
Operating.....0 °C to + 50°C
Storage.....-20°C to + 70°C
Humidity.....10% to 90%
Dimensions.....40×150×100 mm
Weight.....0.4 kg

Note: Please use the specialized power adapter only.