

PRODUCT SPECIFICATION

Model No.: FYLS-0404RGBC-CA-5mA

Features:
■ SMD Type
■ Size (mm):1.00*1.00*0.60
■ Emitting Color:Ultra Red/Purea Green/Ultra Blue.
■ Lens Color: Water clear.
■ SMT package
■ Suitable for all SMT assembly and soldering method
■ Pb-free Reflow soldering application
■ RoHS Compliant
■ MSL:6

Applications:
■ Light Strips
■ LCD Backlight
■ Decorative lighting
■ Indicators
■ Interior automotive
■ Illuminations
■ Mobile Phones



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

NINGBO FORYARD OPTOELECTRONICS CO.,LTD.

Add:No. 666 Jinghua Road, Hi-tech Park, Ningbo, Zhejiang, China

Zip:315103




Tel: 0086-574-87933652 87927870 87922206

Fax: 0086-574-87927917


E-mail:Sales@foryard.com (General)

Model No.: FYLS-0404RGBC-CA-5mA

■ Mechanical Dimensions

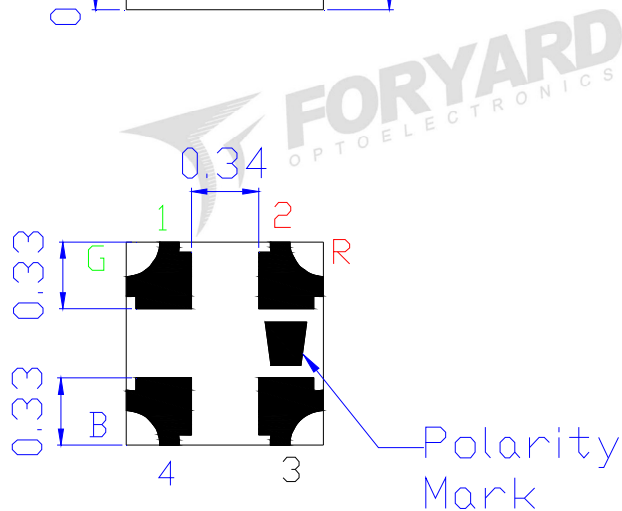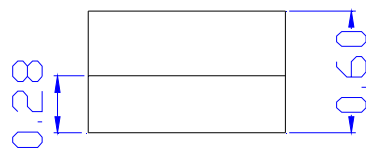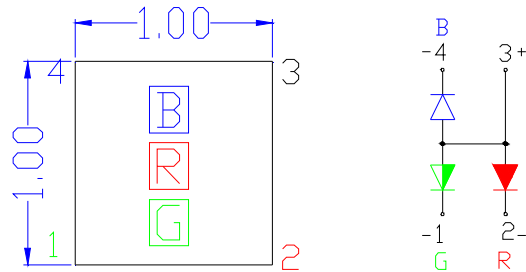

■ Recommend Soldering pad design(unit=mm)



Notes:

1. Dimension in millimeter, tolerance is ± 0.10 .
2. Angle: $\pm 5^\circ$
3. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.
4. The drawing is different from the actual one, please refer to the sample.

Model No.: FYLS-0404RGBC-CA-5mA

Absolute Maximum Ratings(Ta=25°C)

Parameter	Symbol	MAX.			Unit
		R	G	B	
Power Dissipation	PD	50	60	60	mW
Peak Forward Current*	IFP	50	50	50	mA
Continuous Forward Current	IF	20	20	20	mA
Reverse Voltage	VR	5			V
Operating Temperature Range	Topr	-40~ +85			°C
Storage Temperature Range	Tstg	-40~ +110			°C

*1/10 Duty Cycle, 0.1ms Pulse Width

Typical Electrical & Optical Characteristics(Ta=25°C)

Parameter	Color	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Forward Voltage	R	V _F	IF=5mA	1.7	---	2.3	V
	G		IF=3mA	2.5	---	3.5	
	B		IF=3mA	2.5	---	3.5	
Dominant Wavelength	R	λ _D	IF=5mA	---	622	---	nm
	G		IF=3mA	---	529	---	
	B		IF=3mA	---	467	---	
Luminous Intensity	R	I _v	IF=5mA	16	---	29.2	mcd
	G		IF=3mA	29.6	---	50	
	B		IF=3mA	5.8	---	12.7	
Reverse Current(DC)		I _R	VR=10V	---	---	2	μA
Viewing Angle		2θ _{1/2}	IF=5mA	---	115	---	Deg

Material

Item	Color	Reflector	Wire	Encapsulate	Chip
Material	R	/	Gold	Silicone	AlGaInP
	G				InGaN/GaN
	B				InGaN/GaN

Note:

- 1.Luminous Intensity is based on the Foryard standards.
- 2.Pay attention about static for InGaN

Model No.: FYLS-0404RGBC-CA-5mA

■ Luminous Intensity Guide (Unit: mcd) @IF=5mA

R	Code	E0	F0	F1
	Luminous Intensity(mcd)	16~21.6	21.6~29.2	19~25.7

■ Dominate Wavelength Guide (Unit: nm) @IF=5mA

R	Code	R1
	Dominate Wavelength(nm)	619.5~624.5

■ Forward Voltage Guide (Unit: V) @IF=5mA

R	Code	R0
	Forward Voltage(V)	1.7~2.3

■ Luminous Intensity Guide (Unit: mcd) @IF=3mA

G	Code	L0	M0	L1
	Luminous Intensity(mcd)	29.6~38.5	38.5~50	34~44.2

■ Dominate Wavelength Guide (Unit: nm) @IF=3mA

G	Code	G1	G2	G3	G4
	Dominate Wavelength(nm)	522~527	527~532	532~537	525~530

■ Forward Voltage Guide (Unit: V) @IF=3mA

G	Code	G0
	Forward Voltage(V)	2.5~3.5

■ Luminous Intensity Guide (Unit: mcd) @IF=3mA

B	Code	A0	C0	D0	C1
	Luminous Intensity(mcd)	5.8~7.5	7.5~9.8	9.8~12.7	9~11.7

■ Dominate Wavelength Guide (Unit: nm) @IF=3mA

B	Code	BA	B1	B3	B4
	Dominate Wavelength(nm)	459.5~464.5	464.5~469.5	469.5~474.5	467.5~472.5






■ Forward Voltage Guide (Unit: V) @IF=3mA

B	Code	B0
	Forward Voltage(V)	2.5~3.5

Tolerance of measurement of luminous intensity is $\pm 15\%$
 Tolerance for each Dominate Wavelength bin is $\pm 1\text{nm}$
 Tolerance of measurement of forward voltage is $\pm 0.1\text{V}$


Model No.: FYLS-0404RGBC-CA-5mA

Electrical-Optical Characteristics-

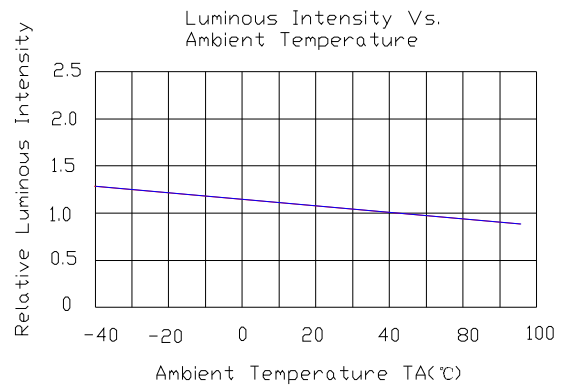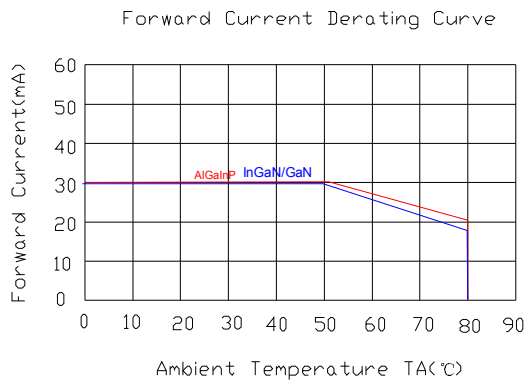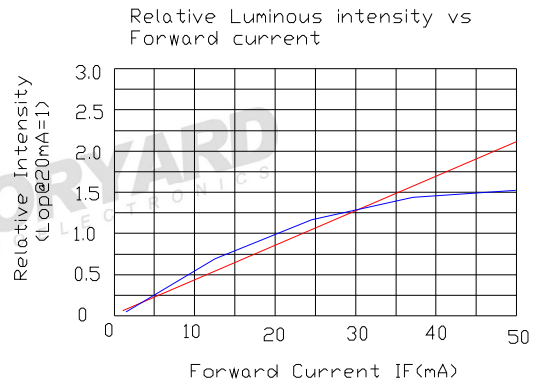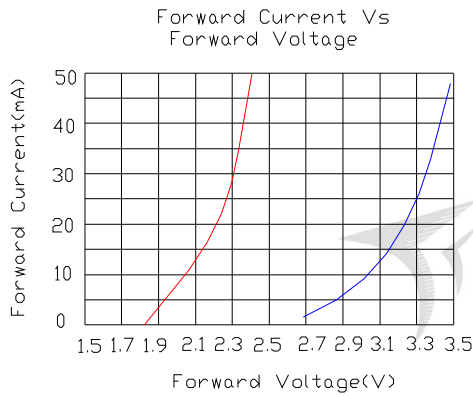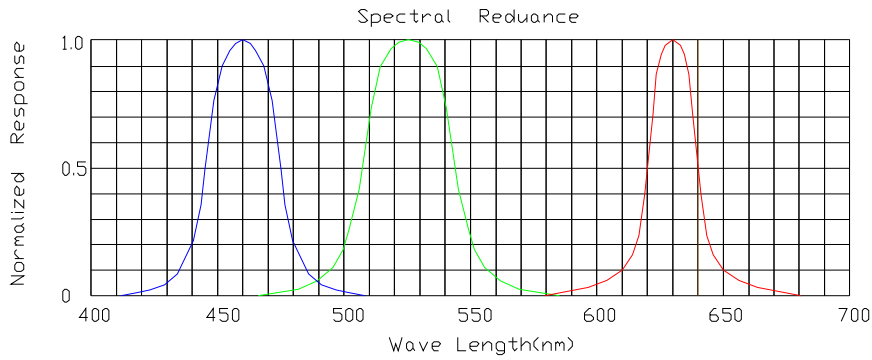

NOTE:25°C free air temperature unless other specified


Radiation pattern-

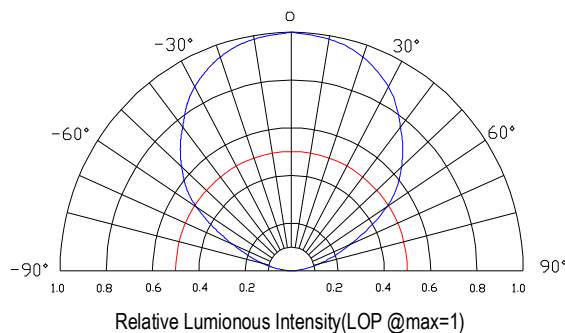


Model No.: FYLS-0404RGBC-CA-5mA

■ **Package-**

1. Reel Dimension

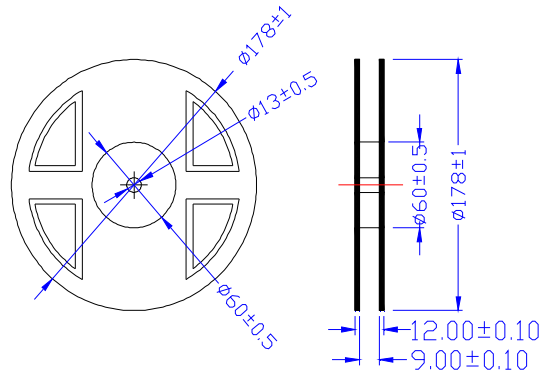

2. Tape Dimension

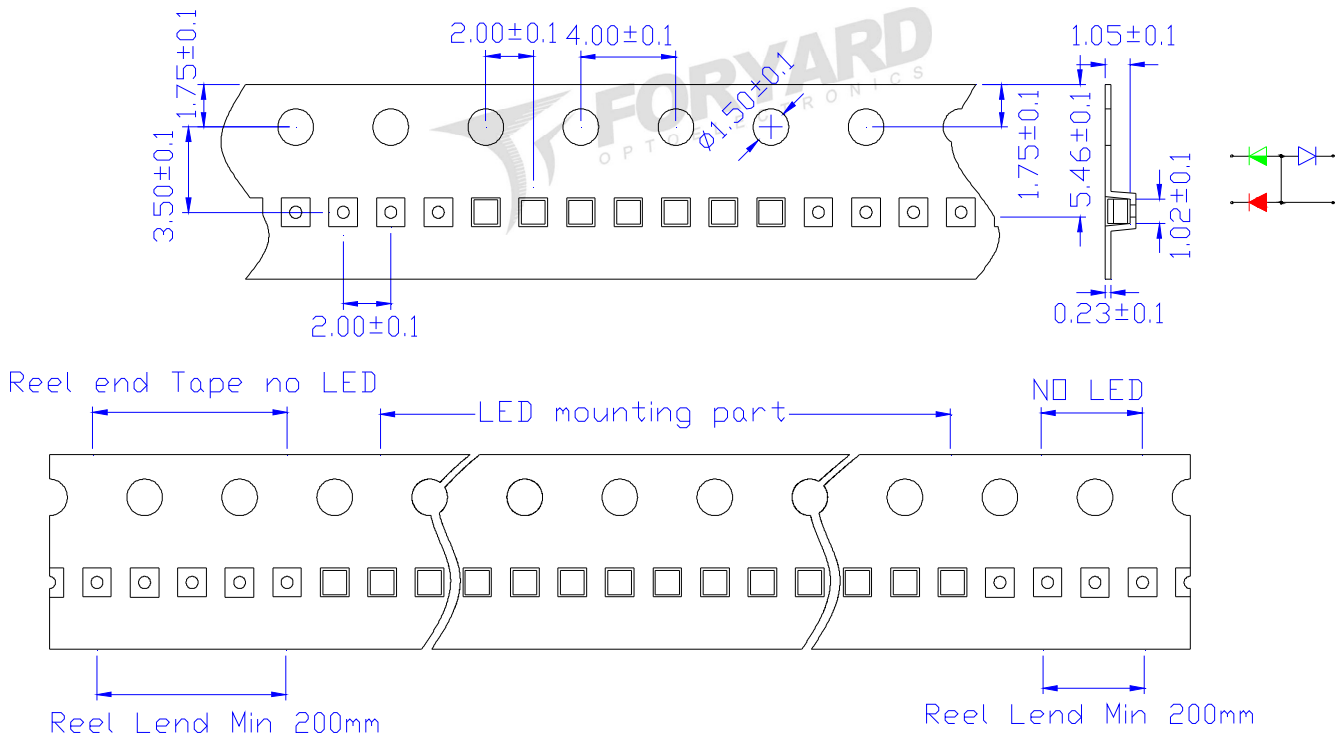



Notice:

1. Tolerance unless mentioned is $\pm 0.2\text{mm}$


Model No.:	FYLS-0404RGBC-CA-5mA
Date / Rev.	2023.01.31 / B

Model No.: FYLS-0404RGBC-CA-5mA

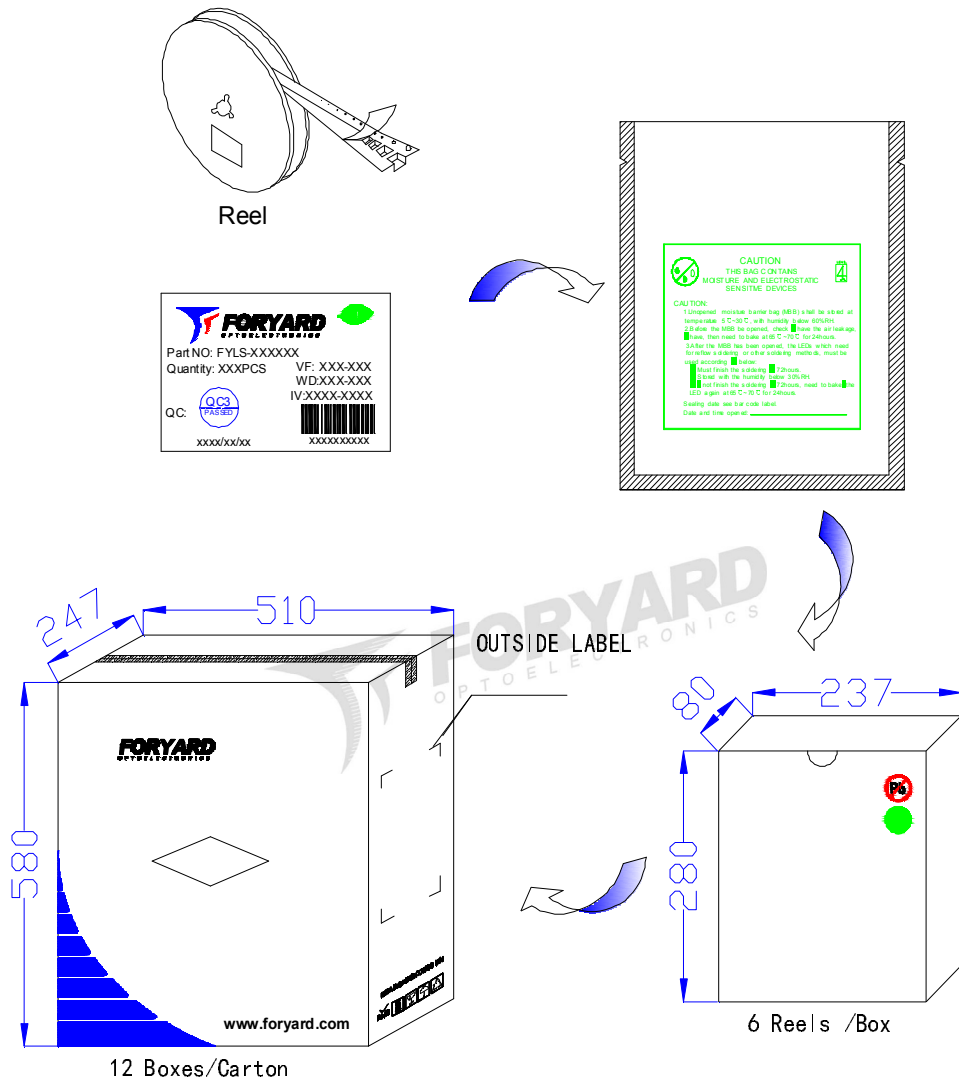

3. Packing Diagram

LED
PN: FYLS-XXXXXXXXXX
Qty: XXXXX PCS
Date: XXXX/XX/XX
GW: XX.XX KG
NW: XX.XX KG



XXXXXXXXXX

OUTSIDE LABEL

Notice:


- 1.Quantity:18000 PCS/Reel
- 2.The specifications are subject to change without notice. Please contact us for updated information.

Model No.: FYLS-0404RGBC-CA-5mA


■ Soldering Characteristics-

● Reflow Soldering

● Lead Solder

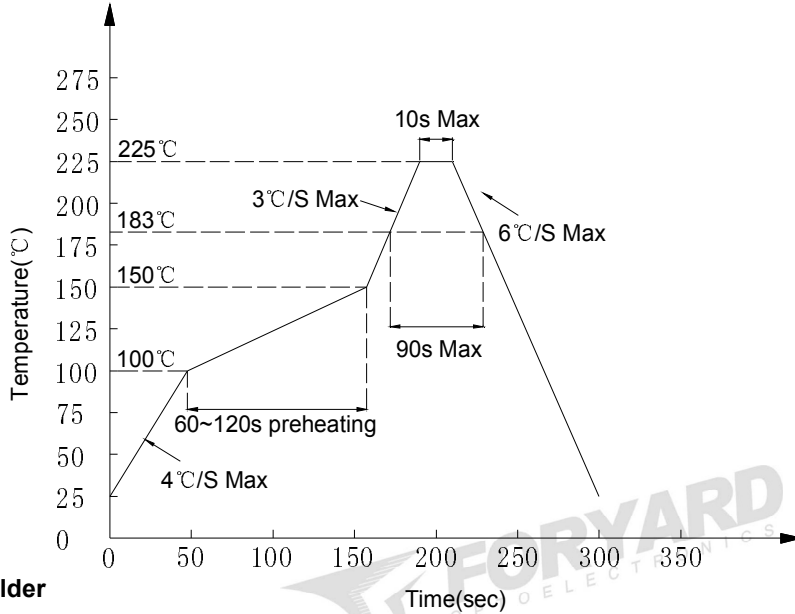

● Lead-free Solder

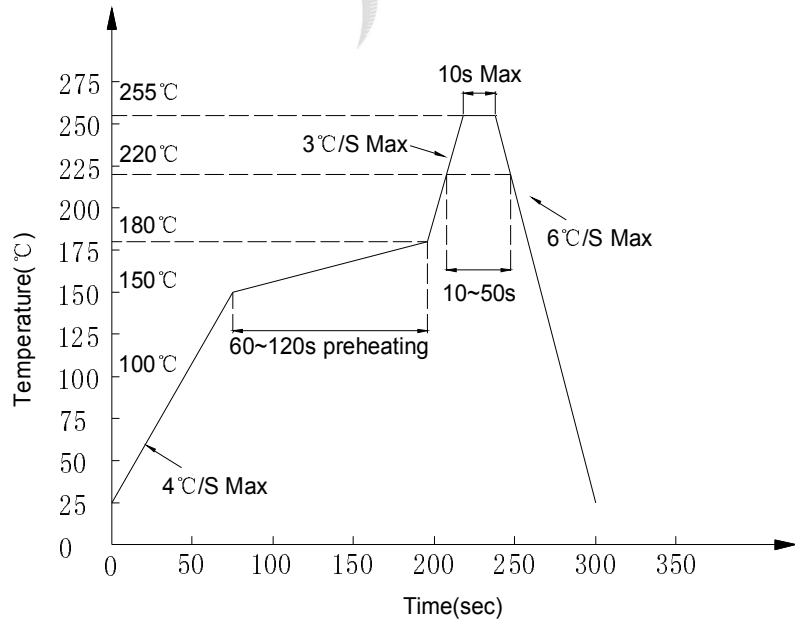

Notes:

1. Although the recommended soldering conditions are specified in above table, reflow or hand soldering at the lowest possible temperature is desired for the LEDs.
2. A rapid-rate process is not recommended for cooling the LEDs down from the peak temperature.
3. All temperatures refer to solder Pad.

● Hand Soldering


Soldering temperature	300°C Max. (25W Max.)	One time only
Soldering time	5 ±1sec	

Model No.: FYLS-0404RGBC-CA-5mA



■ **Handling of Silicone Resin LEDs-**

● **Handling Indications**

When handling the product, do not touch it directly with bare hands as it may contaminate the surface and affect on optical characteristics. In the worst cases, excessive force to the product might result in catastrophic failure due to package damage and/or wire breakage.




When handling the product with tweezers, LEDs should only be handled from the side and make sure that excessive force is not applied to the resin portion of the product. Failure to comply can cause the resin portion of the product to be cut, chipped, delaminated and/or deformed, and wire to be broken, and thus resulting in catastrophic failure.



■ **Recommended circuit-**

• In designing a circuit, the current through each LED must not exceed the absolute maximum rating specified for each LED. It is recommended to use Circuit B which regulates the current flowing through each LED. In the meanwhile, when driving LED with a constant voltage in Circuit A, the current through the LEDs may vary due to the variation in forward voltage (VF) of the LEDs. In the worst case, some LED may be subjected to stresses in excess of the absolute maximum rating.

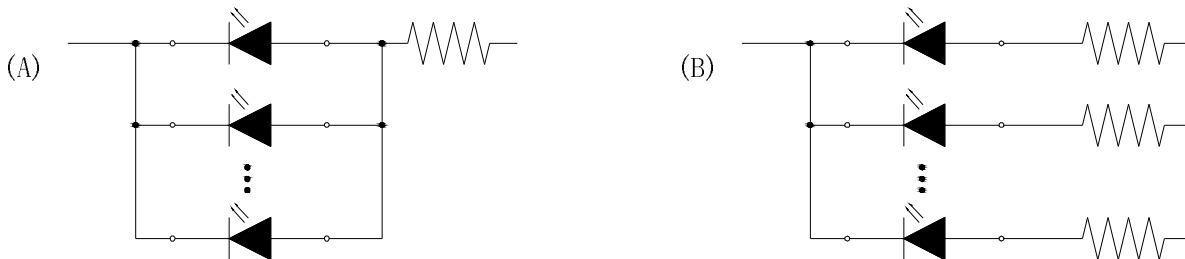

• This product should be operated in forward bias. A driving circuit must be designed so that the product is not subjected to either forward or reverse voltage while it is off. In particular, if a reverse voltage is continuously applied to the product; such operation can cause migration resulting in LED damage.

■ **Storage-**

● **Storage Conditions**

1. Unopened moisture barrier bag (MBB) shall be stored at temperature below 5°C~30°C, with humidity below 60%RH.
2. Before the MBB be opened, check if have the air leakage, if have, then need to bake at 65°C~70°C for 24hours.
3. After the MBB has been opened, the LEDs which need for reflow soldering or other soldering methods, must be used according to below:
 - a: Must finish the soldering in 72hours
 - b: Stored with the humidity below 30%RH
 - c: If not finish the soldering in 72hours, need to bake the LED again at 65°C~70°C for 24hours