

SIT506F-A Photo Interrupter

Dimensions

Unit:mm


The SIT506F-A is a photointerrupter high-performance standard type, combines high-output GaAs IRED with high sensitive phototransistor.

Features

- PCB direct mount type
- GAP:5mm
- With the installation positioning boss
- RoHS Compliance

Applications

- Printers
- FAX
- Copiers
- Scanners
- Amusement machines

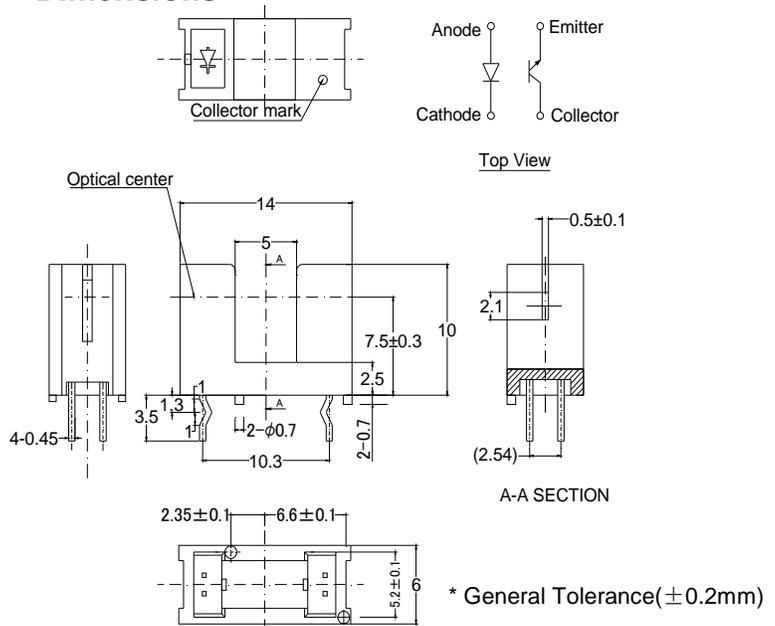

Maximum Ratings

(Ta=25°C)

Item		Symbol	Rating	Unit
Input	Power dissipation	P_D	100	mW
	Forward current	I_F	60	mA
	Reverse voltage	V_R	5	V
Output	Collector power dissipation	P_C	100	mW
	Collector current	I_C	40	mA
	Collector-Emitter voltage	V_{CEO}	30	V
	Emitter-Collector voltage	V_{ECO}	5	V
Operating temperature		Topr.	-20~+85	°C
Storage temperature		Tstg.	-30~+85	°C
Soldering temperature * 1		Tsol.	260	°C

* 1.The soldering should be 1.2mm away from bottom of the holder. t=within 3s









Electro-Optical Characteristics

(Ta=25°C)


Item		Symbol	Conditions	Min	Typ	Max	Unit
Input	Forward voltage	V_F	$I_F=20mA$	-	1.2	1.4	V
	Reverse current	I_R	$V_R=5V$	-	-	10	μA
	Peak wavelength	λ_p	$I_F=20mA$	-	940	-	nm
Output	Dark current	I_{CEO}	$V_{CE}=10V, E_V=0lx$	-	1	100	nA
Transfer characteristics	Light current	I_C	$I_F=20mA, V_{CE}=5V, Non-shading$	0.5	-	10	mA
	Leak current	$I_{CEO D}$	$I_F=20mA, V_{CE}=5V, Shading$	-	0.5	10	μA
	C-E saturation voltage	$V_{CE} (sat)$	$I_F=20mA, I_C=0.1mA$	-	0.15	0.4	V
	Rise time	tr	$I_C=2mA, V_{CC}=5V, R_L=100\Omega$	-	4	-	μs
	Fall time	tf		-	5	-	μs

Photo Interrupter

SIT506F-A

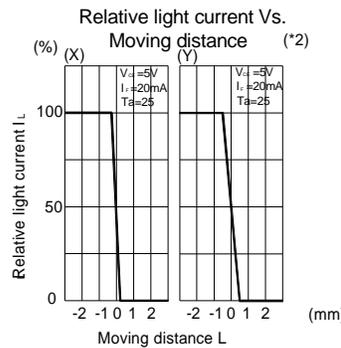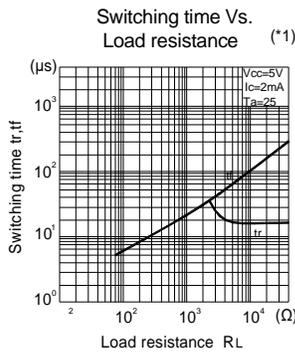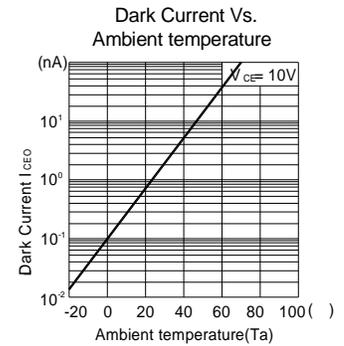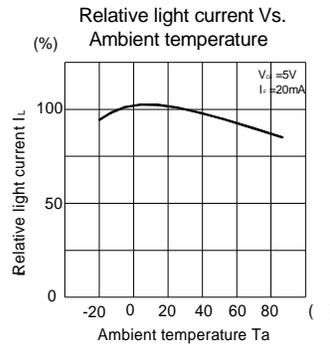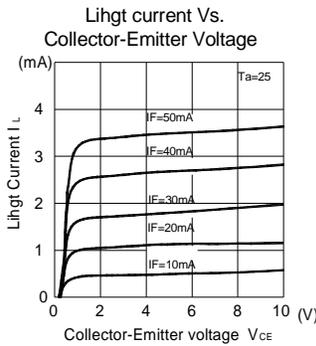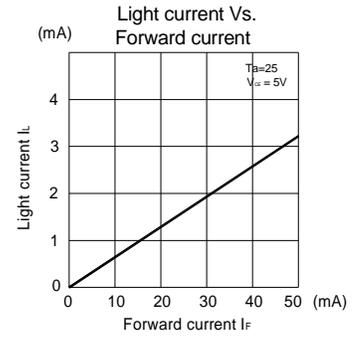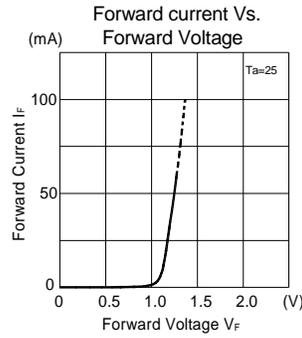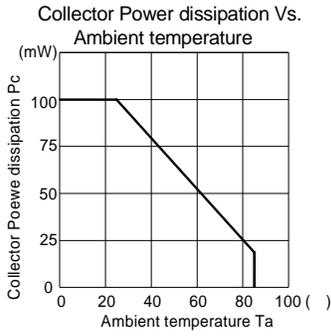

*1 Switching time measurement circuit



*2 Switching time measurement circuit (X) (Y)

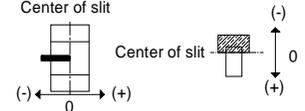


Photo Interrupter

SIT506F-A

Packing Specification

- 1.Fixed quantity (max 1000pcs) of the products are packed into plastic bag(300*380)
- 2.Six bags of the products are put into #2 box(max 6000pcs)
3. Two #2 Boxes are put into #3 Box(max 12000pcs)
4. Packing slip is pasted on #3 box.

