

NEW PRODUCT



SIC401D Photo Interrupter

SIC401D is transmission type photointerrupter combined high power GaAs IRED with Photo-IC. Being suitable for highly accurate position detecting, it is great help in developing an object detecting system of high performance and high reliability.

Features


- PWB direct mount type
- GAP:3.6mm
- Double-side screw mount (adjustable mounting position)

Applications

- Printer
- Fax
- Vending machines
- Amusement machines
- Encoders

Dimensions

(Unit: mm)

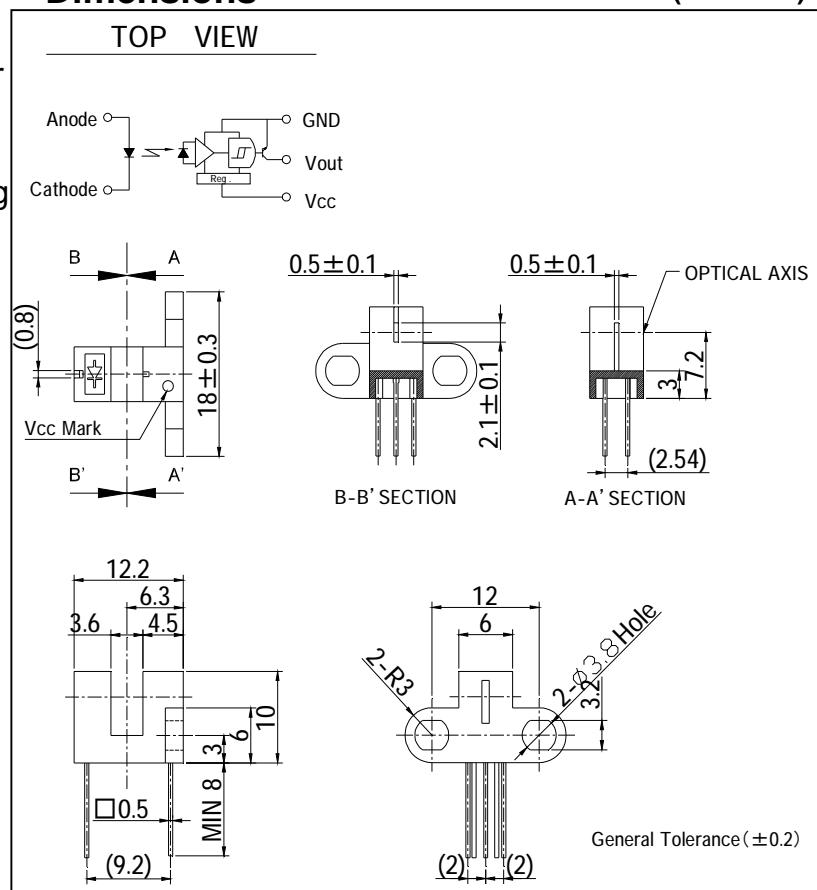

Maximum Ratings

(Ta=25°C)

Item	Symbol	Rating	Unit
Input	P _D	100	mW
	I _F	60	mA
	V _R	5	V
	I _{FP}	1	A
Output	V _{CC}	17	V
	I _{OL}	30	mA
	P _O	200	mW
Operating temperature ^{*2}	To pr.	-20 ~ +85	°C
Storage temperature ^{*2}	T stg.	-30 ~ +85	°C
Soldering temperature ^{*3}	T sol.	260	°C

*1 pulse width: $t_w \leq 100\mu s$ period: $T = 10ms$

*2 No icebound or dew.

*3 The soldering should be 1mm away from bottom of the holder t=within 5s

Photo Interrupter

SIC401D

Elector-Optical Characteristics

(Ta=25°C)

Item		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	V _F	I _F =20mA	-	1.2	1.4	V
	Reverse current	I _R	V _R =5V	-	-	10	μA
	Peak wavelength	λ _P	I _F =20mA	-	940	-	nm
Output	Operating voltage	V _{CC}	—	4.5	—	16.5	V
	Low level output voltage	V _{OL}	V _{CC} = 5V, I _F = 0mA, I _{OL} = 16mA	—	—	0.4	V
	High level output voltage	V _{OH}	V _{CC} = 5V, I _F = 20mA, R _L = 10kΩ	4.5	—	—	V
	Low level supply current	I _{CCL}	V _{CC} = 5V, I _F = 0mA, R _L = 10kΩ	—	—	10	mA
	High level supply current	I _{CCH}	V _{CC} = 5V, I _F = 20mA, R _L = 10kΩ	—	—	10	mA
Transfer characteristics	L→H threshold input current	I _{FLH} ^{*4}	V _{CC} = 5V, R _L = 10kΩ	—	5	12	mA
	Hysteresis	I _{FHL} /I _{FLH} ^{*5}	V _{CC} = 5V, R _L = 10kΩ	—	0.8	—	—
	H→L propagation speed	t _{PHL}	V _{CC} = 5V, I _F = 18mA, R _L = 3.3kΩ	—	3	—	μs
	L→H propagation speed	t _{PLH}		—	1	—	μs
	Rise time	tr		—	0.6	—	μs
	Fall time	tf		—	0.02	—	μs

*4 IFLH represents forward current when output changes from low to high.

*5 IFHL represents forward current when output changes from high to low.




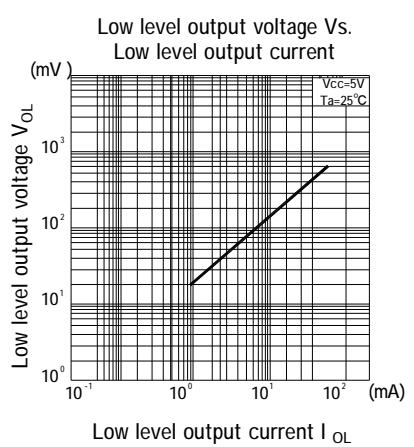



Photo Interrupter

SIC401D


Relative threshold input current Vs.
Supply voltage

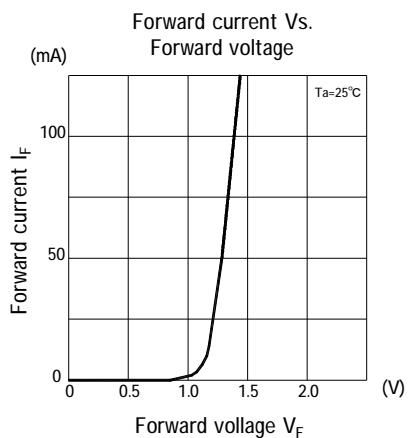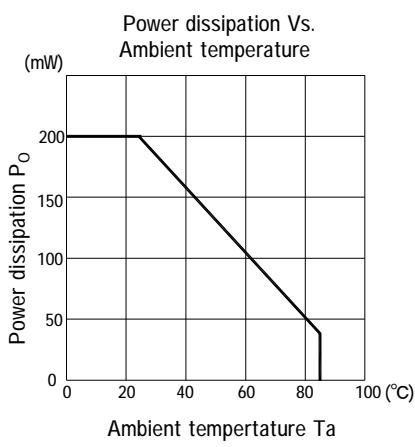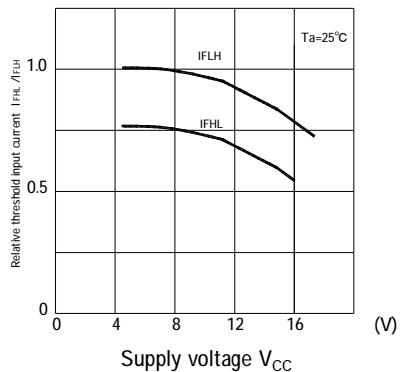

Relative threshold input current Vs.
Ambient temperature

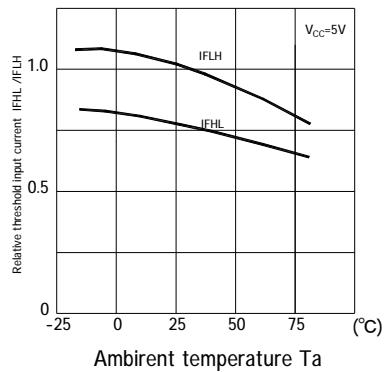

Measurement of high output voltage

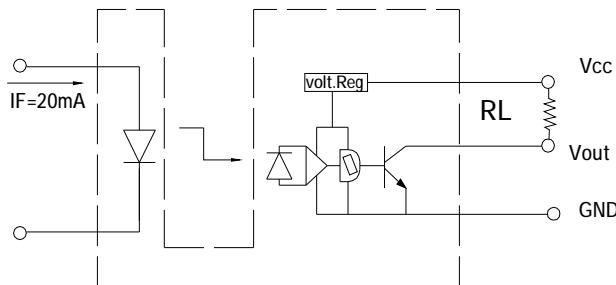

Measurement of propagation time


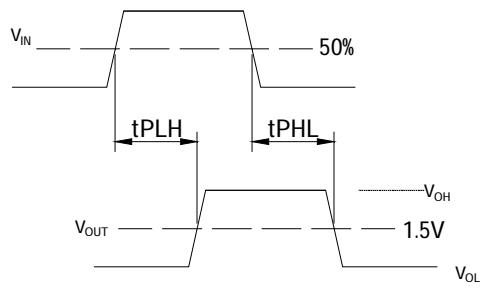


Photo Interrupter

SIC401D

Packing Specification

1. Fixed quantity (Max 400pcs) of the products are packed into plastic bags
2. Ten bags of the products are put into #2 Box (Max 4000pcs)
3. Two #2 Boxes are put into #3 Boxes
4. Paste packing slip

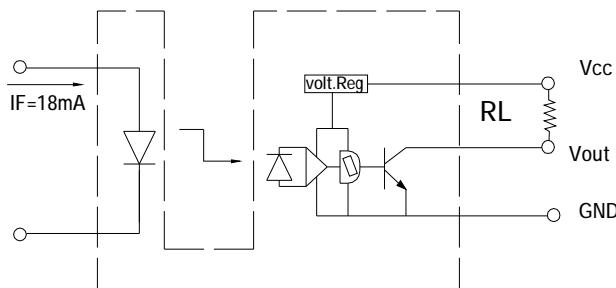