

Table model Single flavor

6212 Gravity Feed

Feature

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet.

Freezing Cylinder

One, 1.0 Liter

Mix Hopper

One, 4 Liter

Separate hopper refrigeration(Pre-cooling)maintains mix below 4.4°C.

Microprocessor Controls

Microprocessor regulates refrigeration by measuring product viscosity to maintain consistent quality.

Mix low light


The mix low light turns "ON" to alert operator to add mix, Preventing cylinder over freezing.

Counter

Records number of dispenses per day and total number of dispenses.

Output

12 Liter/Hour(At 4°C Liquid & 24°C Ambient)

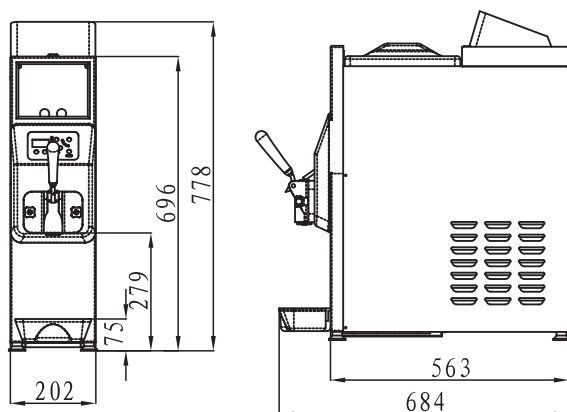

Equipment parameters

Model	Dimension(mm) (NET)	Dimension(mm) (PACKING)
6212	684x202x778	770x290x960
Model	N.W.(kg)	G.W.(kg)
6212	60	70
Model	Voltage	Power
6212	210-230V/50Hz	1.4KW

6212



Electrical requirements

One dedicated electrical connection is required. Make voltage steady when machine is ON.

Main motor

One, 1.0HP

Refrigeration system

One compressor: 2800 BTU/hr. R404a

Separate hopper refrigeration(Pre-cooling):

Air Cooled

Minimum clearance of 152mm on both sides is to achieve optimum performance.

Refer to the local situation to regulate the parameters, on basic of the data label. Specifications of the improvements are subject to change without notice.

Options

- Power Supply :208-230V/60HZ/1PH 208-230V/60HZ/3PH
- Water Cooled
- Cone Dispenser
- Frequency converter--low noise

PACKING: CARTON WITH PALLET

LOADED IN 20' CONTAINER: 120 UNITS

LOADED IN 40' CONTAINER: 240 UNITS

Ningbo SICEN Refrigeration Equipment CO.,LTD

ADD: No.1 Jiangzhong Village, The Hemudu Town, Yuyao City, Zhejiang Province, China 315414

Tel: (86) 574-62956998

Fax: (86) 574-62956997

Web: www.space-icecream.com

ISO 9001:2008
Registered Firm