

Floor model Single flavor

6238 Gravity Feed

Feature

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet.

Freezing Cylinder

One, 3.2 Liter

Mix Hopper

One, 15 Liter Separate hopper refrigeration(Pre-cooling)maintains mix below 4.4° C.

Microprocessor Controls

Microprocessor regulates refrigeration by measuring product viscosity to maintain consistent quality.

Mix low light

The mix low light turns "ON" to alert operator to add mix,Preventing cylinder over freezing.

Standby

Maintains product temperature in the mix hoppers and freezing cylinders below $4.4\,^{\circ}\mathrm{C}$ during long no-use periods.

Counter

Records number of dispenses per day and total number of dispenses.

Agitator in the hopper

Mixture has better liquidity, the temperature of the Mix to be more uniform.

Output

38 Liter/Hour (At 4℃ Liquid &24℃ Ambient)

6238









Flexible blade beater Higher capacity, higher overrun



6238

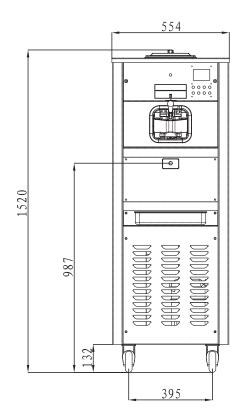

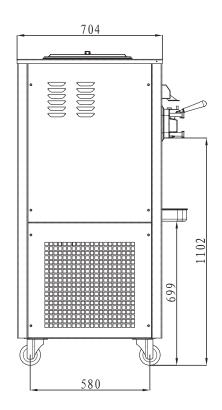

Equipment parameters

Model	Dimension(mm) (NET)	Dimension(mm) (PACKING)
6238	704x554x1520	850x645x1665

Model	N.W.(kg)	G.W.(kg)
6238	170	190

Model	Voltage	Power
6238	210-230V/50Hz	2.8KW

PACKING: CARTON WITH PALLET LOADED IN20'CONTAINER: 22 UNITS LOADED IN40'CONTAINER: 44 UNITS

Electrical requirements

One dedicated electrical connection is required. Make voltage steady when machine is ON.

Main motor

6238: One, 2.0HP

Refrigeration system

One compressor:6486 BTU/hr.R404a Separate hopper refrigeration(Pre-cooling): One compressor:400BTU/hr.R134a (BTU may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm on both sides is to achieve optimum performance.

Refer to the local situation to regulate the parameters, on basic of the data label. Specifications of the improvements are subject to change without notice.

Options

- Power Supply:208-230V/60HZ/1PH 380-415V/50HZ/3PH
- Water Cooled
- · Cone Dispenser

