

Table model Single Flavor

6238A

MODEL 6238A

6238A Air Pump

(Gear pumps ensure a high overrun ice cream)

Feature

Offer all the popular soft serve variations from low or non-fat ice creams to custards, yogurt and sorbet.

Freezing Cylinder

One, 3.2 Liter

Mix Hopper

One, 15 Liter

Separate hopper refrigeration (Pre-cooling) maintains mix below 4.4°C.

Microprocessor Controls

Microprocessor regulates refrigeration by measuring product viscosity to maintain consistent quality.

Mix low light

The mix low light turns "ON" to alert operator to add mix, Preventing cylinder over freezing.

Standby

Maintains product temperature in the mix hoppers and freezing cylinders below 4.4°C during long no-use periods.

Counter

Records number of dispenses per day and total number of dispenses.


Agitator in the hopper

Mixture has better liquidity, the temperature of the Mix to be more uniform.


Output

38 Liter/Hour


(At 4°C Liquid & 24°C Ambient)



Flexible blade beater
Higher capacity, higher overrun

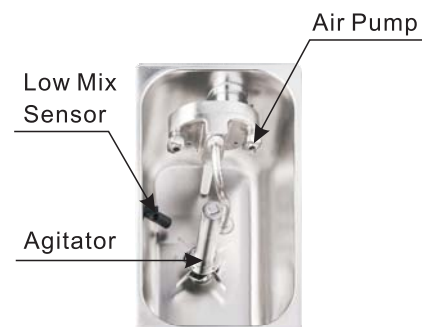

6238A

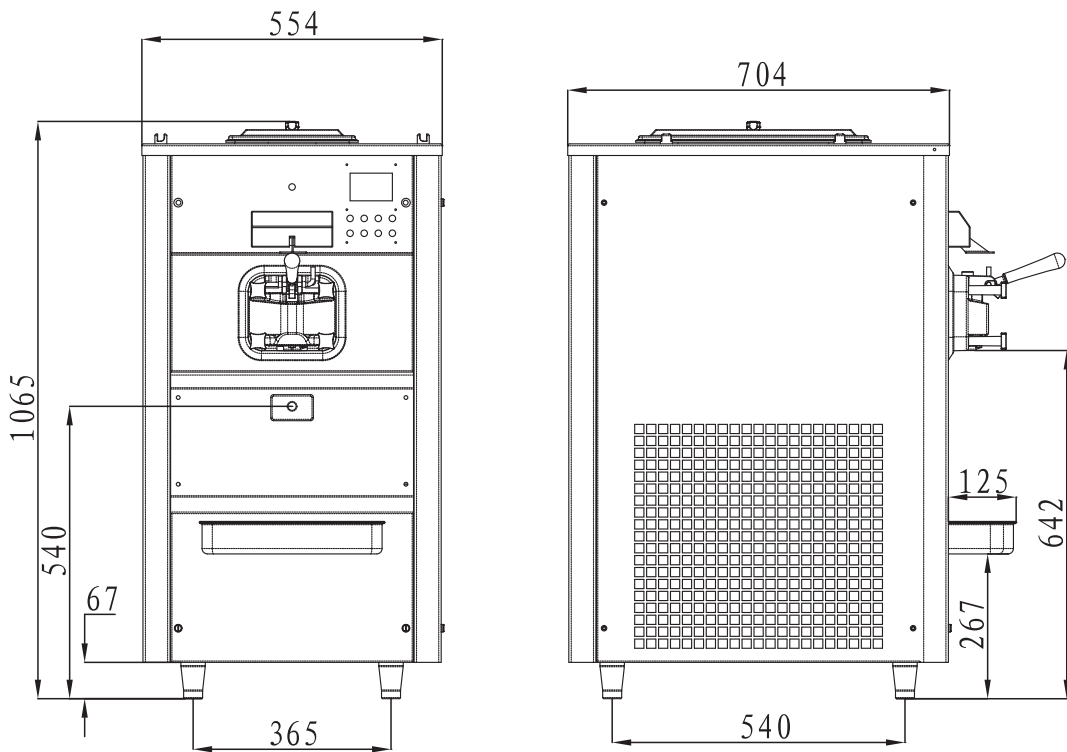

Equipment parameters

Model	Dimension(mm) (NET)	Dimension(mm) (PACKING)
6238A	704 x554x1065	850x645x1250

Model	N.W.(kg)	G.W.(kg)
6238A	160	180

Model	Voltage	Power
6238A	210-230V/50Hz/60Hz	2.8KW

Electrical requirements

One dedicated electrical connection is required. Make voltage steady when machine is ON.

Main motor

One, 2.0HP

Refrigeration system

One compressor:6486 BTU/hr.R404a
 Separate hopper refrigeration(Pre-cooling):
 One compressor:400BTU/hr.R134a
 (BTU may vary depending on compressor used.)

Air Cooled

Minimum clearance of 152mm on both sides is to achieve optimum performance.

Refer to the local situation to regulate the parameters, on basic of the data label.Specifications of the improvements are subject to change without notice.

PACKING: CARTON WITH PALLET
LOADED IN 20' CONTAINER: 22 UNITS
LOADED IN 40' CONTAINER: 44 UNITS

Options

- Local specific plugs of power supply wire
- Cup Dispenser
- Power Supply 220V/60Hz 3PH