


單位：mm

產品型號： FAL0061-OH


No.	項目		規格
1	CCD		1" (16.4mm)
2	焦距		25mm
3	接口		C-Mount
4	光圈範圍		F1.4-F22
5	對焦範圍		0.3m~∞
6	視場角 (對角×水平×垂直)	1"	36.66°×29.35°×22.04°
		2/3"	25.24°×20.20°×15.16°
		1/2"	18.37°×14.70°×11.03°
		1/3"	13.79°×11.03°×8.28°
7	對象大小 (在最近對焦距離處)	1"	198.59×157.08×116.85mm
		2/3"	134.32×106.94×79.91mm
		1/2"	97.07×77.46×57.99mm
		1/3"	72.58×57.99×43.44mm
8	后焦距 (in air)		20.84mm
9	操作方式	對焦	手動
		光圈	M-Iris
10	畸變率	1"	-3.09%@y=8mm
		2/3"	-1.38%@y=5.5mm
		1/2"	-0.72%@y=4.0mm
		1/3"	-0.4%@y=3.0mm
11	工作波長		700~1700nm
12	鏡頭尺寸 (寬×長)		64×56.6mm
13	重量		<200g
14	濾鏡尺寸		M46X0.75

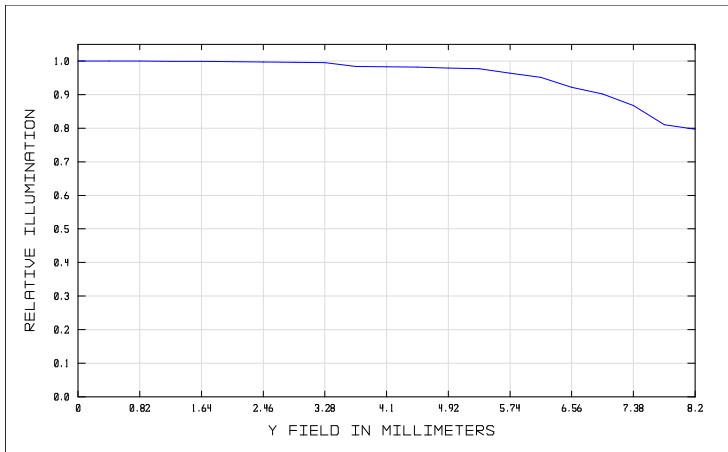

RELATIVE ILLUMINATION

WED NOV 28 2018
WAVELENGTH: 1.200000 μ m


25-20181108-009-FINAL.ZMX
CONFIGURATION 1 OF 1

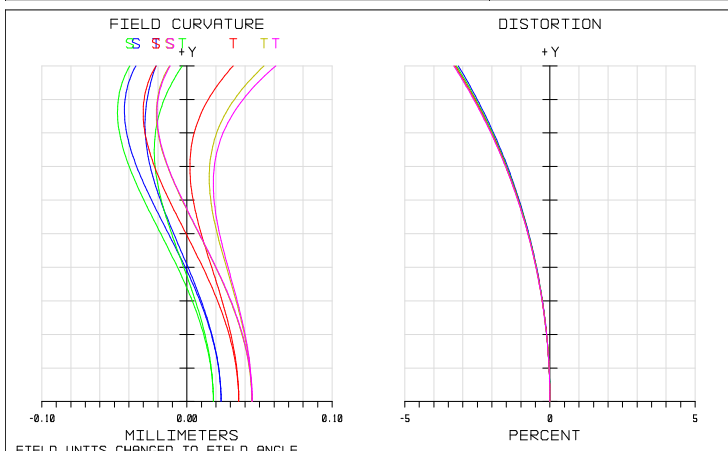

FIELD CURVATURE / F-TAN(THETA) DISTORTION

WED NOV 28 2018
MAXIMUM FIELD IS 18.791 DEGREES
WAVELENGTHS: 0.700 0.900 1.200 1.500 1.700

25-20181108-009-FINAL.ZMX
CONFIGURATION 1 OF 1

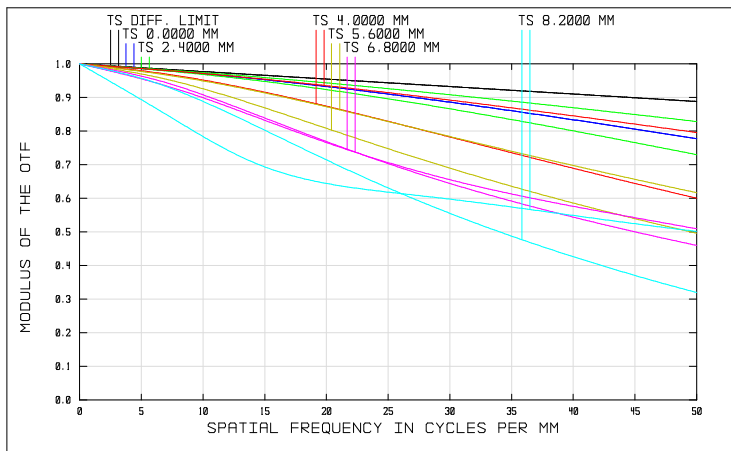

POLYCHROMATIC DIFFRACTION MTF

WED NOV 28 2018
DATA FOR 0.7000 TO 1.7000 μ m.
SURFACE: IMAGE

25-20181108-009-FINAL.ZMX
CONFIGURATION 1 OF 9