

多层镀膜·有效抑制雜光和鬼像


對應五百萬像素相機

高分辨率、高對比度成像

聚焦和光圈調節螺絲鎖定

緊湊的結構設計

低畸變成像

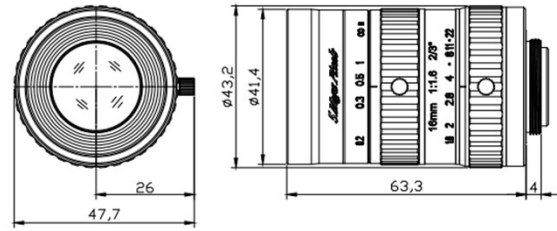

5MP

C-Mount


2/3"

M-Iris

### 產品型號：M1616M-5MP

No	項目	規格	
1	最大传感器尺寸	2/3"(11mm)	
2	焦距	16mm	
3	接口	C-Mount	
4	F/#	F1.6-F22	
5	工作距离	0.2m~∞	
6	视场角 ( 对角×水平×垂直 )	2/3"	38.0°×30.8°×23.4°
		1/2"	28.1°×22.7°×17.1°
		1/3"	21.3°×17.1°×12.9°
7	对象大小 ( 在最近对焦距离处 )	2/3"	145.6×116.5×87.3mm
		1/2"	105.9×84.6×63.5mm
		1/3"	79.4×63.5×47.6mm
8	后焦距 ( in air )	12.36mm	
9	操作方式	对焦	手动
		光圈	手动
10	畸变率	2/3"	0.07%@y=5.5mm
		1/2"	-0.06%@y=4.0mm
		1/3"	-0.06%@y=3.0mm
11	滤镜尺寸	M37.5×0.5mm	
12	镜头尺寸 ( 宽×长 )	43.2×63.3mm	
13	重量	181g	
14	工作温度	-10°C ~ +50°C	
15	入瞳距离	20.76mm	
16	入瞳直径	9.98mm	
17	出瞳距离	-138.99mm	
18	出瞳直径	86.80mm	
19	光学总长	74.92mm	
20	放大倍率	-0.0757	
对焦距离	放大倍率	前景深(mm)	后景深(mm)
200mm	-0.07572	1.6921	1.7212
250mm	-0.06118	2.6382	2.6953
300mm	-0.05131	3.7911	4.3891
350mm	-0.04421	5.1493	5.3051
400mm	-0.03882	6.0122	6.9450
450mm	-0.03462	8.4772	8.8082
500mm	-0.03123	10.4431	10.8982
550mm	-0.02845	12.6141	13.2163
600mm	-0.02612	14.9755	15.7624
650mm	-0.02415	17.5391	18.5391

CRA

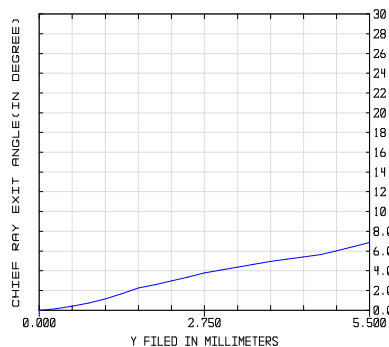

MTF

