


# Multi-coaxial Cable Assembly Datasheet



## RCHS-SD08-xxxS-4NC

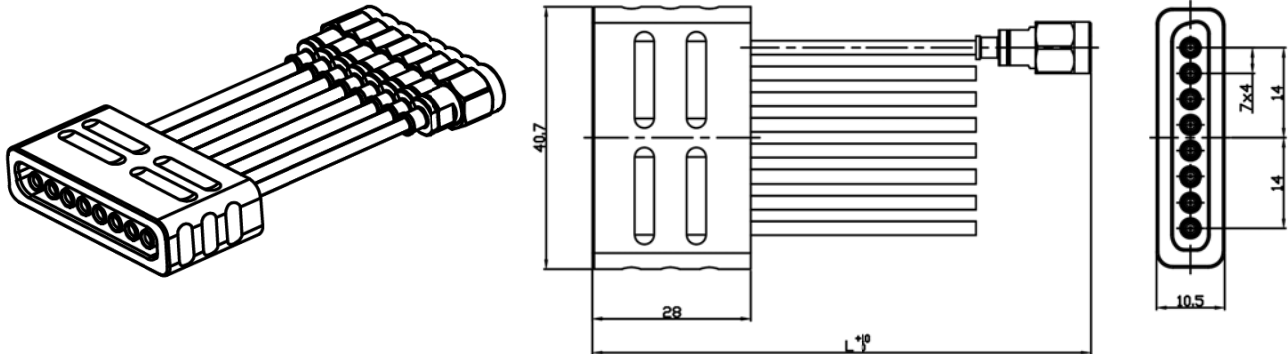

### Configuration

Connector 1 Type	GPPO Female
Connector 2 Type	2.92mm Male
Connector Body	Aluminium Alloy/Anodizing
Cable Type	Low Loss Stable Phase(Internal connection)
Cable Diameter	2.65mm

### Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 40GHz
Return Loss	≥14dB, DC to 40GHz
Insertion Loss	≤5.8/1000*L+0.5dB, DC to 40GHz
Phase Mating	±2ps

### Mechanical Properties

Mechanical Life	500 cycles
Mating Force (Per single channel)	3.5N Max.
Demating Force (Per single channel)	3.5N Max.

### Environment Data

Working Temperature	-40℃ ~ +85℃
---------------------	-------------

### Order Information

Dloorplf P/N	Dloorplf Description
RCHS-SD08-015S-4NC	Multi-coaxial Cable Assembly,GPPO(Female)breakoutto 2.92(male),1x8, 2.65mm,length 15cm
RCHS-SD08-030S-4NC	Multi-coaxial Cable Assembly,GPPO(Female) breakout to 2.92(male),1x8, 2.65mm,length 30cm
RCHS-SD08-xxxS-4NC	Multi-coaxial Cable Assembly,GPPO(Female) breakout to 2.92(male),1x8, 2.65mm,length xxxcm