


# Multi-coaxial Cable Assembly Datasheet



## RCM7-SD08-xxxS-6NA

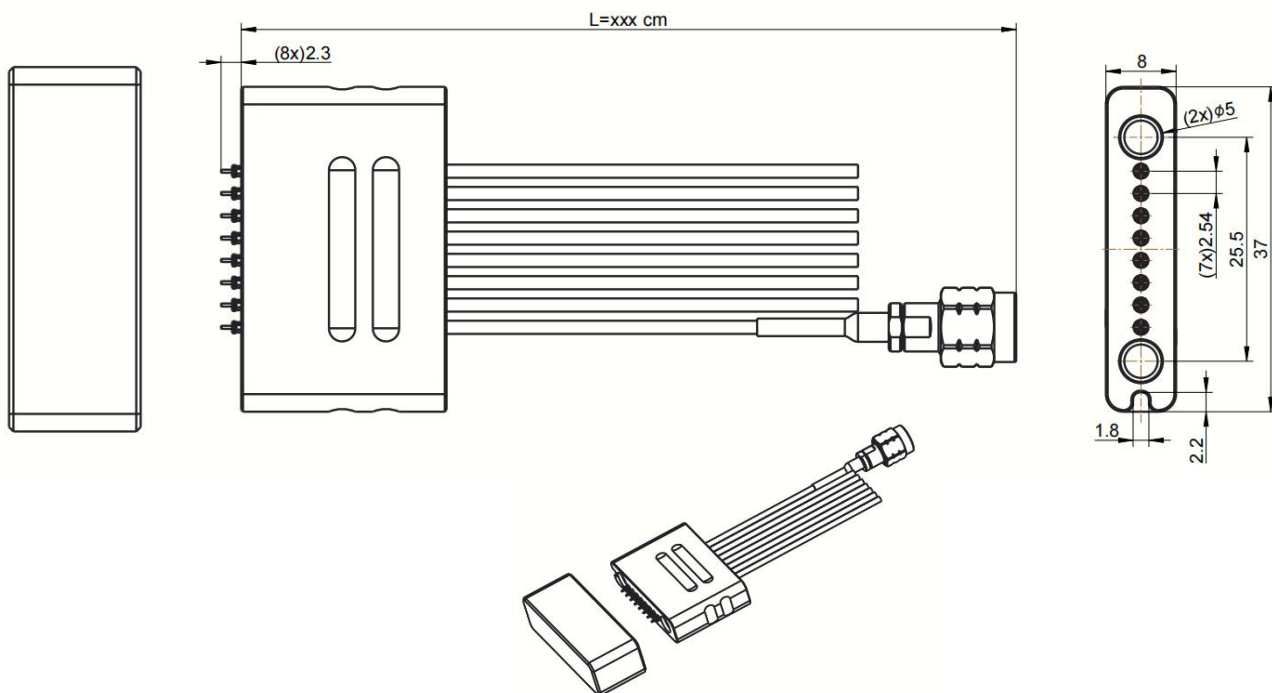

### Configuration

Connector 1 Type	SLC70 Male, acc.to Dloorplf internal interface
Connector 2 Type	1.85mm Male
Connector Body1	Aluminum Alloy/Anodizing
Connector Body2	Stainless steel (SUS303), Passivation
Cable Type	Low Loss Stable Phase
Cable Diameter	1.6mm

### Electrical Characteristics

Impedance	50Ω
Frequency Range	DC to 67GHz
Return Loss	TBD
Insertion Loss	≤0.12dB/cm x Length (cm)+1.6dB, DC to 67GHz
Phase Mating	±2ps

### Mechanical Properties

Mechanical Life	SLC70 Male 500 cycles; 1.85 Male 500 cycles
-----------------	---

### Environment Data

Working Temperature	-40℃ to +125℃
---------------------	---------------

CONTACT US  
 sales@dloorplf.com  
 http://www.dloorplf.com  
 KUNSHAN DLOORPLF ELECTRONIC TECHNOLOGY CO., LTD



昆山德普福电子科技有限公司  
 KUNSHAN DLOORPLF ELECTRONIC TECHNOLOGY CO., LTD

# Multi-coaxial Cable Assembly Datasheet



## Order Information

Dloorplf P/N	Dloorplf Description
RCM7-SD08-015S-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to 1.85(M), 1x8, DC to 67GHz, length 15cm
RCM7-SD08-030S-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to 1.85(M), 1x8, DC to 67GHz, length 30cm
RCM7-SD08-xxxS-6NA	Multi-coaxial Cable Assembly, SLC70(M) breakout to 1.85(M), 1x8, DC to 67GHz, length xxx cm

