

# 产品. 规格书

## PRODUCT SPECIFICATION

产品名称

Product Name

RGB满天星

产品编号

Product Number

LY-RGB-11

规格

Parameter

93.28\*54.97\*83.84\*40

东莞市蓝宇激光有限公司

Dongguan Blueuniverse Laser Co., Ltd

DESCRIPTION. :

(规格书)

SPECIFICATION

THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co., Ltd  
AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE  
MANUFACTURE OR SELL  
OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

Model No. :

日期

制定

品管

审核

核准

Document No. :


REV

LY-WI-RD-F0316



A0

# 光电参数

## PHOTOELECTRIC PARAMETER


| 项 目<br>Item  | 参 数<br>parameter     | 示 意 图<br>Schematic diagram  |
|--|----------------------|---|
| 外形尺寸:<br>Dimensions  | 93.28*54.97*83.84*40 |  |
| 输出功率:<br>Output Power  | >150mW               |   |
| 蓝光功率:<br>Blue light power  | >50mW                |   |
| 绿光功率:<br>Green power   | >45mW                |   |
| 红光功率:<br>Red light power   | >40mW                |   |
| 输入电压:<br>Input Voltage   | 12V                  |   |
| 输入电流:<br>Input Current   | >1000mA              |   |
| 贮存温度:<br>Storage Temperature   | - 40℃至85℃            |   |
| 工作温度:<br>Working Temperature   | - 10℃至60℃            |   |
| 工作时间:<br>Service Life  | >8000H               |   |
| 外壳极性:<br>The polarity of shell   | “ - ”                |   |
|  |                      |   |
|  |                      |   |
|  |                      |   |
| <b>东莞市蓝宇激光有限公司</b><br>Dongguan Blueuniverse Laser Co.,Ltd  |                      |   |
| THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co.,Ltd<br>AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL<br>OF APPARATUSES OR DEVICES WITHOUT PERMISSION. |                      | Model No. :<br><br>Document No. :<br>LY-WI-RD-F0316                                 |
|  |                      | REV<br>A0   |

# 外形尺寸 DIMENSIONS

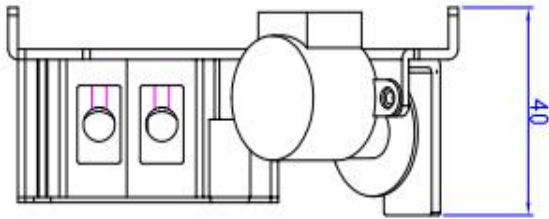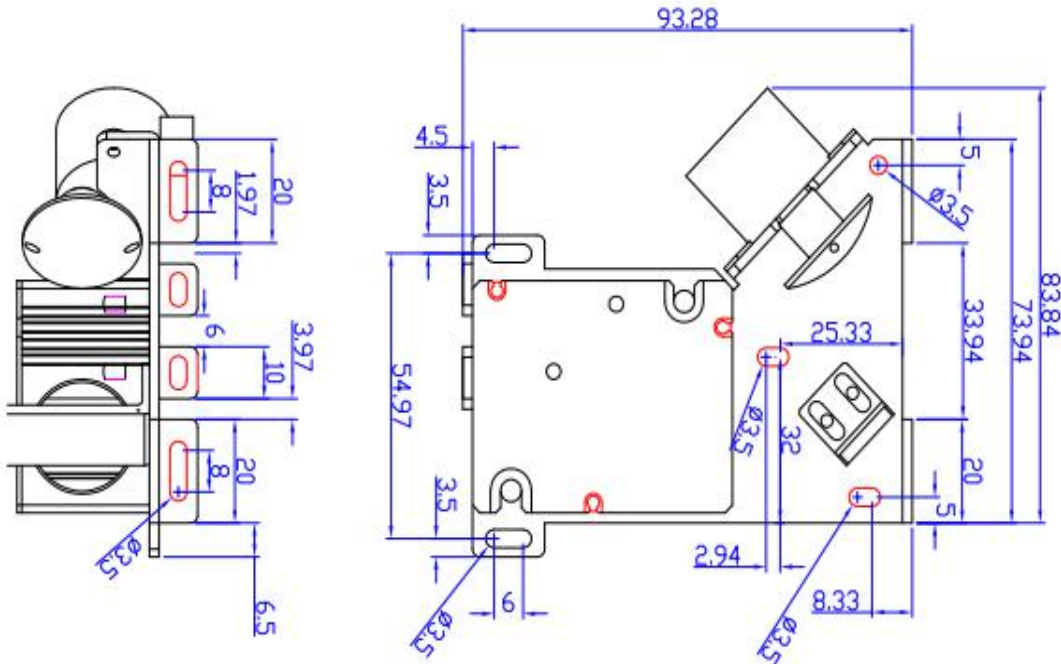

| UNSPECIFIED DIMENSIND TOL(GB/T1804-92)            |     |            |
|---|-----|------------|
| DIM   | TOL | COARSENESS |
| 0.5~3   |     | ±0.02      |
| 3~6   |     | ±0.05      |
| 6~30  |     | ±0.1       |
| 30~120  |     | ±0.2       |
| 120~400   |     | ±0.5       |
| UNSPECIFIED ANGLE TOL(GB11359-89-M) ±1°           |     |            |
| Form No: FR-04-0013 Revision: REV0 Date:2016-4-11 |     |            |

UNITS: MM



东莞市蓝宇激光有限公司  
Dongguan Blueuniverse Laser Co.,Ltd

DESCRIPTION. :  
(规格书)  
SPECIFICATION

THESE SPECIFICATION ARE THE PROPERTY OF DongGuan Blueuniverse Laser Co.,Ltd  
AND SHALL NOT BE REPRODUCED OR USED AS THE BASIS FOR THE MANUFACTURE OR SELL OF APPARATUSES OR DEVICES WITHOUT PERMISSION.

Model No. :

Document No. :  
LY-WI-RD-F0316

REV  
A0

# 遥控器使用说明

The instructions on the remote control

备注：开机默认20秒白光随后5秒开始转换

- 1.开/关机
- 2.单红
- 3.单绿
- 4.单蓝
- 5.红绿
- 6.红蓝
- 7.蓝绿
- 8.马达转速+
- 9.马达转速-
- 10.马达正转
- 11.马达反转
- 12.马达暂停/启

