


# ASG-DM1531

Dimming/ Standard Fixed Switch

## SPECIFICATION.

Symbolz	Parameter	Condition	Min	Type	Max	Unit
Vin	Input voltage range	50/60 HZ	100	110/220	240	VAC
Pi	Input power range			0.015		W
$\lambda$	Temperature of working environment	Working environment temperature is -15°C ~ +50°C	-15		50	°C
TA	Start time			$\leq 2$		mS
Ton	Quiescent current	Hibernation	0.015	0.012	0.01	uA
IRC	Working current		0.015	0.08	0.01	mA
IRC	Radiated power		15	25	30	mW
Radiation	Launch distance	Receiver sensitivity 108dB open straight line distance	30	50	200	m
Distance	Launch rate			10		KB/S
Rate	RF deviation	Narrowband emission		(+/-7.5)		KHZ
Frequency offset	Working Frequency		433.82	433.92	434.02	MHZ
Fc	Modulation mode GASK					
Modulation	Number of keys			2		key

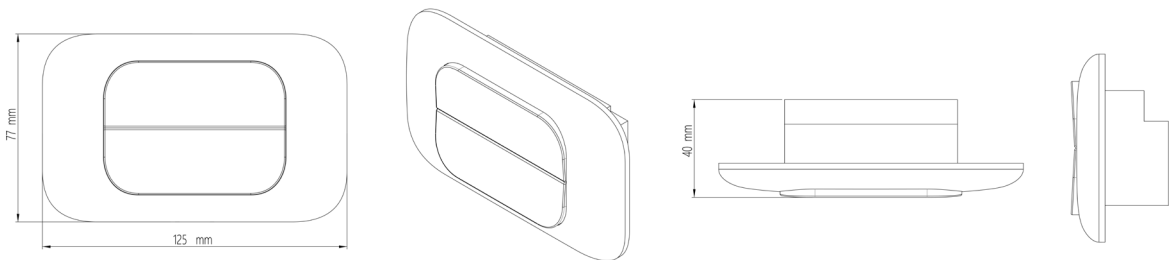

Accessories

## RELATIVE STANDARDS.

Safety Standards	IEC 61347-2-13:2006 IEC 61347-1:2007+A1:2010+A2:2012 EN 61347-2-13:2006 EN 61347-1:2008+A1:2011+A2:2013 EN 62493:2010
EMI/EMC Standards	IEC 61547:2009+IS1:2013 EC 61000-3-2:2006+A1:2008+A2:2009 EN 55015:2006+A1:2007+A2:2009 EN 61547:2009 EN 61000-3-2:2006+A1:2009+A2:2009 EN 61000-3-3:2008 IEC 61000-3-3:2008 CISPR 15:2011




Stop troubling the position of the light switch. Combine perfectly between switch and remote controller allow them able to use at same time. Let the remote control stay into your life.

# ASG-DM1532

Dimming/ Standard Switch

## SPECIFICATION.

Symbolz	Parameter	Condition	Min	Type	Max	Unit
Vin	Input voltage range	50/60 HZ	100	110/220	240	VAC
Pi	Input power range			0.015		W
$\lambda$	Temperature of working environment	Working environment temperature is -15°C ~ +50°C	-15		50	°C
TA	Start time			$\leq 2$		mS
Ton	Quiescent current	Hibernation	0.015	0.012	0.01	uA
IRC	Working current		0.015	0.08	0.01	mA
IRC	Radiated power		15	25	30	mW
Radiation	Launch distance	Receiver sensitivity 108dB open straight line distance	30	50	200	m
Distance	Launch rate			10		KB/S
Rate	RF deviation	Narrowband emission		(+/-7.5)		KHZ
Frequency offset	Working Frequency		433.82	433.92	434.02	MHZ
Fc	Modulation mode GASK					
Modulation	Number of keys			4		key

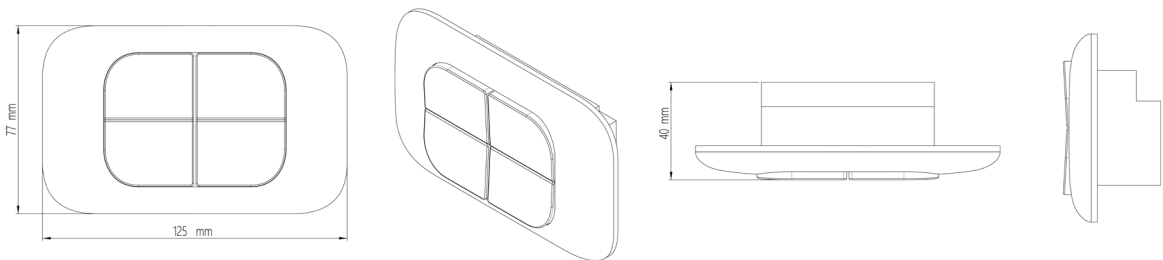

## RELATIVE STANDARDS.

Safety Standards	IEC 61347-2-13:2006
	IEC 61347-1:2007+A1:2010+A2:2012
	EN 61347-2-13:2006
	EN 61347-1:2008+A1:2011+A2:2013
EMI/EMC Standards	EN 62493:2010
	IEC 61547:2009+IS1:2013
	EC 61000-3-2:2006+A1:2008+A2:2009
	EN 55015:2006+A1:2007+A2:2009
	EN 61547:2009
	EN 61000-3-2:2006+A1:2009+A2:2009
	EN 61000-3-3:2008
	IEC 61000-3-3:2008
CISPR 15:2011	



Do not miss the dimming lighting and remote control when decoration a new home. Starting using the best remote dimming product. What a comfortable life.