




Outline Drawing

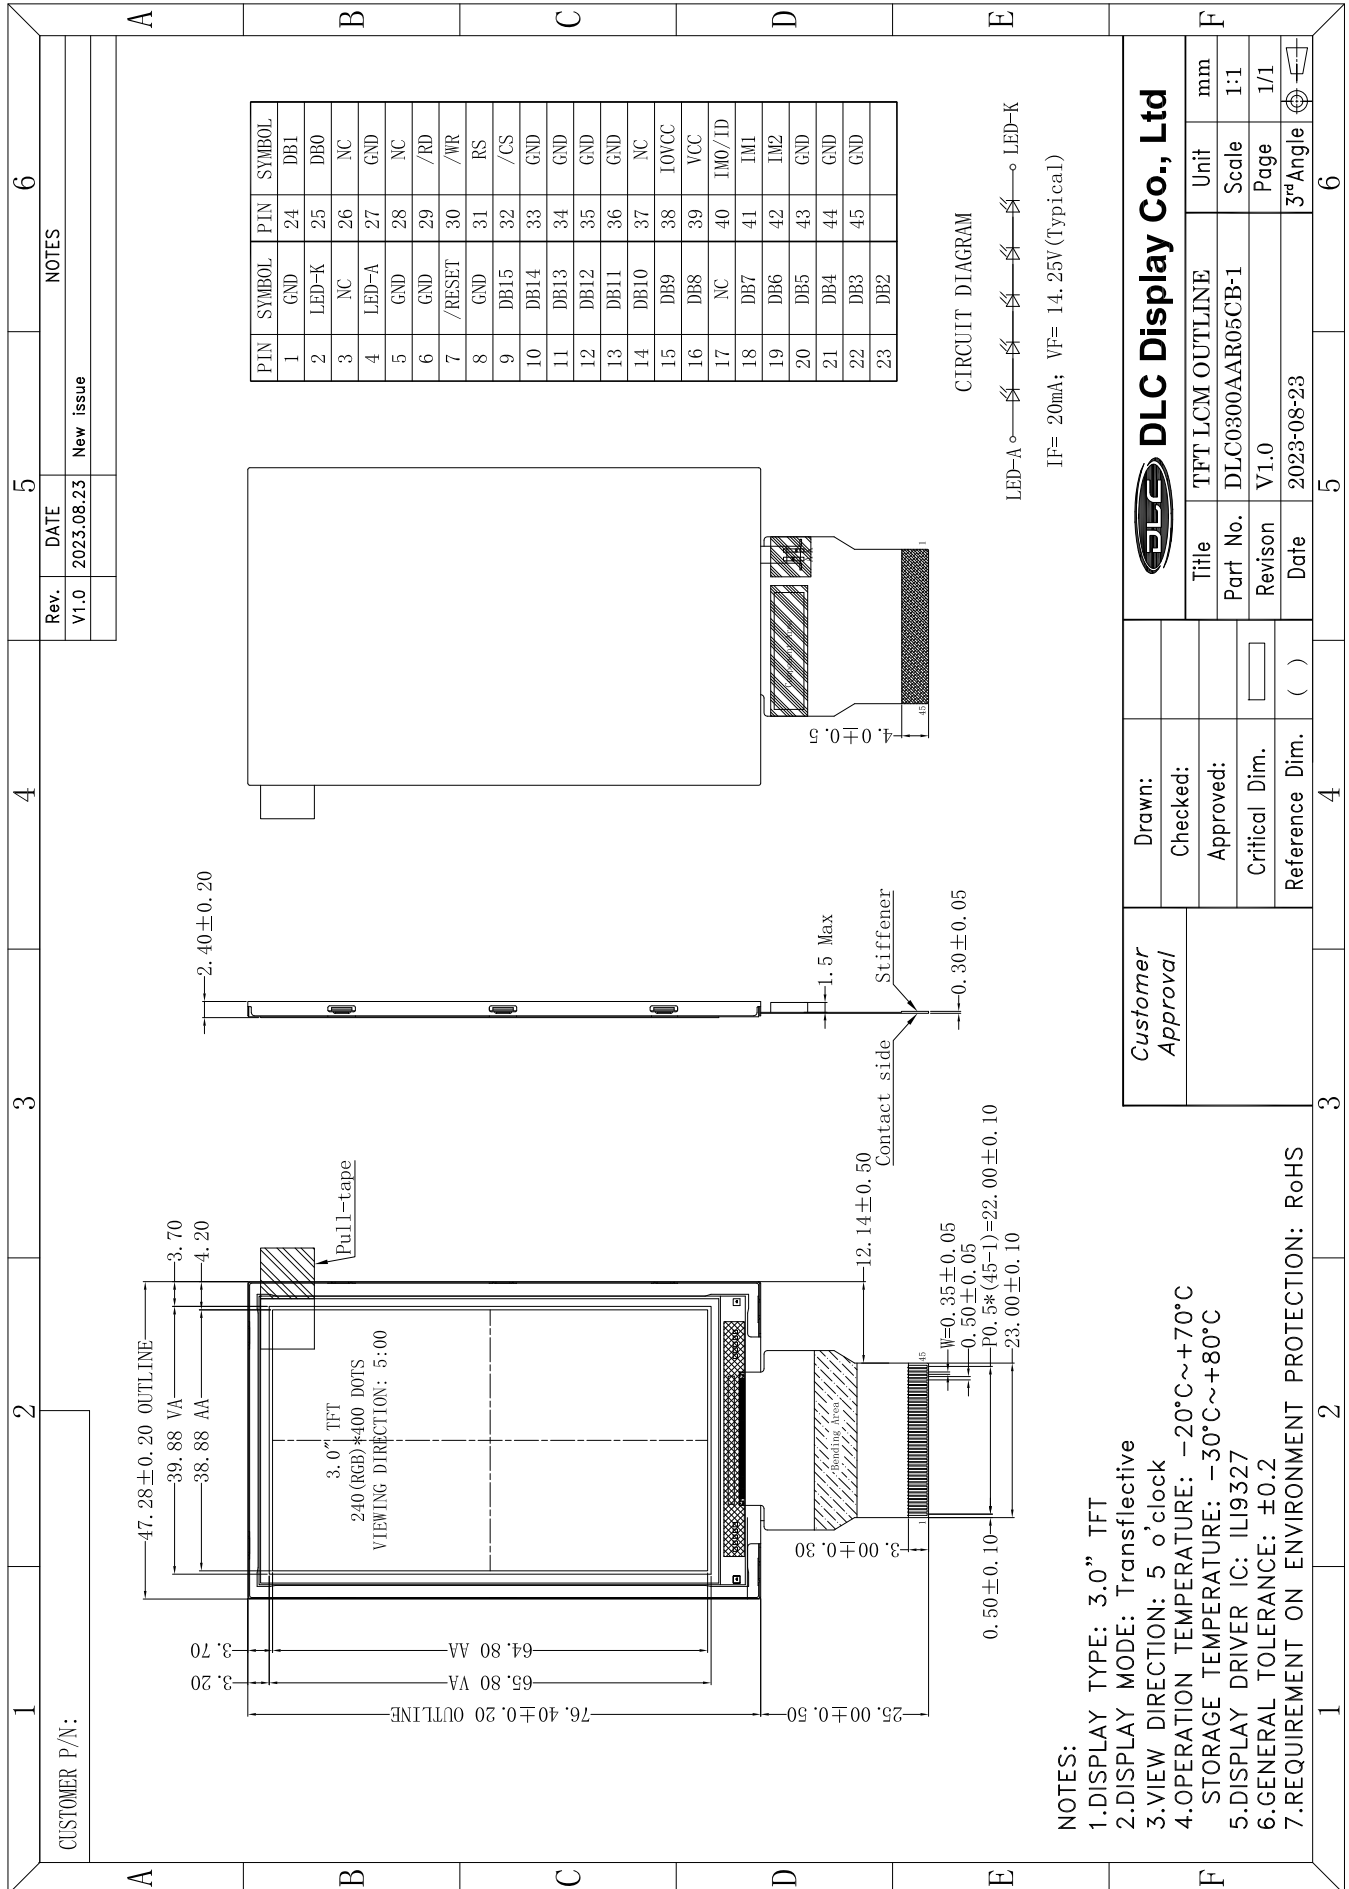

PIN	SYMBOL	PIN	SYMBOL
1	GND	24	DB1
2	LED-K	25	DB0
3	NC	26	NC
4	LED-A	27	GND
5	GND	28	NC
6	GND	29	/RD
7	/RESET	30	/WR
8	GND	31	RS
9	DB15	32	/CS
10	DB14	33	GND
11	DB13	34	GND
12	DB12	35	GND
13	DB11	36	GND
14	DB10	37	NC
15	DB9	38	IOVCC
16	DB8	39	VCC
17	NC	40	IM0/ID
18	DB7	41	IM1
19	DB6	42	IM2
20	DB5	43	GND
21	DB4	44	GND
22	DB3	45	GND
23	DB2		

CIRCUIT DIAGRAM



IF= 20mA; VF= 14.25V(Typical)

NOTES:

- 1.DISPLAY TYPE: 3.0" TFT
- 2.DISPLAY MODE: Transflective
- 3.VIEW DIRECTION: 5 o'clock
- 4.OPERATION TEMPERATURE: -20°C~+70°C
- 5.STORAGE TEMPERATURE: -30°C~+80°C
- 6.DISPLAY DRIVER IC: ILI9327
- 7.GENERAL TOLERANCE: ±0.2
- 7.REQUIREMENT ON ENVIRONMENT PROTECTION: RoHS

Customer Approval		DLC Display Co., Ltd	
Drawn:		Title	TFT LCM OUTLINE
Checked:		Part No.	DLC0300AAR05CB-1
Approved:		Revision	V1.0
Critical Dim.		Date	2023-08-23
Reference Dim.	()	Unit	mm
		Scale	1:1
		Page	1/1
		3° Angle	