Outline Drawing

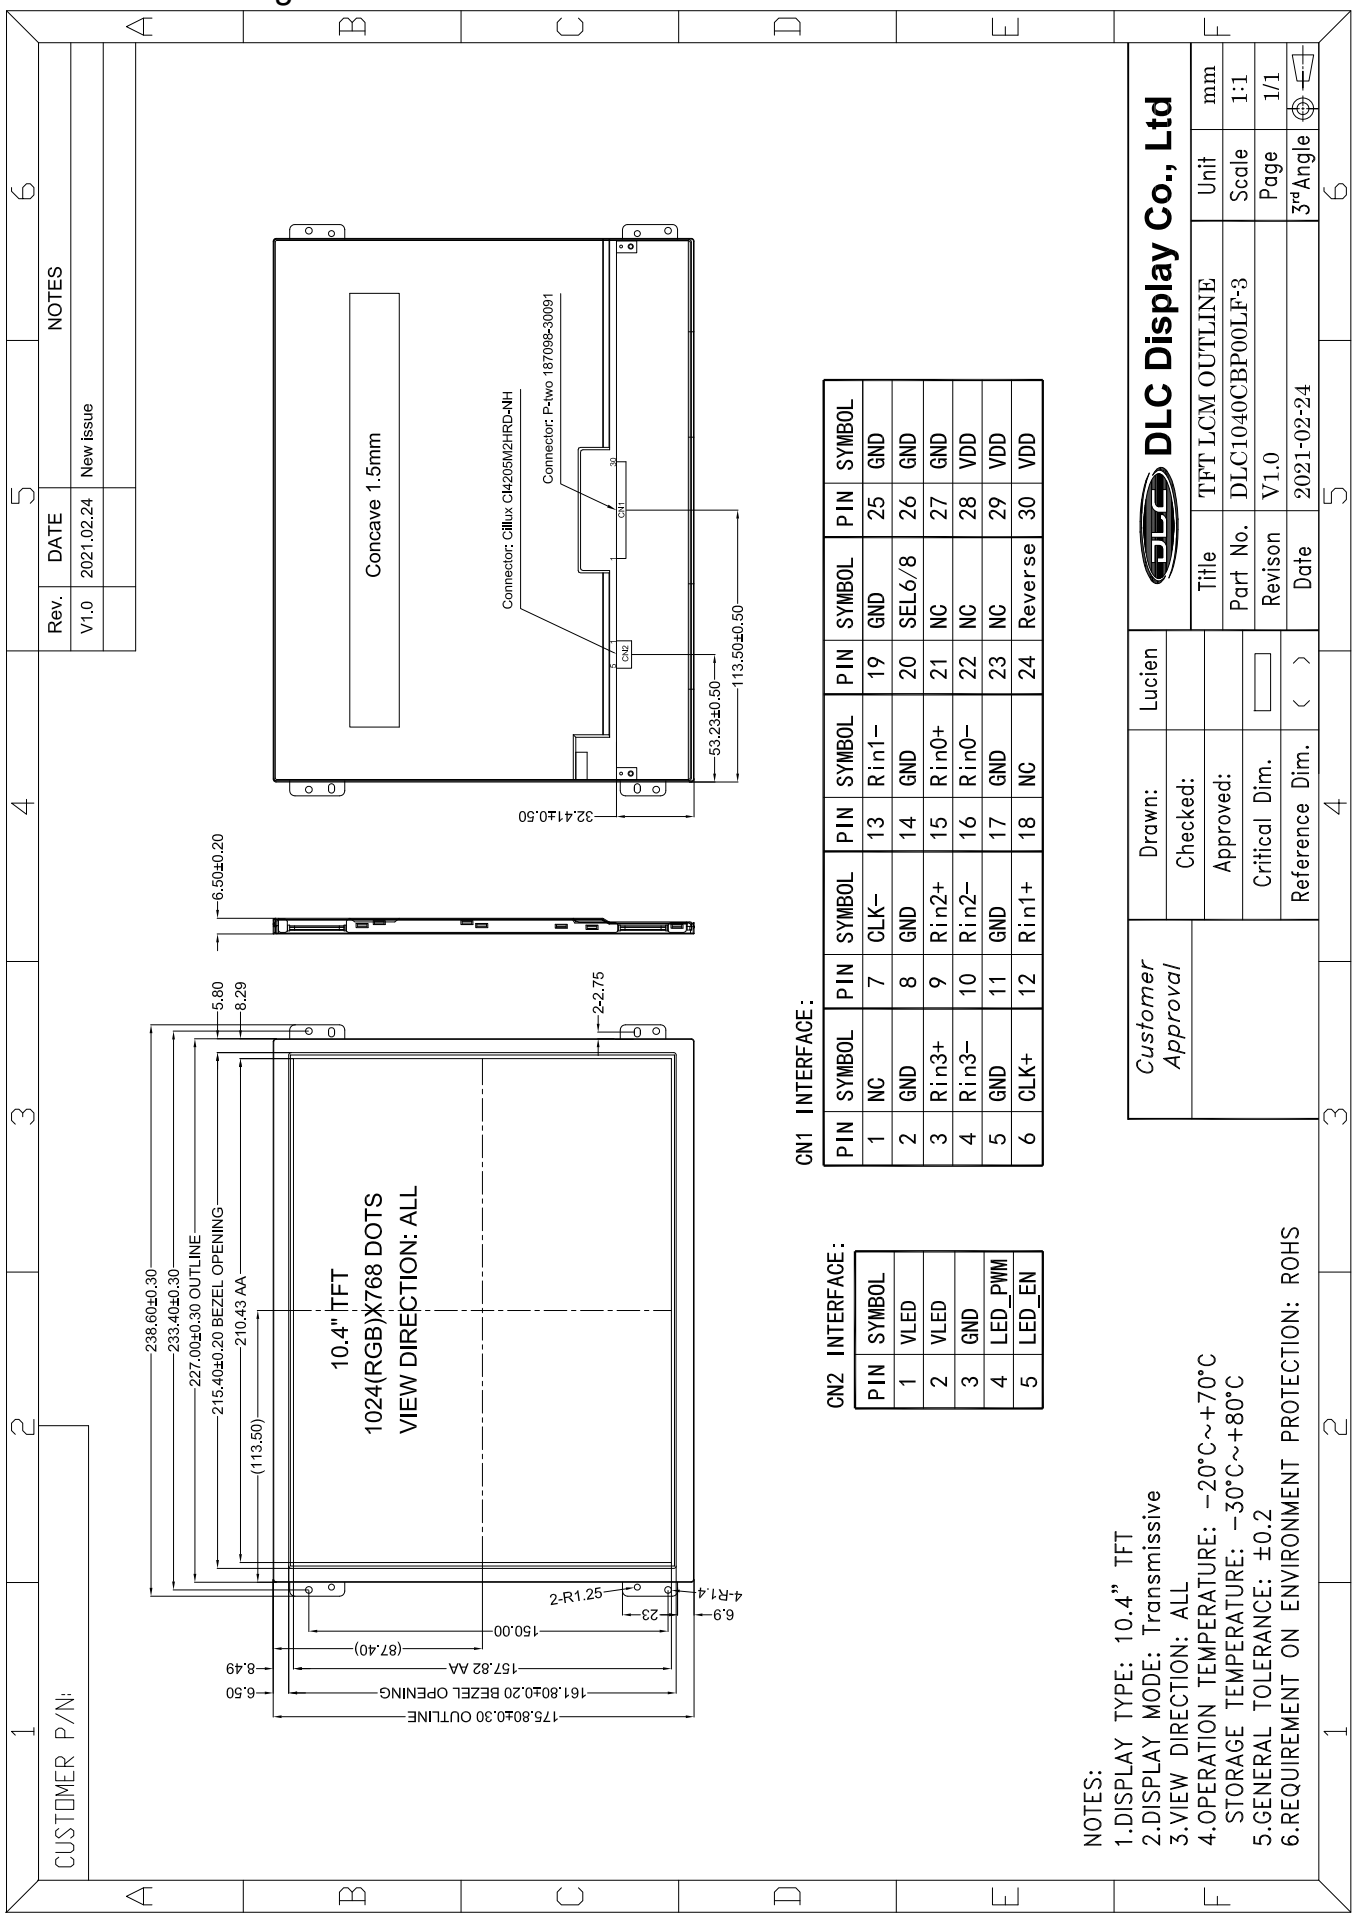

CN1 INTERFACE:

PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL	PIN	SYMBOL
1	NC	7	CLK−	13	Rin1−	19	GND
2	GND	8	GND	14	GND	20	SEL6/8
3	Rin3+	9	Rin2+	15	Rin0+	21	NC
4	Rin3−	10	Rin2−	16	Rin0−	22	NC
5	GND	11	GND	17	GND	23	NC
6	CLK+	12	Rin1+	18	NC	24	Reverse

PIN	SYMBOL
25	GND
26	GND
27	GND
28	VDD
29	VDD
30	VDD

CN2 INTERFACE:

PIN	SYMBOL
1	VLED
2	VLED
3	GND
4	LED_PWM
5	LED_EN

NOTES:
1.DISPLAY TYPE: 10.4" TFT
2.DISPLAY MODE: Transmissive
3.VIEW DIRECTION: ALL
4.OPERATION TEMPERATURE: −20°C~+70°C
STORAGE TEMPERATURE: −30°C~+80°C
5.GENERAL TOLERANCE: ±0.2
6.REQUIREMENT ON ENVIRONMENT PROTECTION: ROHS