Outline Drawing

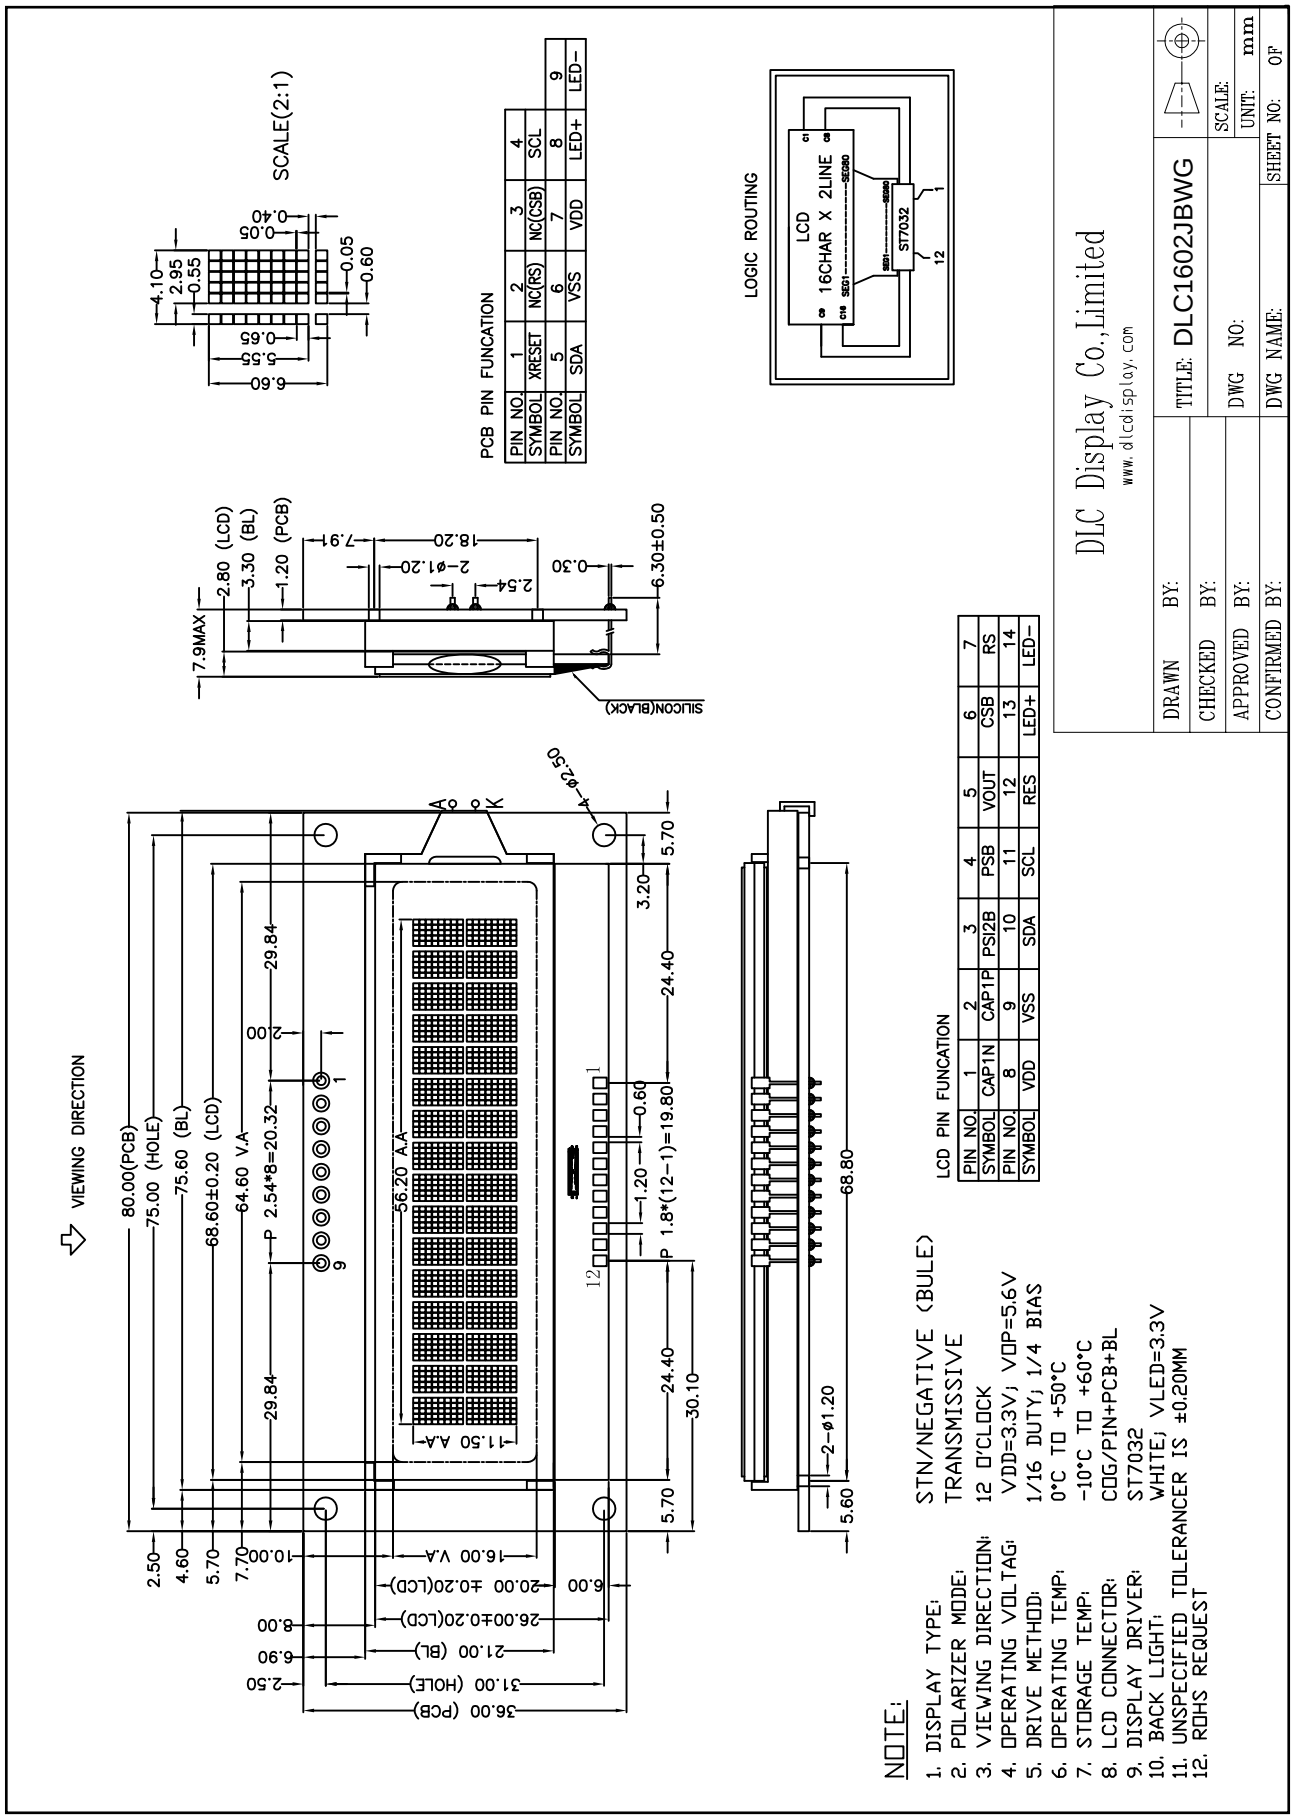

NOTE:

1. DISPLAY TYPE: STN/NEGATIVE (BULE)
2. POLARIZER MODE: TRANSMISSIVE
3. VIEWING DIRECTION: 12 O'CLOCK
4. OPERATING VOLTAG: VDD=3.3V; VDP=5.6V
5. DRIVE METHOD: 1/16 DUTY; 1/4 BIAS
6. OPERATING TEMP: 0°C TO +50°C
7. STORAGE TEMP: -10°C TO +60°C
8. LCD CONNECTOR: COG/PIN+PCB+BL
9. DISPLAY DRIVER: ST7032
10. BACK LIGHT: WHITE; VLED=3.3V
11. UNSPECIFIED TOLERANCER IS ±0.20MM
12. ROHS REQUEST