



FPC1 PIN

PIN	NAME
1	VSS
2	VDD
3	D0
4	D1
5	D2
6	D3
7	XCK
8	D. OFF
9	LP
10	FR
11	V3
12	V2
13	V0

FPC2 PIN

PIN	NAME
1	VSS
2	VDD
3	D. OFF
4	EIO1
5	FR
6	V4
7	V1
8	V0

LED CIRCUIT DIAGRAM:

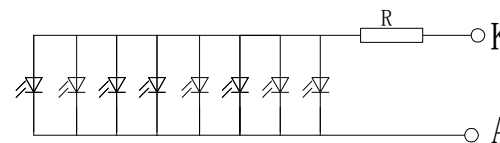

DOTS SIZE
SCALE 40:1

NOTE:

- 1 DISPLAY TYPE : STN/Blue
- 2 VIEWING DIRECTION: 6 O'CLOCK
- 3 POLARIZER MODE: TRANSMISSIVE/NEGATIVE
- 4 DRIVE METHOD : 1/240 DUTY 1/16 BIAS
- 5 DRIVER : NT7711&NT7712
- 6 OPERATING VOLTAGE: 21.0V
- 7 BACKLIGHT:LED(White: 8 DIES) Vf=(3.2±0.3)V If=120mA
- 8 OPERATING TEMP : -20°C--+70°C
- 9 STORAGE TEMP : -30°C--+80°C
- 10 UNSPECIFIED TOLERANCE ±0.3
11. RoHs Complicant

DLC Display Co., Limited

www.dlcdisplay.com

DRAWN BY:	TITLE: DLC320240CBWG-1	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	