




Product features

- HEBE F.392 series Flood Light ,which adopts new concept design and hidden screw design. Surface is concise ,clean and simple that brings new visual impact to users;
- Brand LED chip design ,max 180W ,super energy-saving advantage , ultra high efficiency ,max 100lm/w achievable;
- Integrated dual-cavity design for both power supply and light source components are not only for easy to replace but also the heat inside will not interfere each other ,meanwhile , so the sealing performance is ,which can prolong the lifespan;
- The wide open thermal structure design has significant heat dissipation effect and the fish-fin design framework will prevent the dust ,leaves and rainwater accumulating ,furthermore ,the rainwater can be drained from any direction smoothly;
- High light transmittance ultra-white toughed glass ,light transmittance up to 92%;
- Lamp body is with 500 hours anti-salt spray corrosion spraying treatment ,which can effectively resist UV and harsh environment corrosion ,also makes it as an excellent outdoor lighting products;
- The whole lamp is with IP 66 waterproof and dust-proof design(No glue) and IK 08 protective design;
- The bracket adopts gear type bite design and the angle adjustment is accurate ; The lamp body can be totated $\pm 90^\circ$,meeting various applications requirements;
- Multiple mounting options: Bracket mounting ,Pole mounting ,Ground buried mounting ,Ground plug-in mounting and hoop mounting;
- Widely used in medium and low pole lighting ,building facade ,squares ,stage ,park ,community and other places.

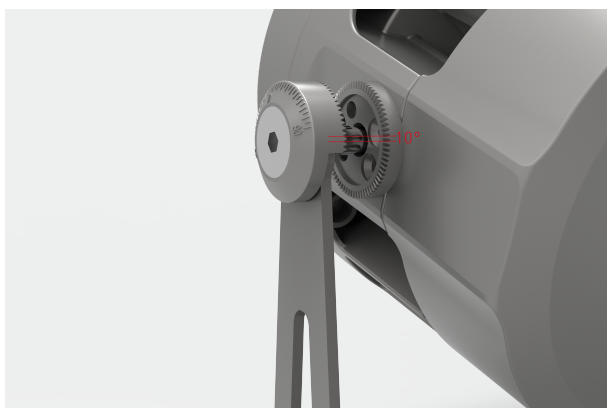

Precisely Adjust

Each gear for 10 degree more precise direction adjustment

Water-Drain Hole Design

Water Drain from any direction without obstacle




Model	F.394A.10.0068	F.394A.10.0150	F.394A.10.0100	F.394A.10.0120	F.394A.10.0150	F.394A.10.0180	F.394A.10.0075
Rated Power	68W	150W	100W	120W	150W	180W	75W
LED Type	3535	3535	3535	3535	3535	3535	3535
LED QTY	30	30	40	48	60	72	30
CRI	CRI ≥70	CRI ≥70	CRI ≥70	CRI ≥70	CRI ≥70	CRI ≥70	CRI ≥70
PF	≥0.9	≥0.9	≥0.9	≥0.9	≥0.9	≥0.9	≥0.9
CCT	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K	3000K/4000K/5000K
Beam Angle	3.5°	6.5°	10°/25°/40°/60°	10°/25°/40°/60°	10°/25°/40°/60°	10°/25°/40°/60°	6.5°
Dimension	L308*W247*H339mm		L308*W247*H339mm	L308*W247*H339mm			L308*W247*H339mm
Weight	10.2KG		10.2KG	10.2KG			10.2KG
Input Voltage	AC176V~265V 50~60Hz		AC176V~265V 50~60Hz	AC176V~265V 50~60Hz			AC176V~265V 50~60Hz
THD	MAX 20%		MAX 20%	MAX 20%			MAX 20%
Control Mode	Single color ON/OFF		Single color ON/OFF,RGBW	Single color ON/OFF,RGB,RGBW			RGB
Material	Die-casting Aluminum		Die-casting Aluminum	Die-casting Aluminum			Die-casting Aluminum
Lifespan	50000H		50000H	50000H			50000H
Ambient Temperature	-20°C~40°C		-20°C~40°C	-20°C~40°C			-20°C~40°C
Ambient humidity	10%~95%RH		10%~95%RH	10%~95%RH			10%~95%RH
Security Level	CLASS I		CLASS I	CLASS I			CLASS I
Ingress Protection	IP66,IK08		IP66,IK08	IP66,IK08			IP66,IK08

Light Color Model Luminous Flux (lm)	3000K (Single color ON/OFF)	4000K (Single color ON/OFF)	5000K (Single color ON/OFF)	RGB	RGBW
F.394A.10.0068.003	4396	5433	5746	/	/
F.394A.10.00150.006	12122	14993	15844	/	/
F.394A.10.0100.010	6293	7783	8225	/	4464
F.394A.10.0100.025	6209	7679	8115	/	4407
F.394A.10.0100.040	5298	6553	6925	/	5437
F.394A.10.0100.060	6575	8132	8593	/	4636
F.394A.10.0120.010	7551	9339	9869	3635	5358
F.394A.10.0120.025	7450	9215	9738	3589	5289
F.394A.10.0120.040	6357	7863	8309	4427	4533
F.394A.10.0120.060	7889	9758	10312	3777	5564
F.394A.10.0150.010	9439	11674	12336	4544	6697
F.394A.10.0150.025	9313	11519	12173	4486	6611
F.394A.10.0150.040	7947	9829	10387	5534	5667
F.394A.10.0150.060	9862	12198	12890	4721	6954
F.394A.10.0180.010	11326	14009	14804	5453	8036
F.394A.10.0180.025	11176	13823	14607	5383	7933
F.394A.10.0180.040	9536	11795	12464	6640	6800
F.394A.10.0180.060	11834	14637	15467	5665	8345
F.394A.10.0075.006	/	/	/	2913	/


F.394A.10.0068.003.W4.02

H(m)	D(m)	Eav(lx)	Ecen(lx)
8.0	0.47	5332	5866
16.0	0.94	1471	1476
24.0	1.40	657	659
32.0	1.87	369	371
40.0	2.34	236	237
48.0	2.81	164	165




F.394A.10.0150.006.W4.02

H(m)	D(m)	Eav(lx)	Ecen(lx)
8.0	0.78	9906	9836
16.0	1.56	2477	2459
24.0	2.34	1101	1094
32.0	3.12	620	615
40.0	3.90	396	393
48.0	4.68	275	273




F.394A.10.0100.010.W4.02

H(m)	D(m)	Eav(lx)	Ecen(lx)
4.0	0.63	4921	6307
8.0	1.26	1230	1577
12.0	1.89	547	701
16.0	2.52	308	394
20.0	3.15	197	252
24.0	3.78	137	175




F.394A.10.0100.025.W4.02

H(m)	D(m)	Eav(lx)	Ecen(lx)
4.0	1.7	1061	1454
8.0	3.4	265	364
12.0	5.1	118	162
16.0	6.8	66	91
20.0	8.5	42	58
24.0	10.2	29	40




F.394A.10.0100.040.W4.02

H(m)	D(m)	Eav(lx)	Ecen(lx)
4.0	2.14	875	1284
8.0	4.28	219	321
12.0	6.42	97	143
16.0	8.56	55	80
20.0	10.70	35	51
24.0	12.84	24	36




F.394A.10.0100.060.W4.02


H(m)	D(m)	Eav(lx)	Ecen(lx)
4.0	4.08	305	563
8.0	8.16	76	141
12.0	12.24	34	63
16.0	16.32	19	35
20.0	20.40	12	23
24.0	24.48	8	16



Unit: mm

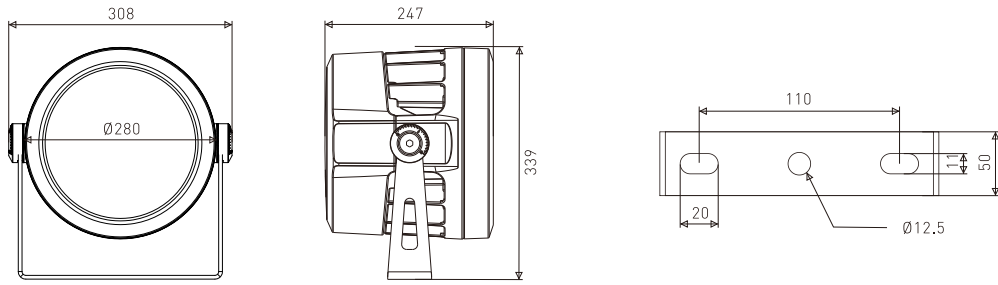

1. Drilling 2 holes on the mounting surface, it is recommended to install and fix with M12x80 expansion screws. According to the installation position, select different fixing methods as shown below
 2. After fixing the lamp, then adjust the illumination angle, which can be slightly adjusted as pictures shown below:
 3. Connecting the power cord: According to the different color of the power cord to differentiate the Null wire/ Live wire/ Ground wire.
- Attention: It is recommended that the professional electrician installs the lamp to avoid the danger of electric shock.

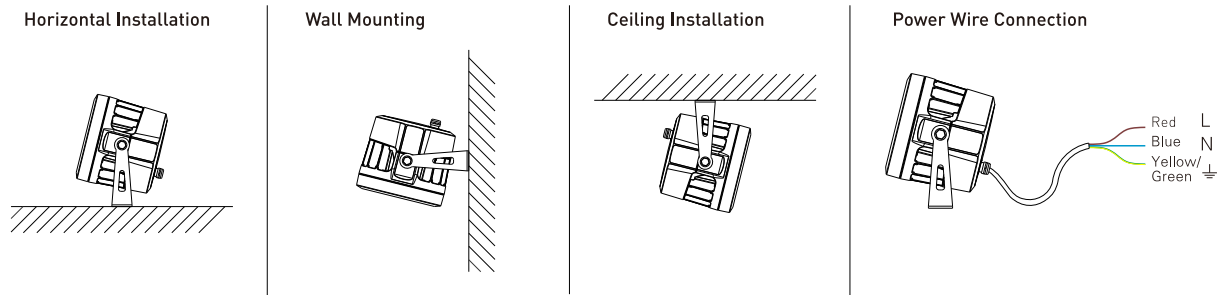


Encoding Rule Example: F.394A.10.0068.003.W3.02

Product Type	Product Code	Classification	Light Source	Rated Power	Beam angle	Light Color	Input Voltage
F: Flood light	394	A	10: LED	0068: 68W 0075: 75W 0100: 100W 0120: 120W 0150: 150W 0180: 180W	003: 3.5° 006: 6.5° 010: 10° 015: 15° 025: 25° 040: 40° 060: 60°	W3: 3000K W4: 4000K W5: 5000K RGB RGBW	02: AC176V~265V

Accessories (Sold Separately) :




Angled Glare Shield



Honeycomb Glare Sheet

Color Options:



Changzhou Green Lighting Co., Ltd.

No.269 Fumin Rd, Economic Development Zone, Changzhou, China
 Tel: +86 519 88406000 88411399
 Fax: +86 519 88406100
 Email: green@china-greenlighting.com