

Description

The APO3605ADNA Over-Voltage Protection device features a very low R_{DS_ON} resistance, typical 48m Ω , internal nFET for USB VBUS line. The nFET switch ensures safe and right current flow in both charging and host modes such as OTG while protecting the internal system circuits from any over voltage conditions. Over-voltage threshold can be adjusted externally with a resistor divided network, or set internally by the built-in value.

The device features an open-drain output nACK, when $V_{IN_UVLO} < V_{IN} < V_{IN_OVLO}$ and the switch is on, nACK will be driven low to indicate a good power input, otherwise it is high impedance.

This device features over-temperature protection that prevents itself from thermal damaging. The device operates over a -40°C to +85°C ambient temperature range.

The APO3605ADNA is available in a RoHS and Green compliant DFN2x2-6L package.

Applications

- Mobile Handsets
- Tablets
- Wearable Devices
- Charging Ports


Features

- A Very Low R_{DS_ON} 48m Ω (typ.) n-Channel MOSFET
- Adjustable OVP Threshold from 4V to 20V
- Default Threshold Voltage
 - ◇ 6.0V for APO3605ADNA
- VBUS DC Input Voltage Range : 2.8V ~ 32V
- 4A Max Continuous Current Capability
- OTG Functionality on VBUS Path
- Active-low Switch Status Indicator Output
- DFN2x2-6L package


Device Comparison Table and Ordering Information

Part Number	Package	Operation Ambient Temperature	Shipping Option	Marking	V_{IN_OVLO}
APO3605ADNA	DFN-2x2-6L	-40°C ~ 85°C	3000/Tape & Reel	V35AXXXX	6.0V

Pin Configuration and Top Mark

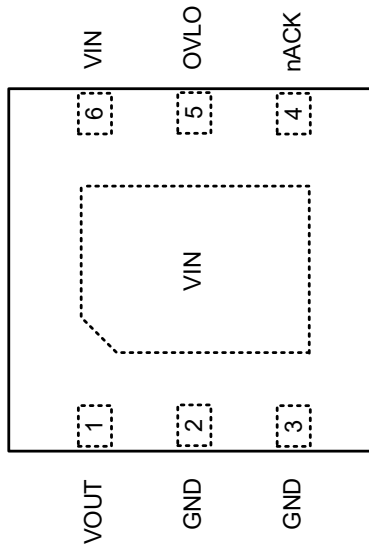

Top View

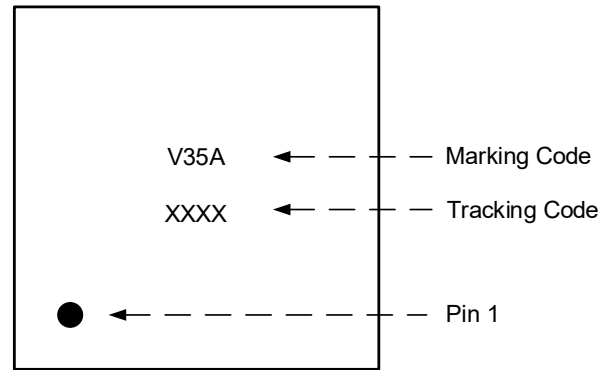


Top Mark


Pin Assignments

Pin	Name	Description
1	V_{OUT}	Output Voltage: bypass with a 0.1 μ F/35V ceramic capacitor as close to the device as possible. Capacitor breakdown voltage selected is depended on OVLO threshold set.
2	GND	Ground
3	GND	Ground
4	nACK	Open-Drain Active-Low Output : Active-low logic output. It needs an external pull-up resistor, e.g.10k Ω ~ 470 k Ω , to the System I/O. If not used, leave it open or tied to ground.
5	OVLO	OVP Threshold Adjustment : Connect the pin to ground to use a fixed internal threshold. Connect a resistor-divider to set a different threshold between 4V and 20V.
6	V_{IN}	Voltage Input: bypass with a 0.1 μ F/50V ceramic capacitor as close to the device as possible.
EP	V_{IN}	Voltage Input: Need to short to Pin 6 with wide metal trace.

Functional Block Diagram

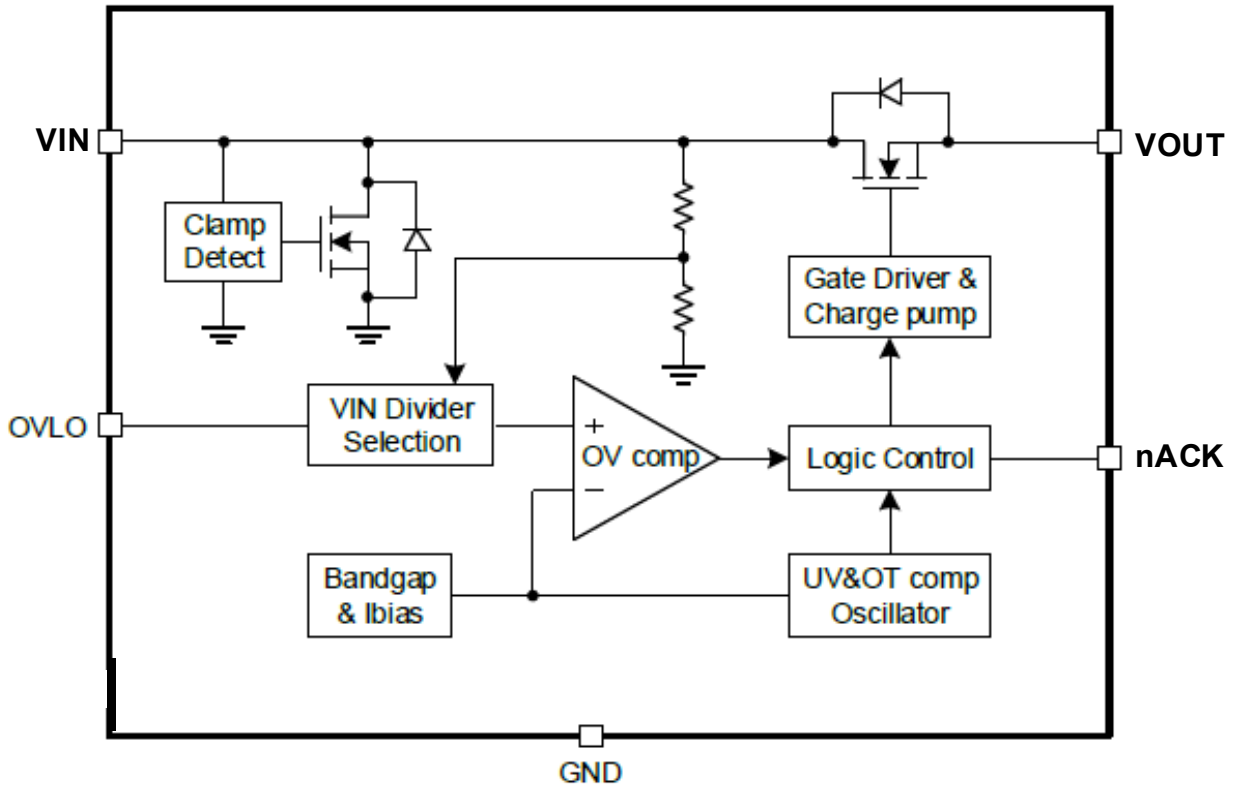

Typical Application Circuit

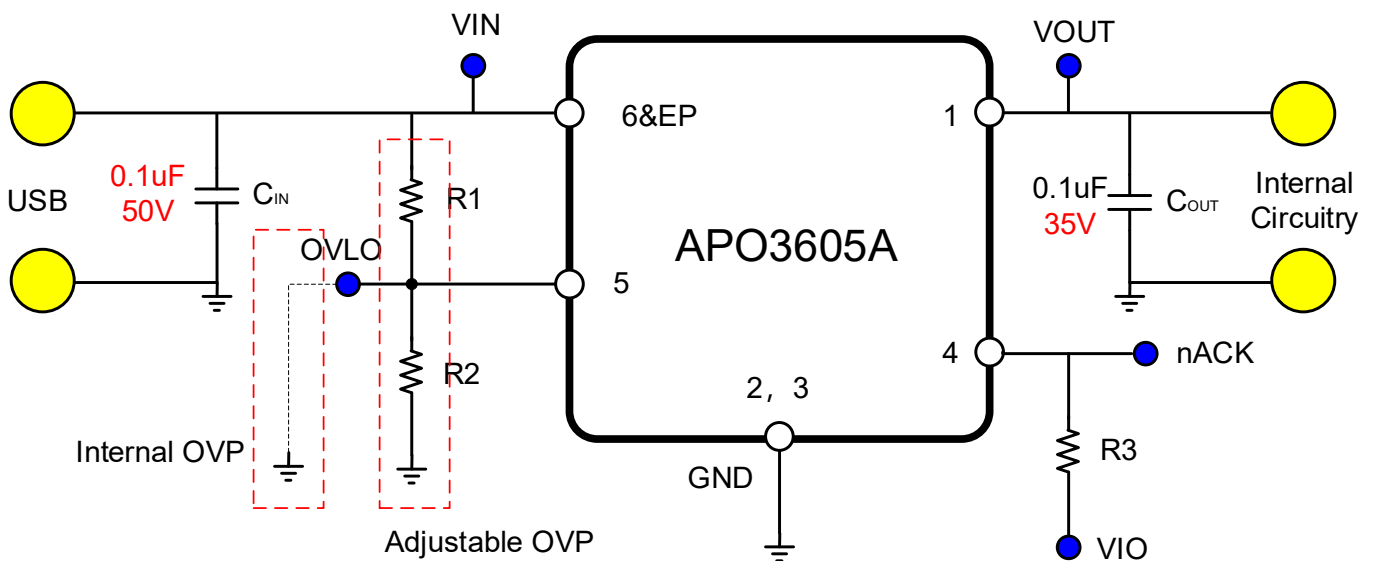

Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min	Max	Unit
Input DC voltage	V_{IN}	-0.3	36	V
Output voltage	V_{OUT}	-0.3	24	V
OVLO voltage	V_{OVLO}	-0.3	7	V
nACK voltage	V_{ACK}	-0.3	7	V
Switch current (Continuous current)	I_{IN}		4	A
Ambient temperature	T_A	-40	85	$^\circ\text{C}$
Junction temperature	T_J	-40	125	$^\circ\text{C}$
Storage temperature	T_{STG}	-55	150	$^\circ\text{C}$
Soldering temperature (At leads, 10 seconds)	T_{LEAD}		260	$^\circ\text{C}$

Thermal Information

Parameter	Symbol	Value	Unit
Thermal resistance from junction to ambient (In free air)	$R_{\theta JA}$	70	$^\circ\text{C/W}$

Operating Conditions

Parameter	Symbol	Min	Max	Unit
Input DC Voltage	V_{IN}	2.8	32	V
Input Capacitance	C_{IN}	0.1		μF
Output Load Capacitance	C_{OUT}	0.1	100	μF
Human Body Model	V_{ESD}	-2	2	kV
Charged Device Model		-500	500	V
Machine Model		-200	200	V
Latch-up	$I_{Latch-up}$	-200	200	mA
Contact discharge for IEC61000-4-2 standard	V_{IN_PORT}	-8	+8	KV
Air discharge for IEC61000-4-2 standard	V_{IN_PORT}	-15	+15	KV

Electrical Characteristics ($T_A = 25^\circ C$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Switch on resistance	R_{DS_ON}	$V_{IN} = 5V, I_{OUT} = 1A$		48		$m\Omega$
		$V_{IN} = 3.3V, I_{OUT} = 1A$		53		$m\Omega$
Input quiescent current	I_Q	$V_{IN} = 5V, V_{OVLO} = 0V, I_{OUT} = 0A$		105	130	μA
Input current at over-voltage condition	I_{IN_OVLO}	$V_{IN} = 5V, V_{OVLO} = 3V, V_{OUT} = 0V$		93	130	μA
OVLO set threshold	V_{OVLO_TH}		1.16	1.20	1.24	V
OVP threshold adjustable range	V_{OVLO_RNG}		4		20	V
External OVLO select threshold	V_{OVLO_SEL}	OVLO Rising	0.26	0.29	0.32	V
		Hysteresis		0.04		
OVLO pin leakage current	I_{OVLO}	$V_{OVLO} = V_{OVLO_TH}$	-0.1		0.1	μA

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit	
Protection							
OVP trip level	V_{IN_OVLO}	APO3605ADNA	V_{IN} rising	5.88	6.0	6.3	V
			Hysteresis		0.15		
UVLO trip level	V_{IN_UVLO}	V_{IN} rising			2.8	V	
		V_{IN} falling	2.2				
Shutdown temperature	T_{SDN}			140		$^\circ\text{C}$	
Shutdown temperature Hysteresis	T_{SDN_HYS}			30		$^\circ\text{C}$	

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Timing Characteristics						
Debounce time	t_{DEB}	From $V_{\text{IN}} > V_{\text{IN_UVLO}}$ to 10% V_{OUT}		23		ms
Switch turn-on time	t_{ON}	$R_{\text{OUT}} = 100\Omega$, $C_{\text{OUT}} = 0.1\mu\text{F}$, V_{OUT} from 10% V_{IN} to 90% V_{IN}		0.8		ms
Switch turn-off time	t_{OFF}	$R_{\text{OUT}} = 100\Omega$, $C_{\text{OUT}} = 0.1\mu\text{F}$, $V_{\text{IN}} > V_{\text{IN_UVLO}}$ to V_{OUT} stop rising, V_{IN} rise at $10\text{V}/\mu\text{s}$		90		ns

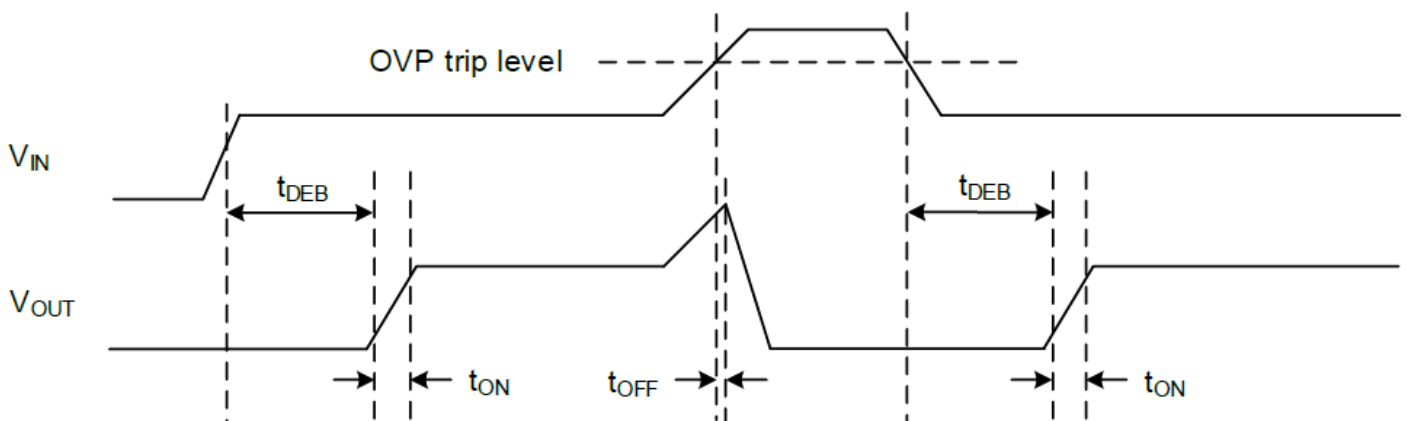Timing Diagram


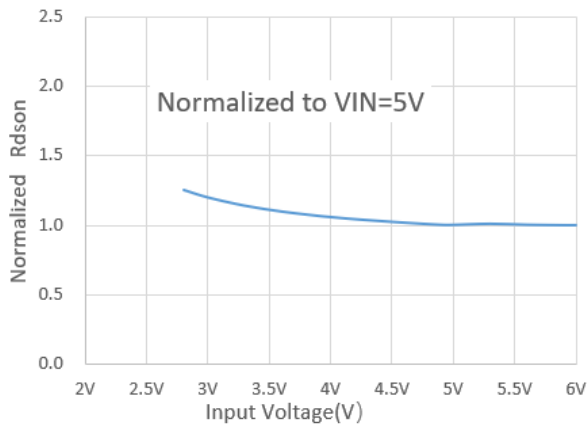
Typical Performance Characteristics ($V_{IN} = 5V$, $C_{IN} = C_{OUT} = 0.1\mu F$, $T_A = 25^\circ C$)

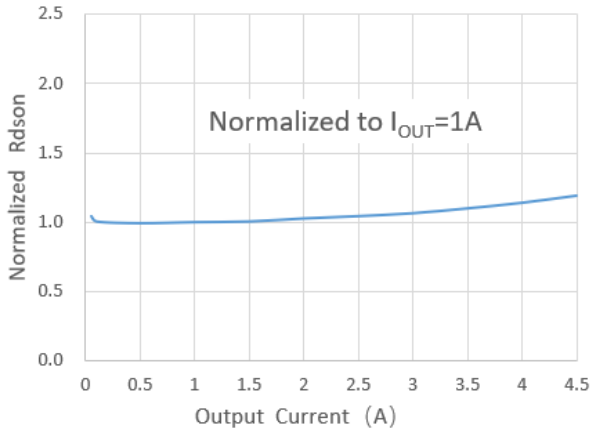


Normalized R_{DS_ON} vs Output Current. ($V_{IN}=5V$)

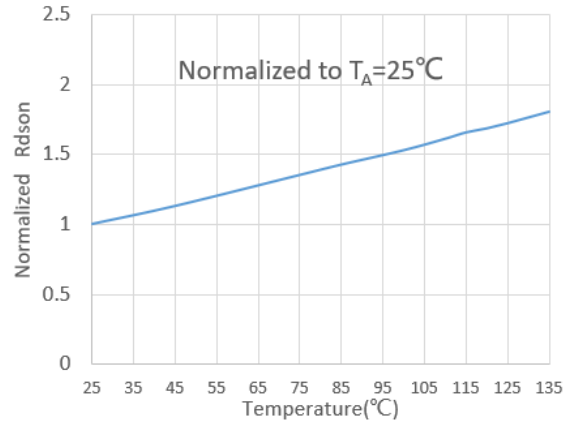


Normalized R_{DS_ON} vs Temp. ($I_{OUT}=1A$)




Normalized R_{DS_ON} vs Input Voltage ($I_{OUT}=1A$)

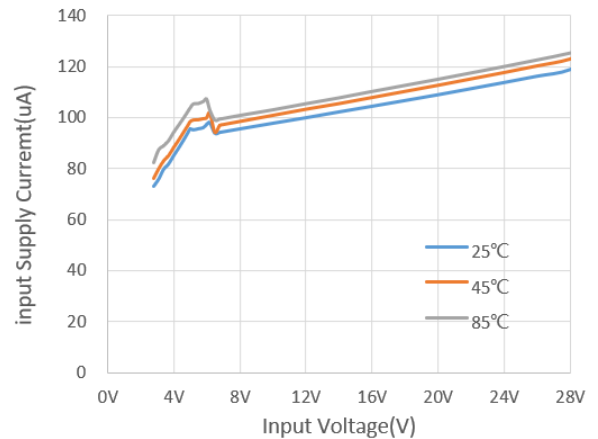

Input Supply Current vs Supply Voltage

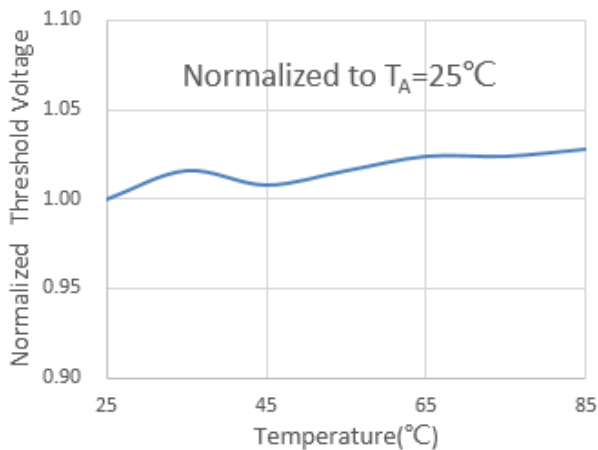


Normalized Internal OVP Threshold

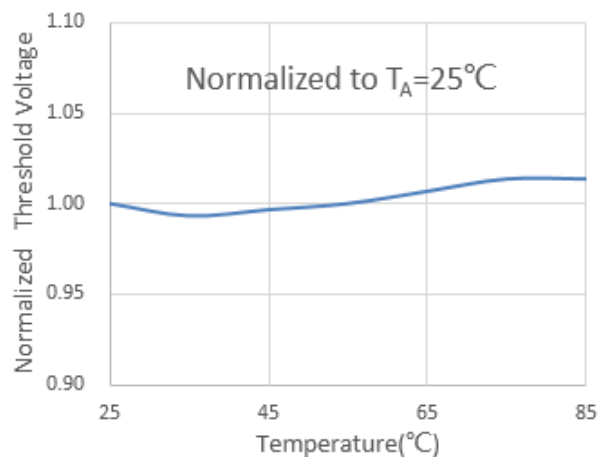


Normalized External OVP Threshold


Typical Performance Characteristics ($V_{IN} = 5V$, $C_{IN} = C_{OUT} = 0.1\mu F$, $R_{OUT} = 100\Omega$, $T_A = 25^\circ C$)

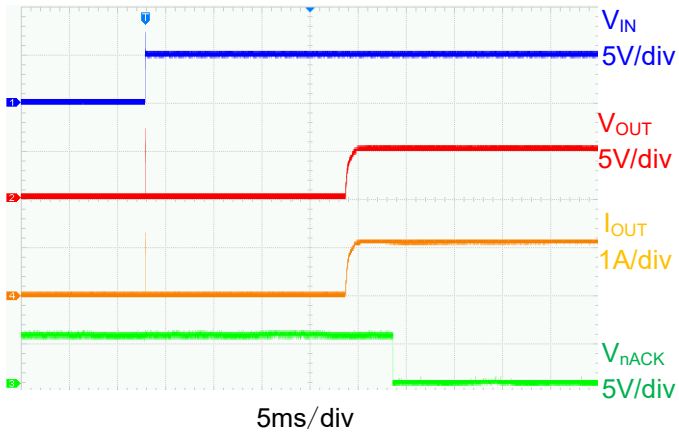


Power-up (1A load)

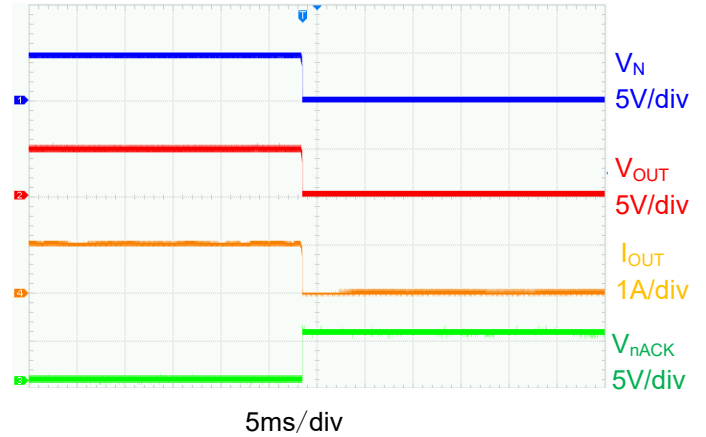

Power-down (1A load)

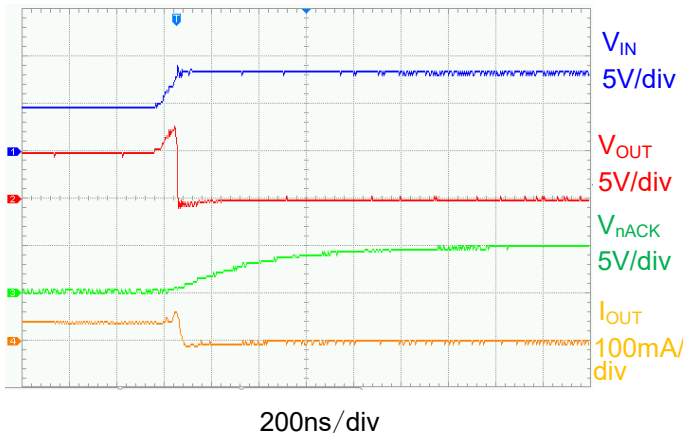


OVP Response

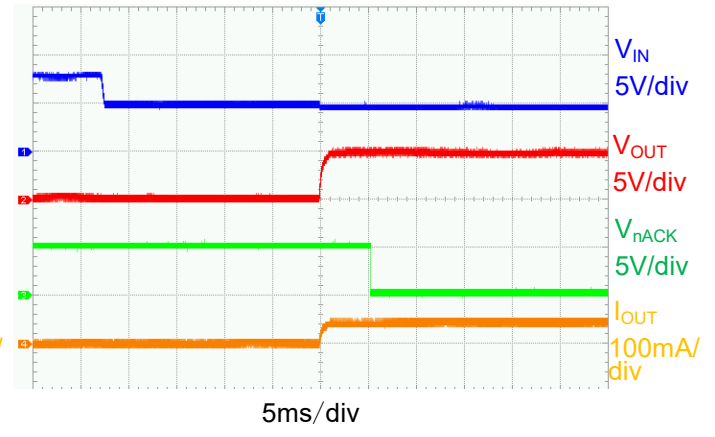


Recovery from OVP

Typical Application circuit

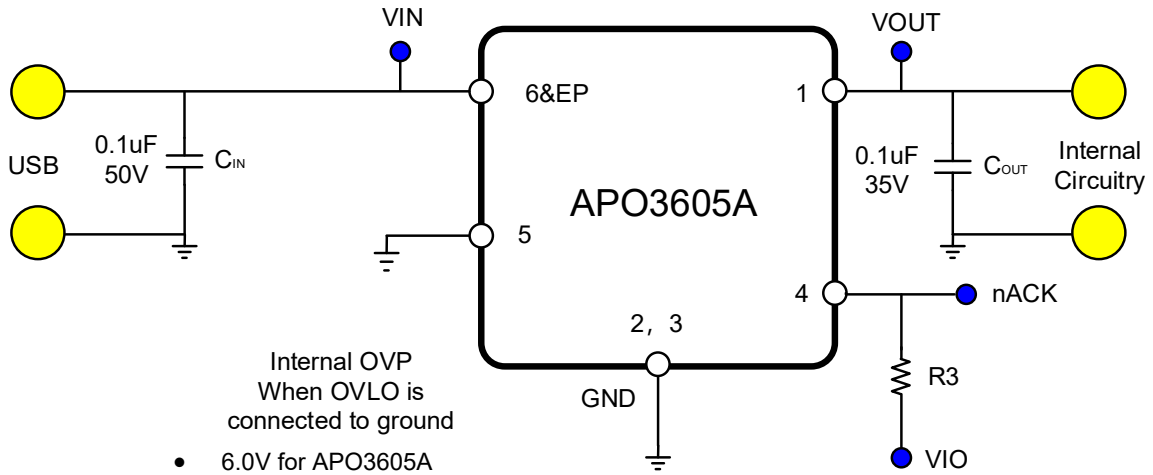

Fixed OVP circuit

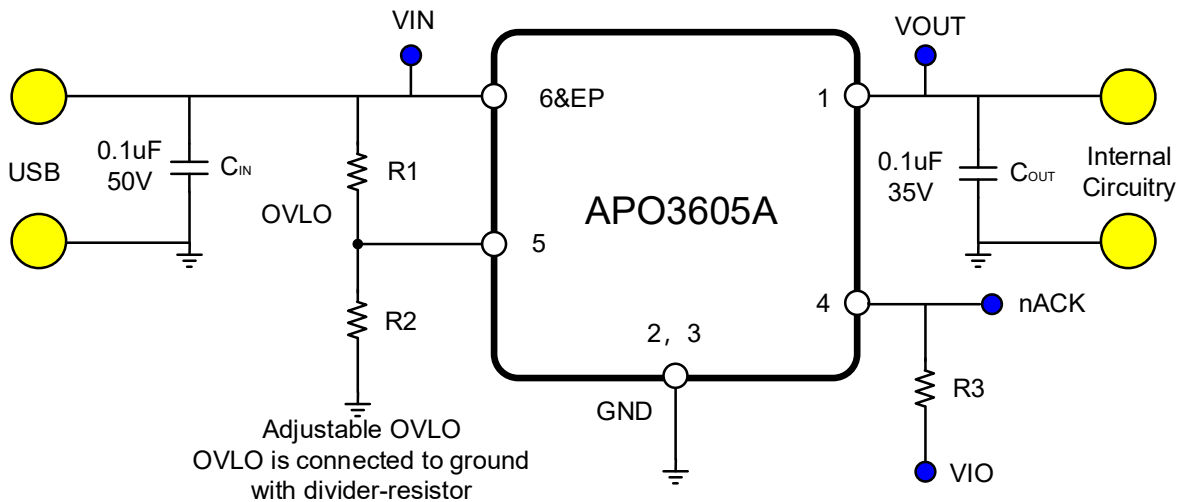

$VIN_OVLO = (R1+R2)/R2 * VOVLO_TH$, where $VOVLO_TH$ value is 1.20V(TYP.)
OVLO Pin voltage is more than 0.29V(TYP.)

Adjustable OVP circuit

Functional Description

Device Operation

If the input voltage is between UVLO and OVP threshold, the internal charge pump begins to work after debounce time, the gate of the nFET switch will be slowly charged high till the switch is fully on. If the input voltage exceeds the OVP trip level, the switch will be turned off in about 90ns. If input voltage falls below UVLO threshold, or over-temperature happens, the switch will also be turned off.

Over-Voltage Protection

If the input voltage exceeds the OVP rising trip level, the switch will be turned off in about 90ns. The switch will remain off until V_{IN} falls below the OVP falling trip level.

OVP Threshold Adjustment

If OVLO pin is not grounded, and by connecting external resistor divider to OVLO pin as shown in the typical application circuit, between IN and GND, the OVP threshold can be set as following formula:

$$V_{IN_OVLO} = (R_1 + R_2) / R_2 * V_{OVLO_TH}$$

The adjustment range is 4V to 20V. When the OVLO pin voltage V_{OVLO} exceeds V_{OVLO_SEL} (0.29V typical), V_{OVLO} is compared with the reference voltage V_{OVLO_TH} (1.2V typical) to judge whether input supply is over-voltage.

USB On-The-Go (OTG) Operation

If $V_{IN} = 0V$ and OUT is supplied by OTG voltage, the body diode of the load switch conducts current from OUT to IN and the voltage drop from OUT to IN is approximately 0.7V. When $V_{IN} > V_{IN_UVLO}$, internal charge pump begins to open the load switch after debounce time. After switch is fully on, current is supplied through switch channel and the voltage drop from OUT to IN is minimum.

Load Switch Status Indicator

The device has a load switch status indicator to notify load switch on/off status to other devices. When load switch is on status, the device pulls nACK pin down to the GND.

Thermal Protection

The device has an Over-Temperature Protection circuit to protect device against system fault or improper use. When the junction temperature exceeds the threshold, 140°C typical, the device shuts down and stays off until the temperature cools down to a safe region (below falling threshold). Once the falling threshold, the device will automatically resume the normal operation with embedded timings.

Device Operation Summary


Conditions		Operations			
V_{IN}	V_{OUT}	Current Direction	nFET	nACK	Mode
< OVP Threshold	< V_{IN}	$V_{IN} \rightarrow V_{OUT}$	On	Low	Charge
< OVP Threshold	> V_{IN}	$V_{OUT} \rightarrow V_{IN}$	On	Low	OTG
\geq OVP Threshold	< V_{IN}	No Current flowing	Off	Hi-z	OVP
\geq OVP Threshold	> V_{IN}	$V_{OUT} \rightarrow V_{IN}$ (via the junction body diode)	Off	Hi-z	OVP
< UVLO Threshold	< V_{IN}	No Current flowing	Off	Hi-z	UVLO
Don't Care	Don't Care	No Current flowing	Off	Hi-z	Thermal Shutdown

PCB Layout Consideration


1. All the peripherals should be placed as close to the device as possible. Place the input capacitor C_{IN} on the top layer and close to V_{IN} pin, and place the output capacitor C_{OUT} on the top layer and close to V_{OUT} pin.
2. Exposed Pad (EP) connects to V_{IN} , which is USB connector, and conducts large current during normal operation as well as surge protection. Route it out as straight, wide and short as possible. Also keep other traces away from it to minimize possible EMI coupling.
3. GND pin 2 & 3 conducts large current during surge protection. Make sure no signal trace blocks the path for current flow.
4. Use rounded corners on the power trace to decrease EMI.
5. If R_1 and R_2 are used, route OVLO line as short as possible to reduce parasitic capacitance.

Package Outline Drawing


DFN2x2-6L



TOP VIEW



SIDE VIEW

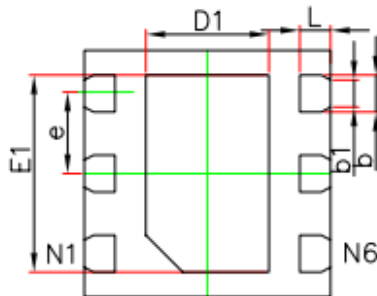

BOTTOM VIEW

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203 REF.		0.008 REF.	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.900	1.100	0.035	0.043
E1	1.500	1.700	0.059	0.067
b	0.250	0.350	0.010	0.014
b1	0.220 REF.		0.009 REF.	
e	0.650 BSC.		0.026 BSC.	
L	0.174	0.326	0.007	0.013

Contact Information

Applied Power Microelectronics Inc.

 Website: <http://www.appliedpowermicro.com>

 Email: sales@appliedpowermicro.com

Phone: +86 (0519) 8399 3606