

Description


The CM15N10AU is the N-Channel enhancement mode power field effect transistors with high cell density, high voltage planar technology. This high density process and design have been optimized switching performance and especially tailored to minimize on-state resistance.

Features

- V_{DS} : 100V
- I_D : 15A
- $R_{DS\text{ON}}(@V_{GS}=10\text{V})$: < 110mΩ
- $R_{DS\text{ON}}(@V_{GS}=4.5\text{V})$: < 120mΩ
- High density cell design for extremely low $R_{DS\text{ON}}$
- Excellent on-resistance and DC current capability

Equivalent Circuit and Pin Configuration

TO-252

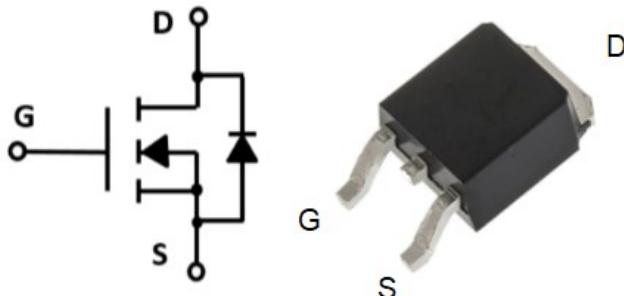

Applications

- AC/DC load switch
- SMPS
- Notebooks and Handhelds adapter
- UPS Power

Marking Information



Marking Code = CM15N10AU

Date Code = XXXX

Ordering Information

P/N	Packaging	Remark
CM15N10AU	2500/Tape and Reel	ROHS

Absolute Maximum Ratings ($T_c=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Maximum	Unit
Drain-source Voltage	V_{DS}	100	V
Gate-source Voltage	V_{GS}	± 20	V
Continuous Drain Current ⁽¹⁾	I_D	15	A
		9	A
Pulsed Drain Current ⁽²⁾	I_{DM}	60	A
Total Power Dissipation ⁽³⁾	PD	34	W
		14	W
Thermal Resistance Junction-to-Case ⁽³⁾	$R_{\theta JC}$	3.6	$^\circ\text{C}/\text{W}$
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to +150	$^\circ\text{C}$

Electrical Characteristics (T_c=25 °C unless otherwise noted)

Parameter	Symbol	Conditions	Min	Typ	Max	Units
Static Parameter						
Drain-Source Breakdown Voltage	BVDSS	V _{GS} =0V, I _D =250µA	100			V
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =100V, V _{GS} =0V, T _c =25°C			1	µA
Gate-Body Leakage Current	I _{GSS}	V _{GS} =±20V, V _{DS} =0V			±100	nA
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250µA	1.0		3.0	V
Static Drain-Source on-Resistance	R _{DS(on)}	V _{GS} =10V, I _D =8A		90	110	mΩ
		V _{GS} =4.5V, I _D =8A		95	120	
Diode Forward Voltage	V _{SD}	I _S =15A, V _{GS} =0V			1.2	V
Maximum Body-Diode Continuous Current	I _S				15	A
Dynamic Parameters						
Input Capacitance	C _{iss}	V _{DS} =25V, V _{GS} =0V, f=1.0MHz		445		pF
Output Capacitance	C _{oss}			155		
Reverse Transfer Capacitance	C _{rss}			14.8		
Switching Parameters						
Total Gate Charge	Q _g	V _{DS} =50V, I _D =2A, V _{GS} =10V		8.1		nC
Gate Source Charge	Q _{gs}			0.9		
Gate Drain Charge	Q _{gd}			1.7		
Turn-on Delay Time	t _{D(on)}	V _{GS} =10V, V _{DD} =50V, I _D =1A, R _{GEN} =3.3Ω		16		ns
Turn-on Rise Time	t _r			3.7		
Turn-off Delay Time	t _{D(off)}			12		
Turn-off Fall Time	t _f			8.1		

Noted: (1) Pulse Test: Pulse Width≤300us, Duty cycle ≤2%.

(2) Pulse width limited by maximum junction temperature

(3) Device mounted on FR-4 PCB, 1 inch x 0.85 inch x 0.062 inch. With 2oz Copper, t≤10s

Typical Performance Characteristics

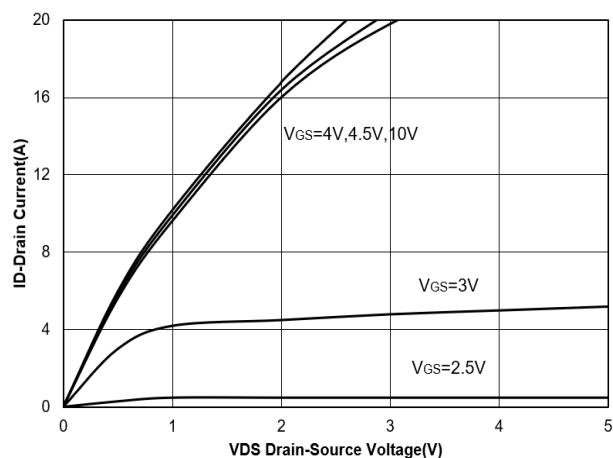


Figure 1. Output Characteristics

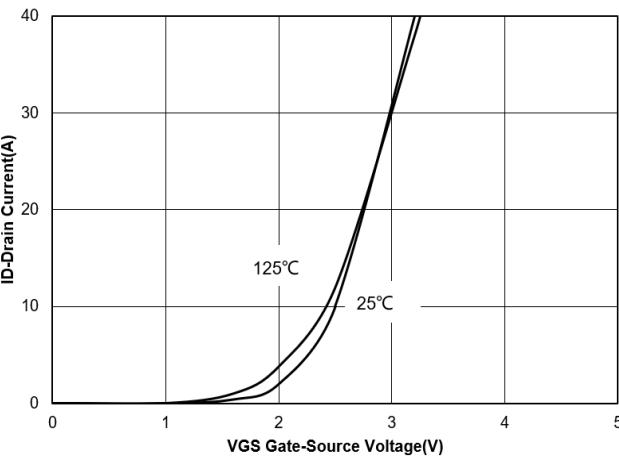


Figure 2. Transfer Characteristics

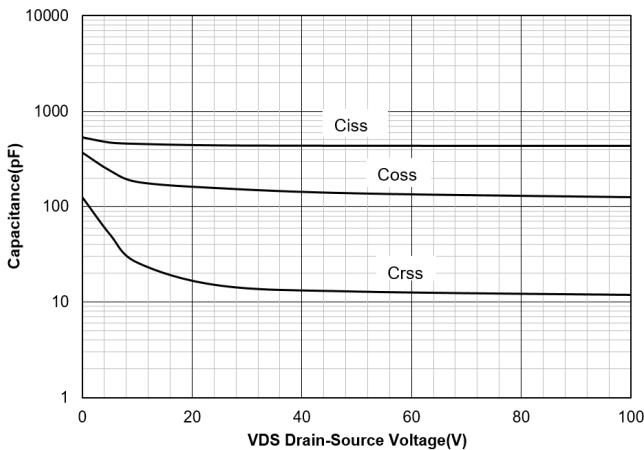


Figure 3. Capacitance Characteristics

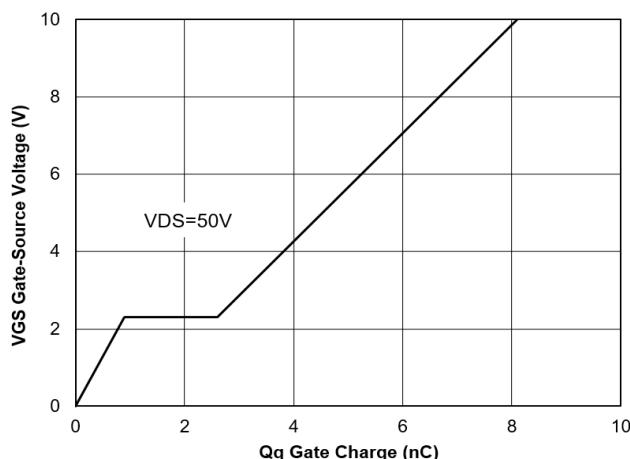


Figure 4. Gate Charge

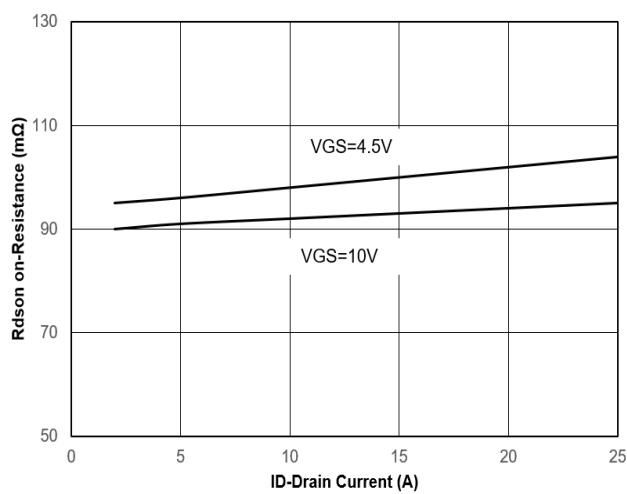


Figure 5. Drain-Source on Resistance

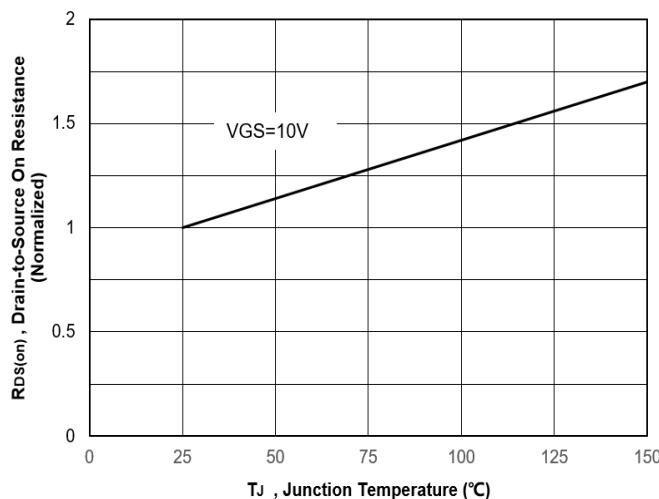


Figure 6. Normalized On-Resistance Vs. Temperature

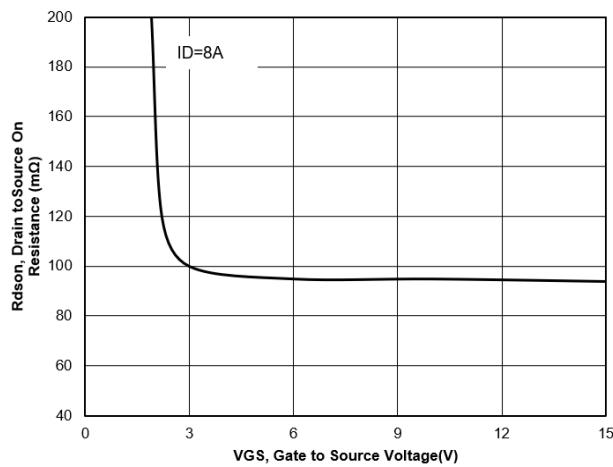


Figure 7. Typical Drain to Source ON Resistance
VS Gate Voltage and Drain Current

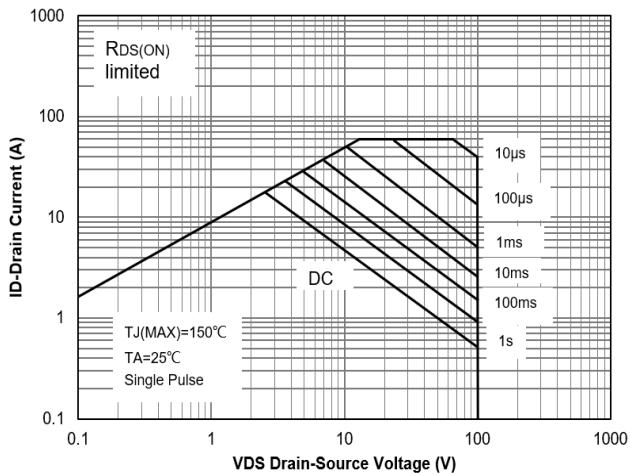


Figure 8. Safe Operation Area

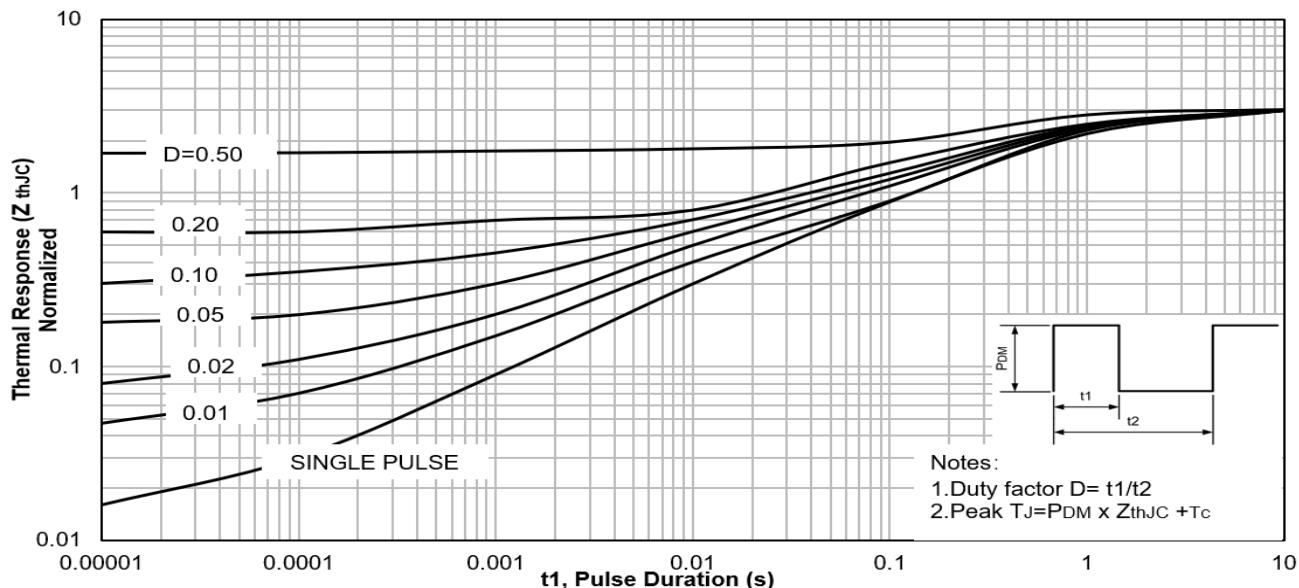


Figure 9. Maximum Effective Transient Thermal Impedance ,Junction-to-Case


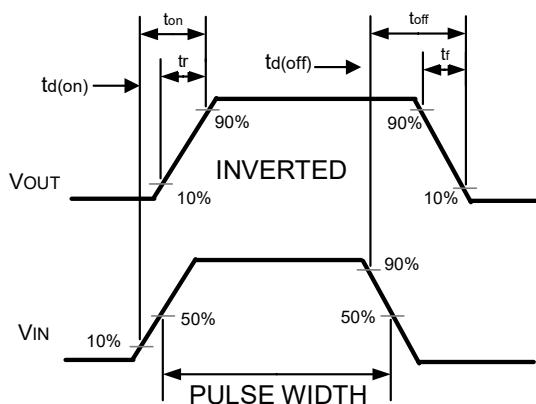


Figure 10. Switching wave

TO-252 Package Outline Drawing

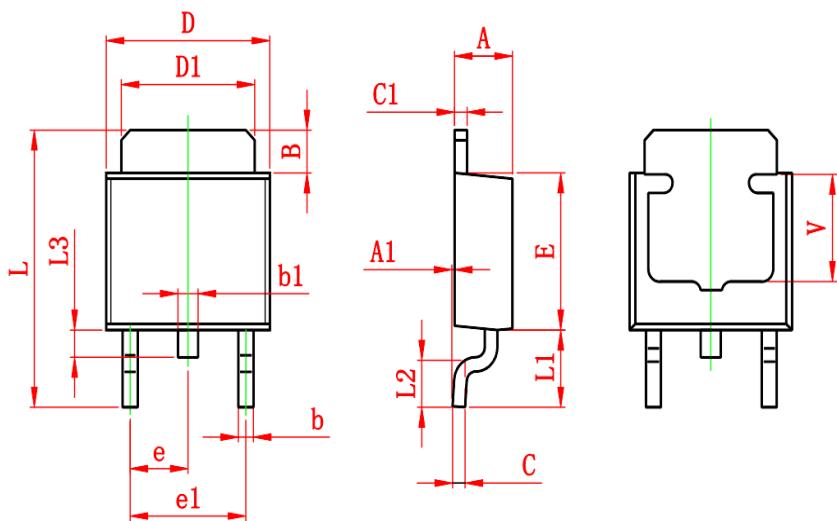

Symbol	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
B	1.350	1.650	0.053	0.065
b	0.500	0.700	0.020	0.028
b1	0.700	0.900	0.028	0.035
c	0.430	0.580	0.017	0.023
c1	0.430	0.580	0.017	0.023
D	6.350	6.650	0.250	0.262
D1	5.200	5.400	0.205	0.213
E	5.400	5.700	0.213	0.224
e	2.300 TYP.		0.091 TYP.	
e1	4.500	4.700	0.177	0.185
L	9.500	9.900	0.374	0.390
L1	2.550	2.900	0.100	0.114
L2	1.400	1.780	0.055	0.070
L3	0.600	0.900	0.024	0.035
V	3.800 REF.		0.150 REF.	

Contact Information

Applied Power Microelectronics Inc.

Website: <http://www.appliedpowermicro.com>

Email: sales@appliedpowermicro.com

Phone: +86 (0519) 8399 3606

Applied Power Microelectronics Inc. (APM) reserves the right to make changes to the product specification and data in this document without notice. APM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does APM assume any liability arising from the application or use of any products or circuits, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.