JW7129 Multifunctional Lighting System

- Mobile terminal and content management system: GPS and GLONASS dual mode positioning, wireless and wired transmission, available for voice intercom
- Android 6.0 Marshmallow and voice input available
- Designed with touch screen and push-button panel
- Light modes: spotlight, floodlight, red and green /red and yellow signal light
- Dual battery for emergency illumination function
- Infrared laser for fast photographing positioning

COMPONENTS

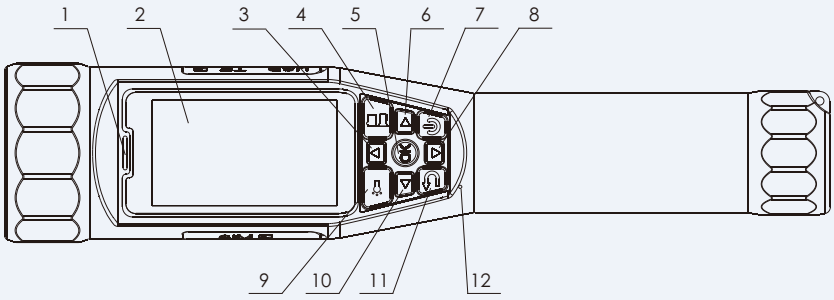

1. Speaker
2. Touch screen
3. Up button
4. Shutter button
5. OK button
6. Right button
7. Power switch
8. Down button
9. Lighting button
10. Left button
11. Back button
12. Microphone

APPLICATION

Product design and specifications are subject to change without notice, please check the OKTECH website for latest specifications.

TECHNICAL SPECIFICATION

CERTIFICATION & APPROVALS

CQST approved.

MATERIALS

Enclosure	Polycarbonate
Transparent cover	Polycarbonate

ELECTRICAL PARAMETER

Input	100V~240V AC 50Hz~60Hz
Output	3.7 V DC
Ambient temperature	-20 °C to +55 °C
Degree of protection	IP65

BATTERY

Type	Lithium battery
Capacity	4 Ah(external) + 2.6 Ah(built-in)
Battery life	approx. 1000 cycles
Charging time	< 6 h

LAMP

Type	LED
Rated power	1W
Life	≥ 100000 h

CONFORMITY TO STANDARDS

IEC60598

Dimensions in mm

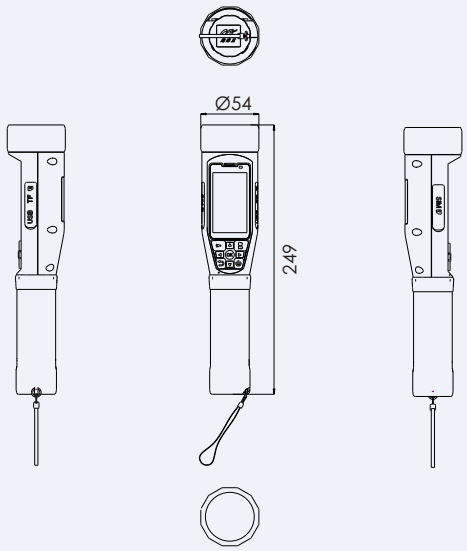

CAMERA

Videoing time	> 8 h(with spotlight on) > 8 h(with floodlight on) > 16 h(with light off)
Touch screen	2.45 "
Camera	12 - megapixel
Resolution (video)	1080P / 720P / 480P
Video file format	Mp4
Photo format	JPEG
Port	USB2.0
Storage	up to 128G

SELECTION TABLE

Designation	*Description*	*Weight*
Model	LED	0.38 kg

Product design and specifications are subject to change without notice, please check the OKTECH website for latest specifications.