



## MODEL: 12N6-3B

## NO.:301020003-00077

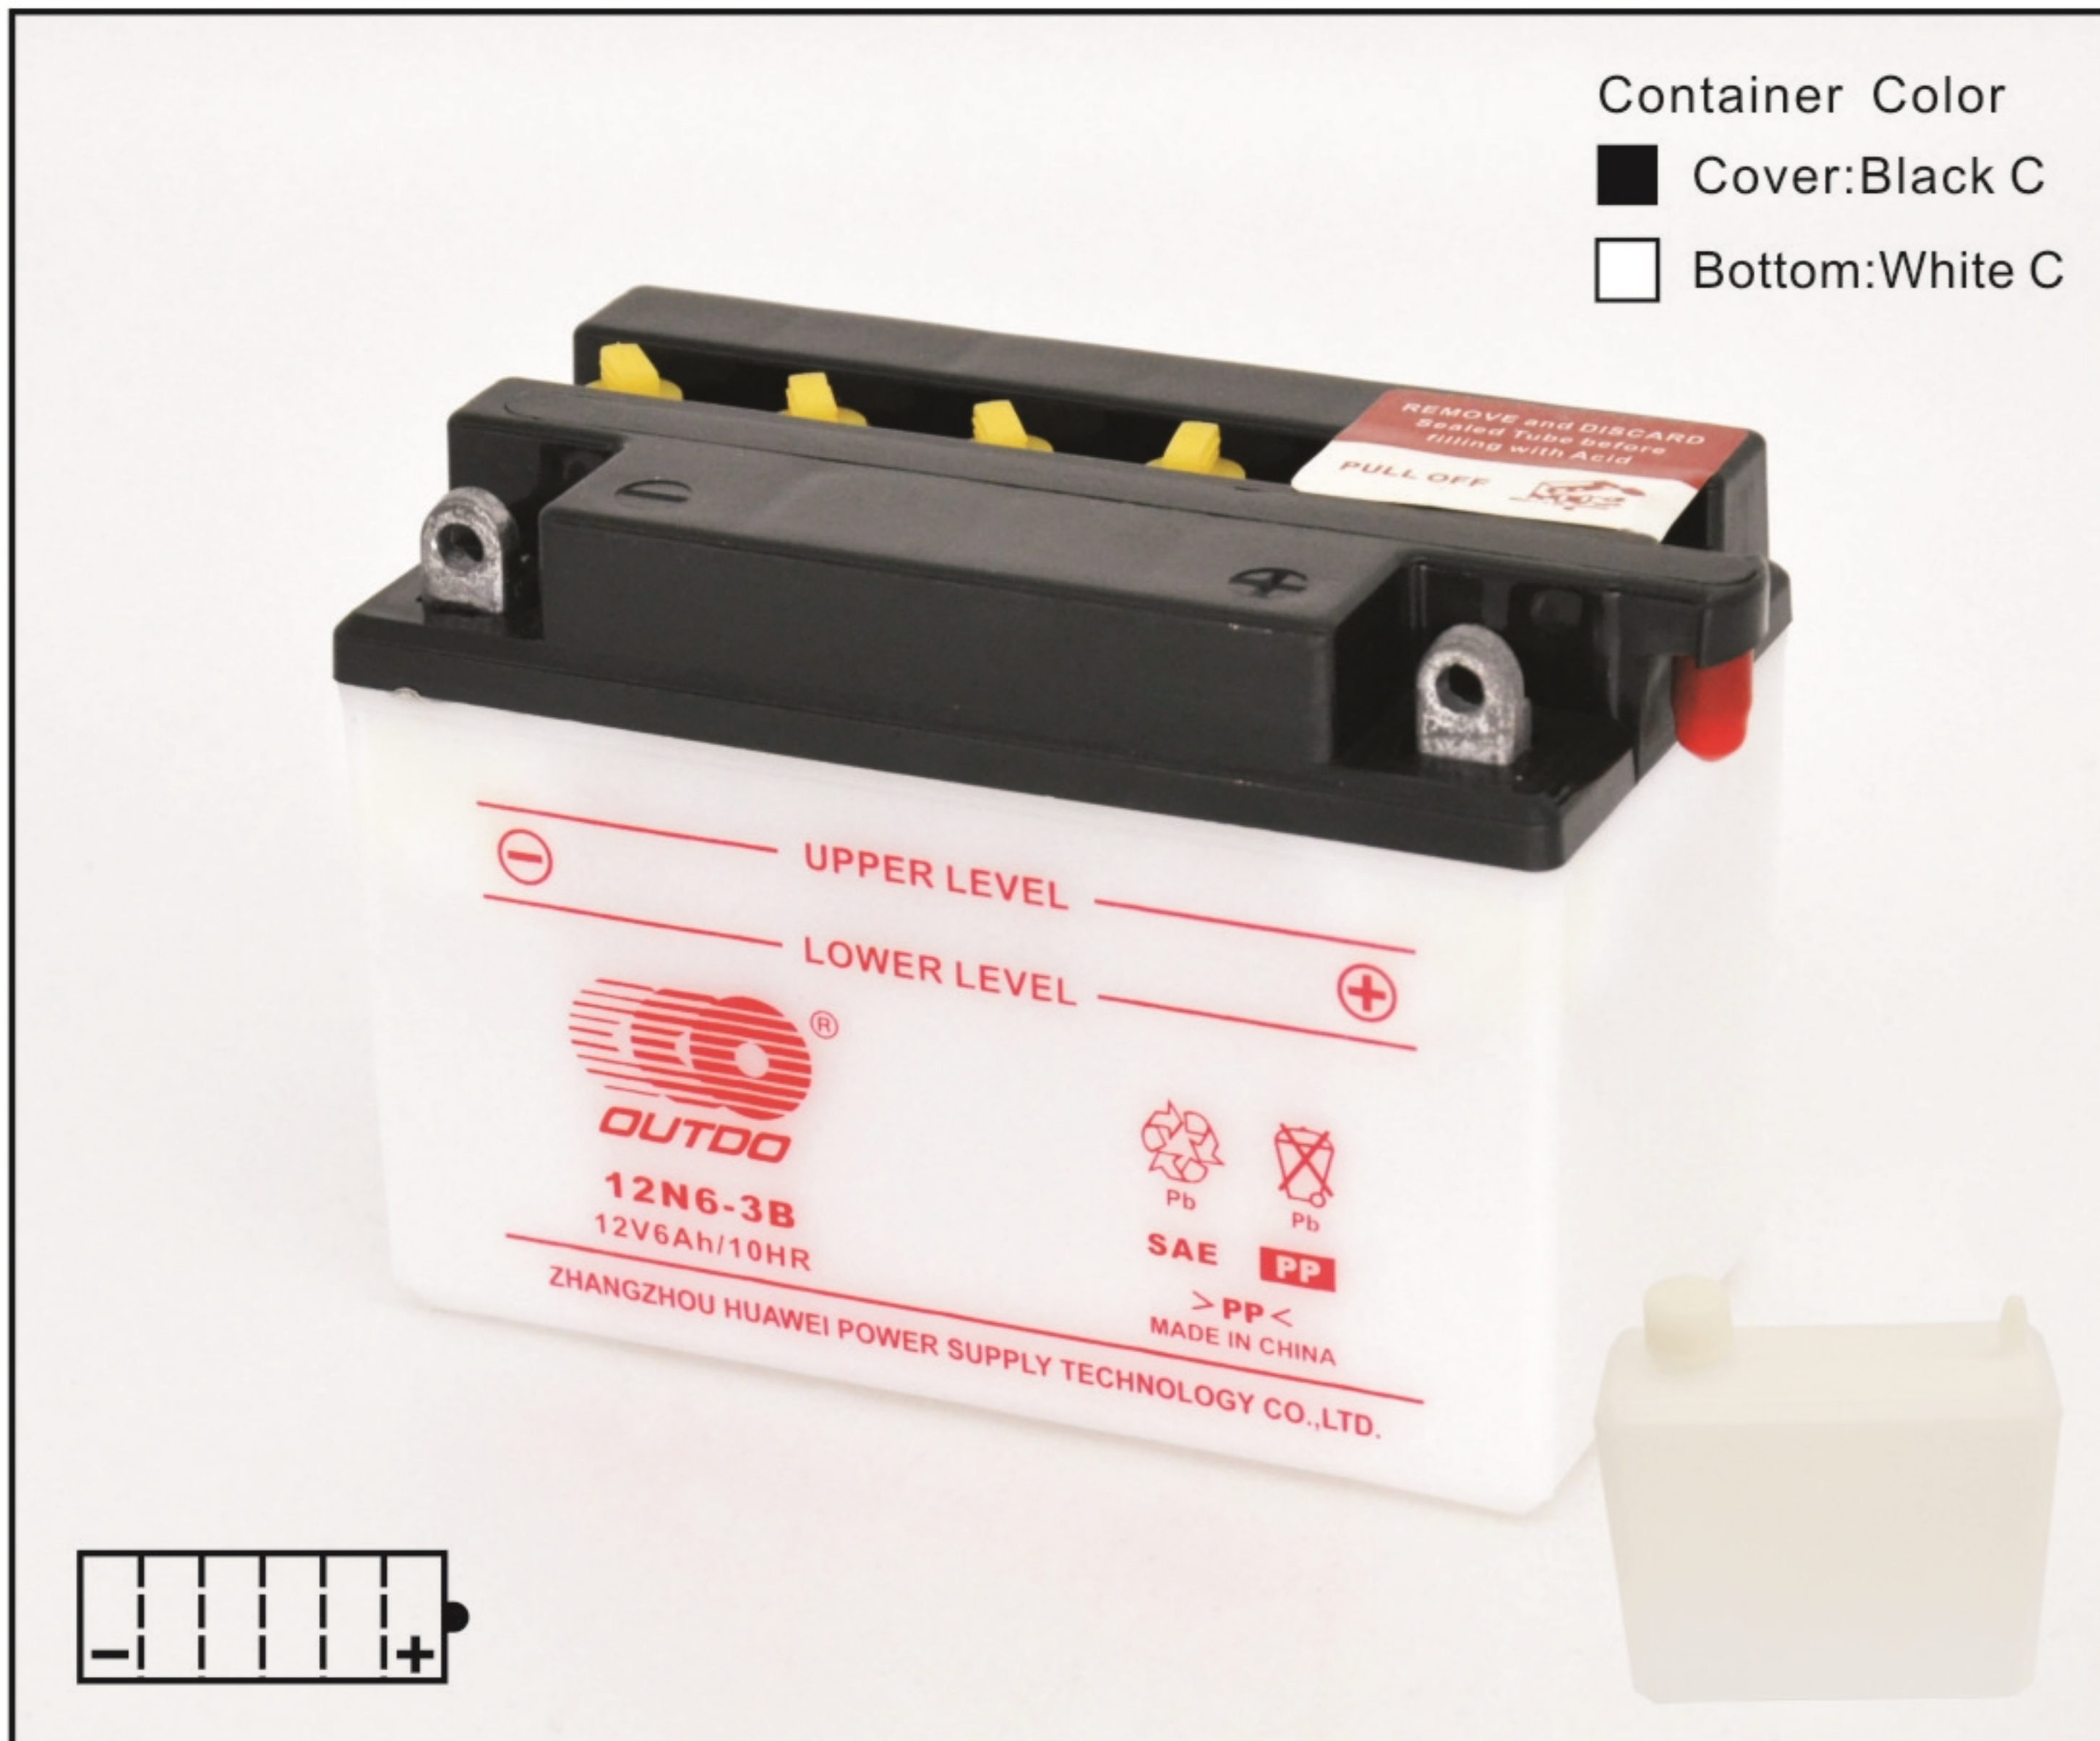

### Plane Chart:

Unit:mm Terminal type:G1

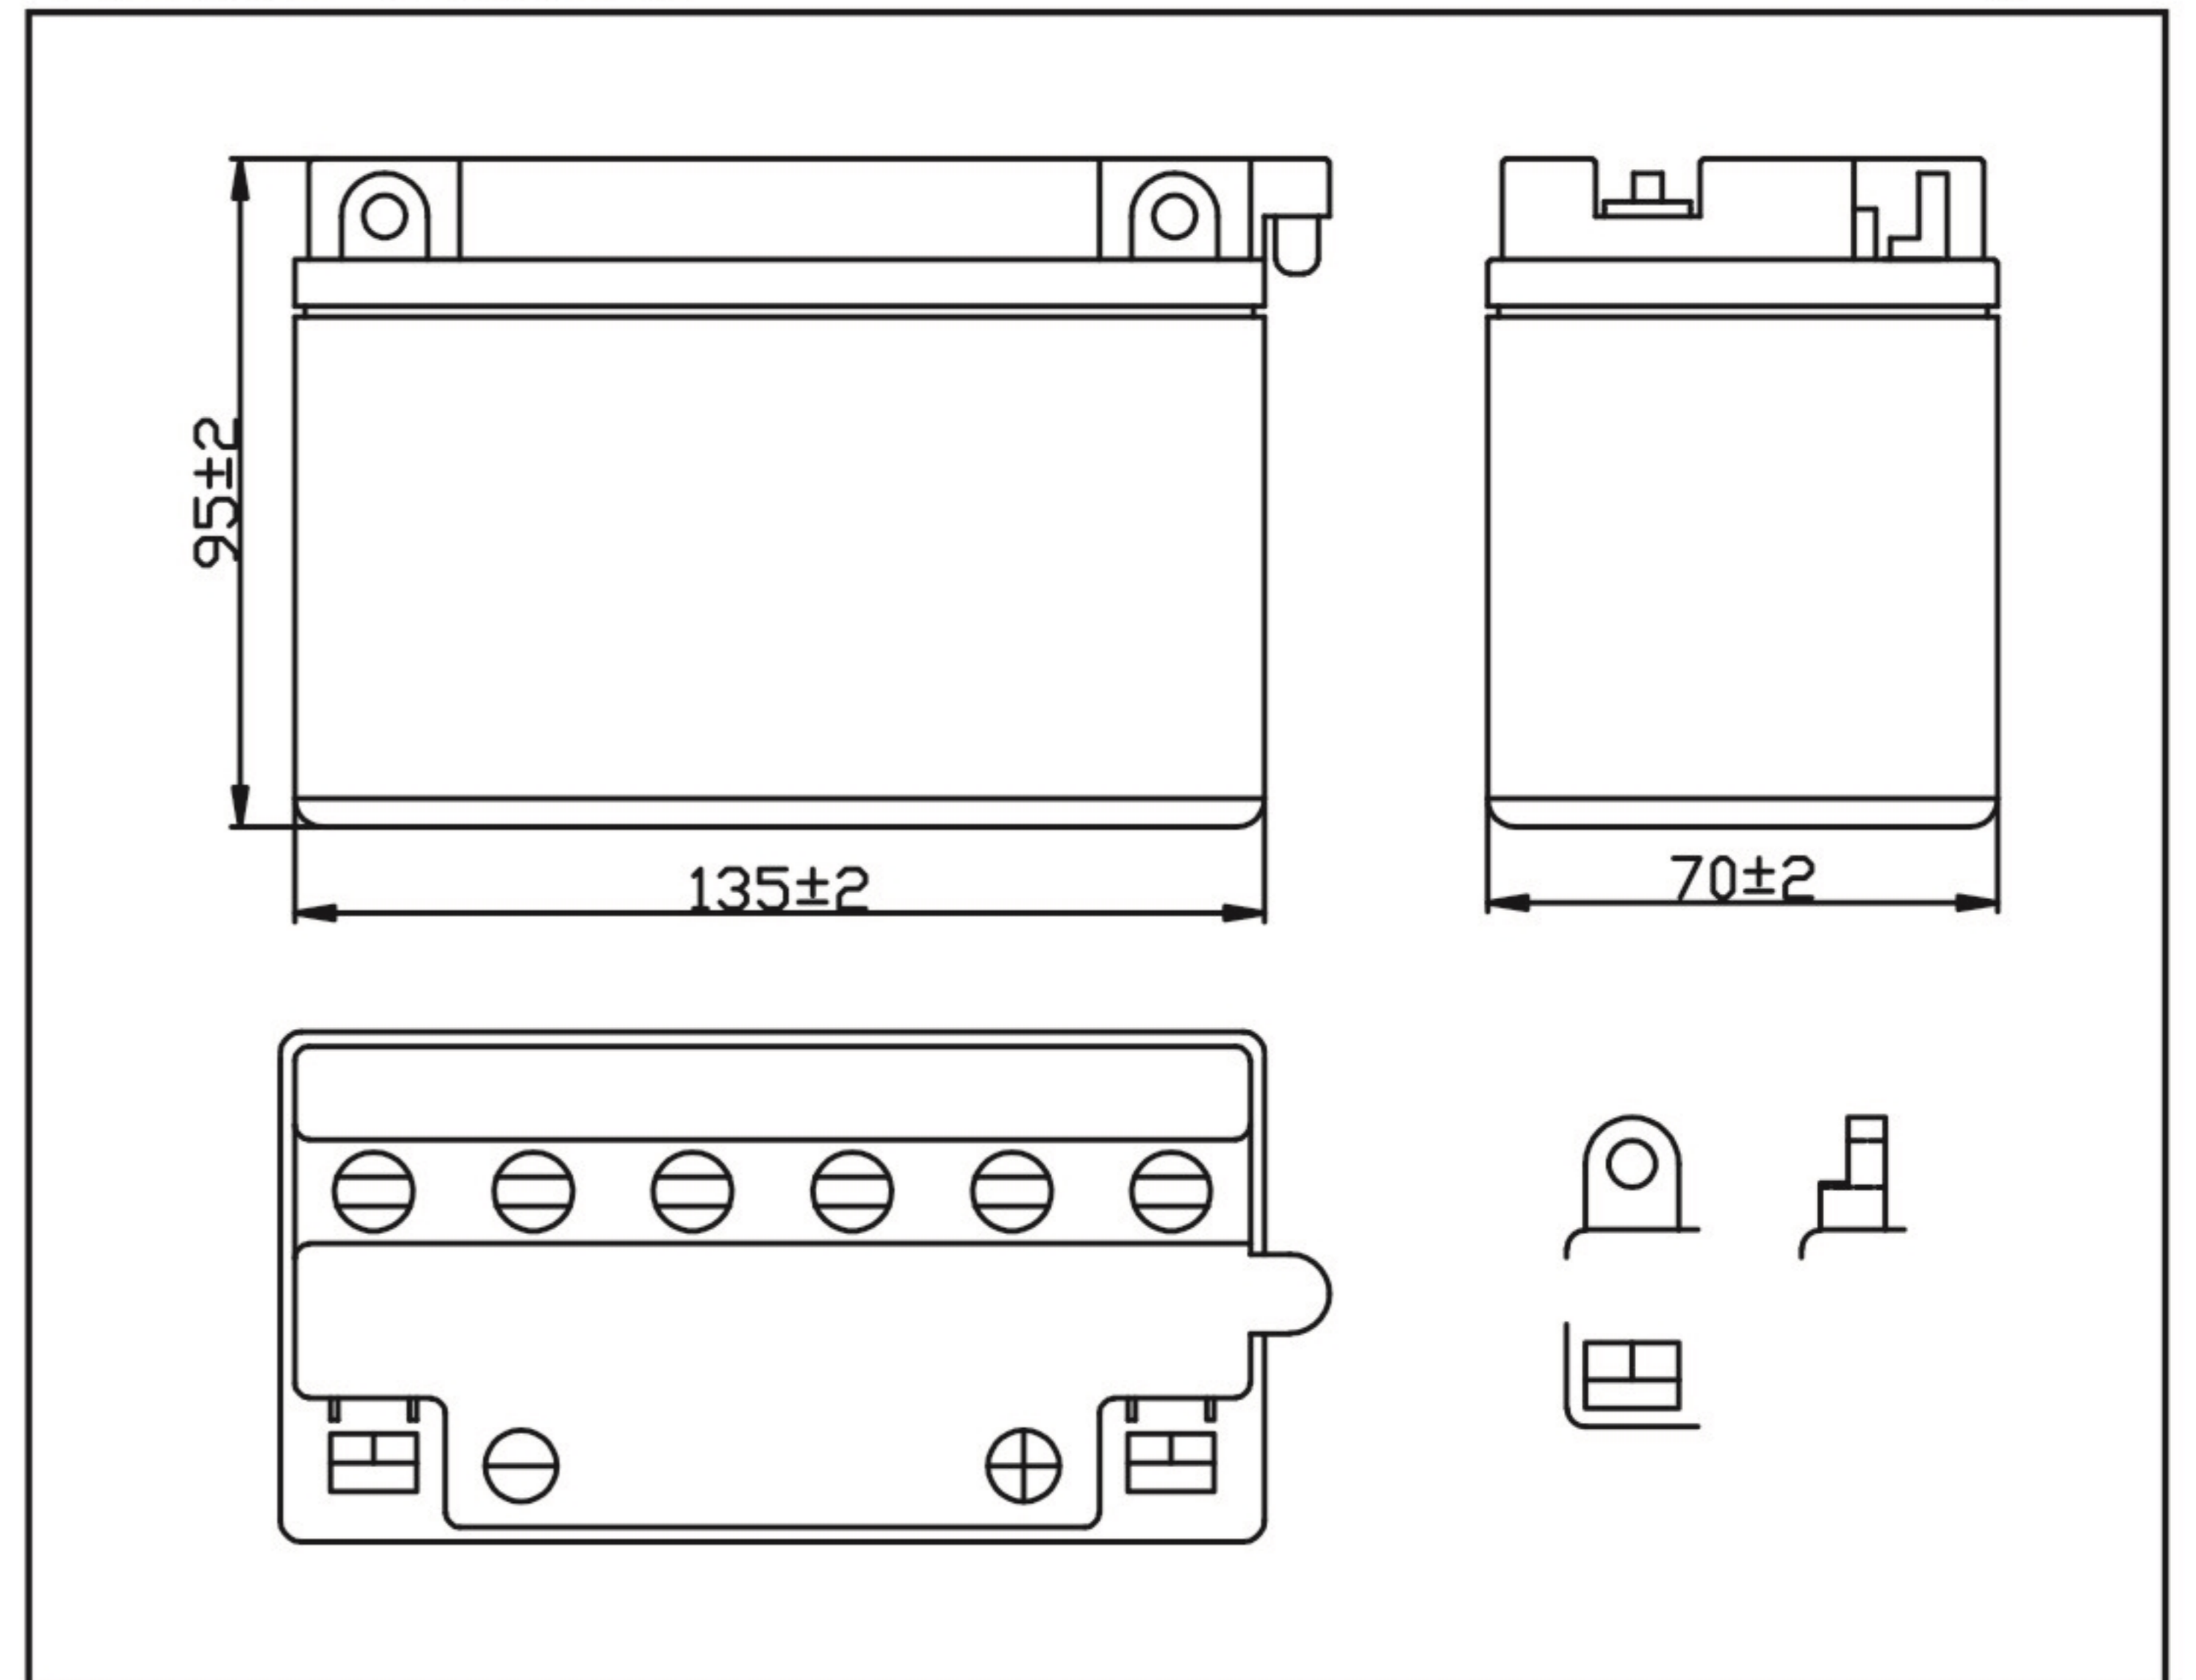

### Parts:


Executed Standard:JISD 5302-2004

| Cover | Container Bottom | Terminal | Positive Plate   | Negative Plate | Separator             | Electrolyte              | Safety Valve | Explosion Plate | Way of Sealing |
|-------|------------------|----------|------------------|----------------|-----------------------|--------------------------|--------------|-----------------|----------------|
| PP    | PP               | Pb       | PbO <sub>2</sub> | Pb             | PE/<br>Compound Fibre | dilute<br>sulphuric acid | Rubber       | PP              | Heat Sealing   |


### Parameter Chart:

| Volts               | 12V                                      |   |                          |
|---------------------|--|---|--------------------------|
| Capacity (25°C)     | 10 hours rate                            |   | 6Ah                      |
| Appx.Dimension (mm) | L±2                                      |   | 135                      |
|                     | W±2                                      |   | 70                       |
|                     | H±2                                      |   | 95                       |
| Storage Status      | Dry                                      |   |                          |
| Weight (Approx)     | 1.43Kg                                   | Weight w/ Acid  | 0.5Kg                    |
|                     | <b>Retention of Charge Storage @25°C</b> |   |                          |
| 1 month             | 97%                                      | Directly Mounted  |                          |
| 3 month             | 90%                                      | Directly Mounted  |                          |
| 6 month             | 80%                                      | Constant Volts:14.4V Limit Current:1.2A Charging Hours:2-3H |                          |
| 12 month            | 40%                                      | Constant Volts:14.4V Limit Current:1.2A Charging Hours:4-6H |                          |
| CCA                 | Factory Standard (-10°C)                 |   | Factory Standard (-18°C) |
|                     | Discharging Current                      |   | 40A                      |
|                     |  |   | 50A                      |

### Discharge Current 25°C

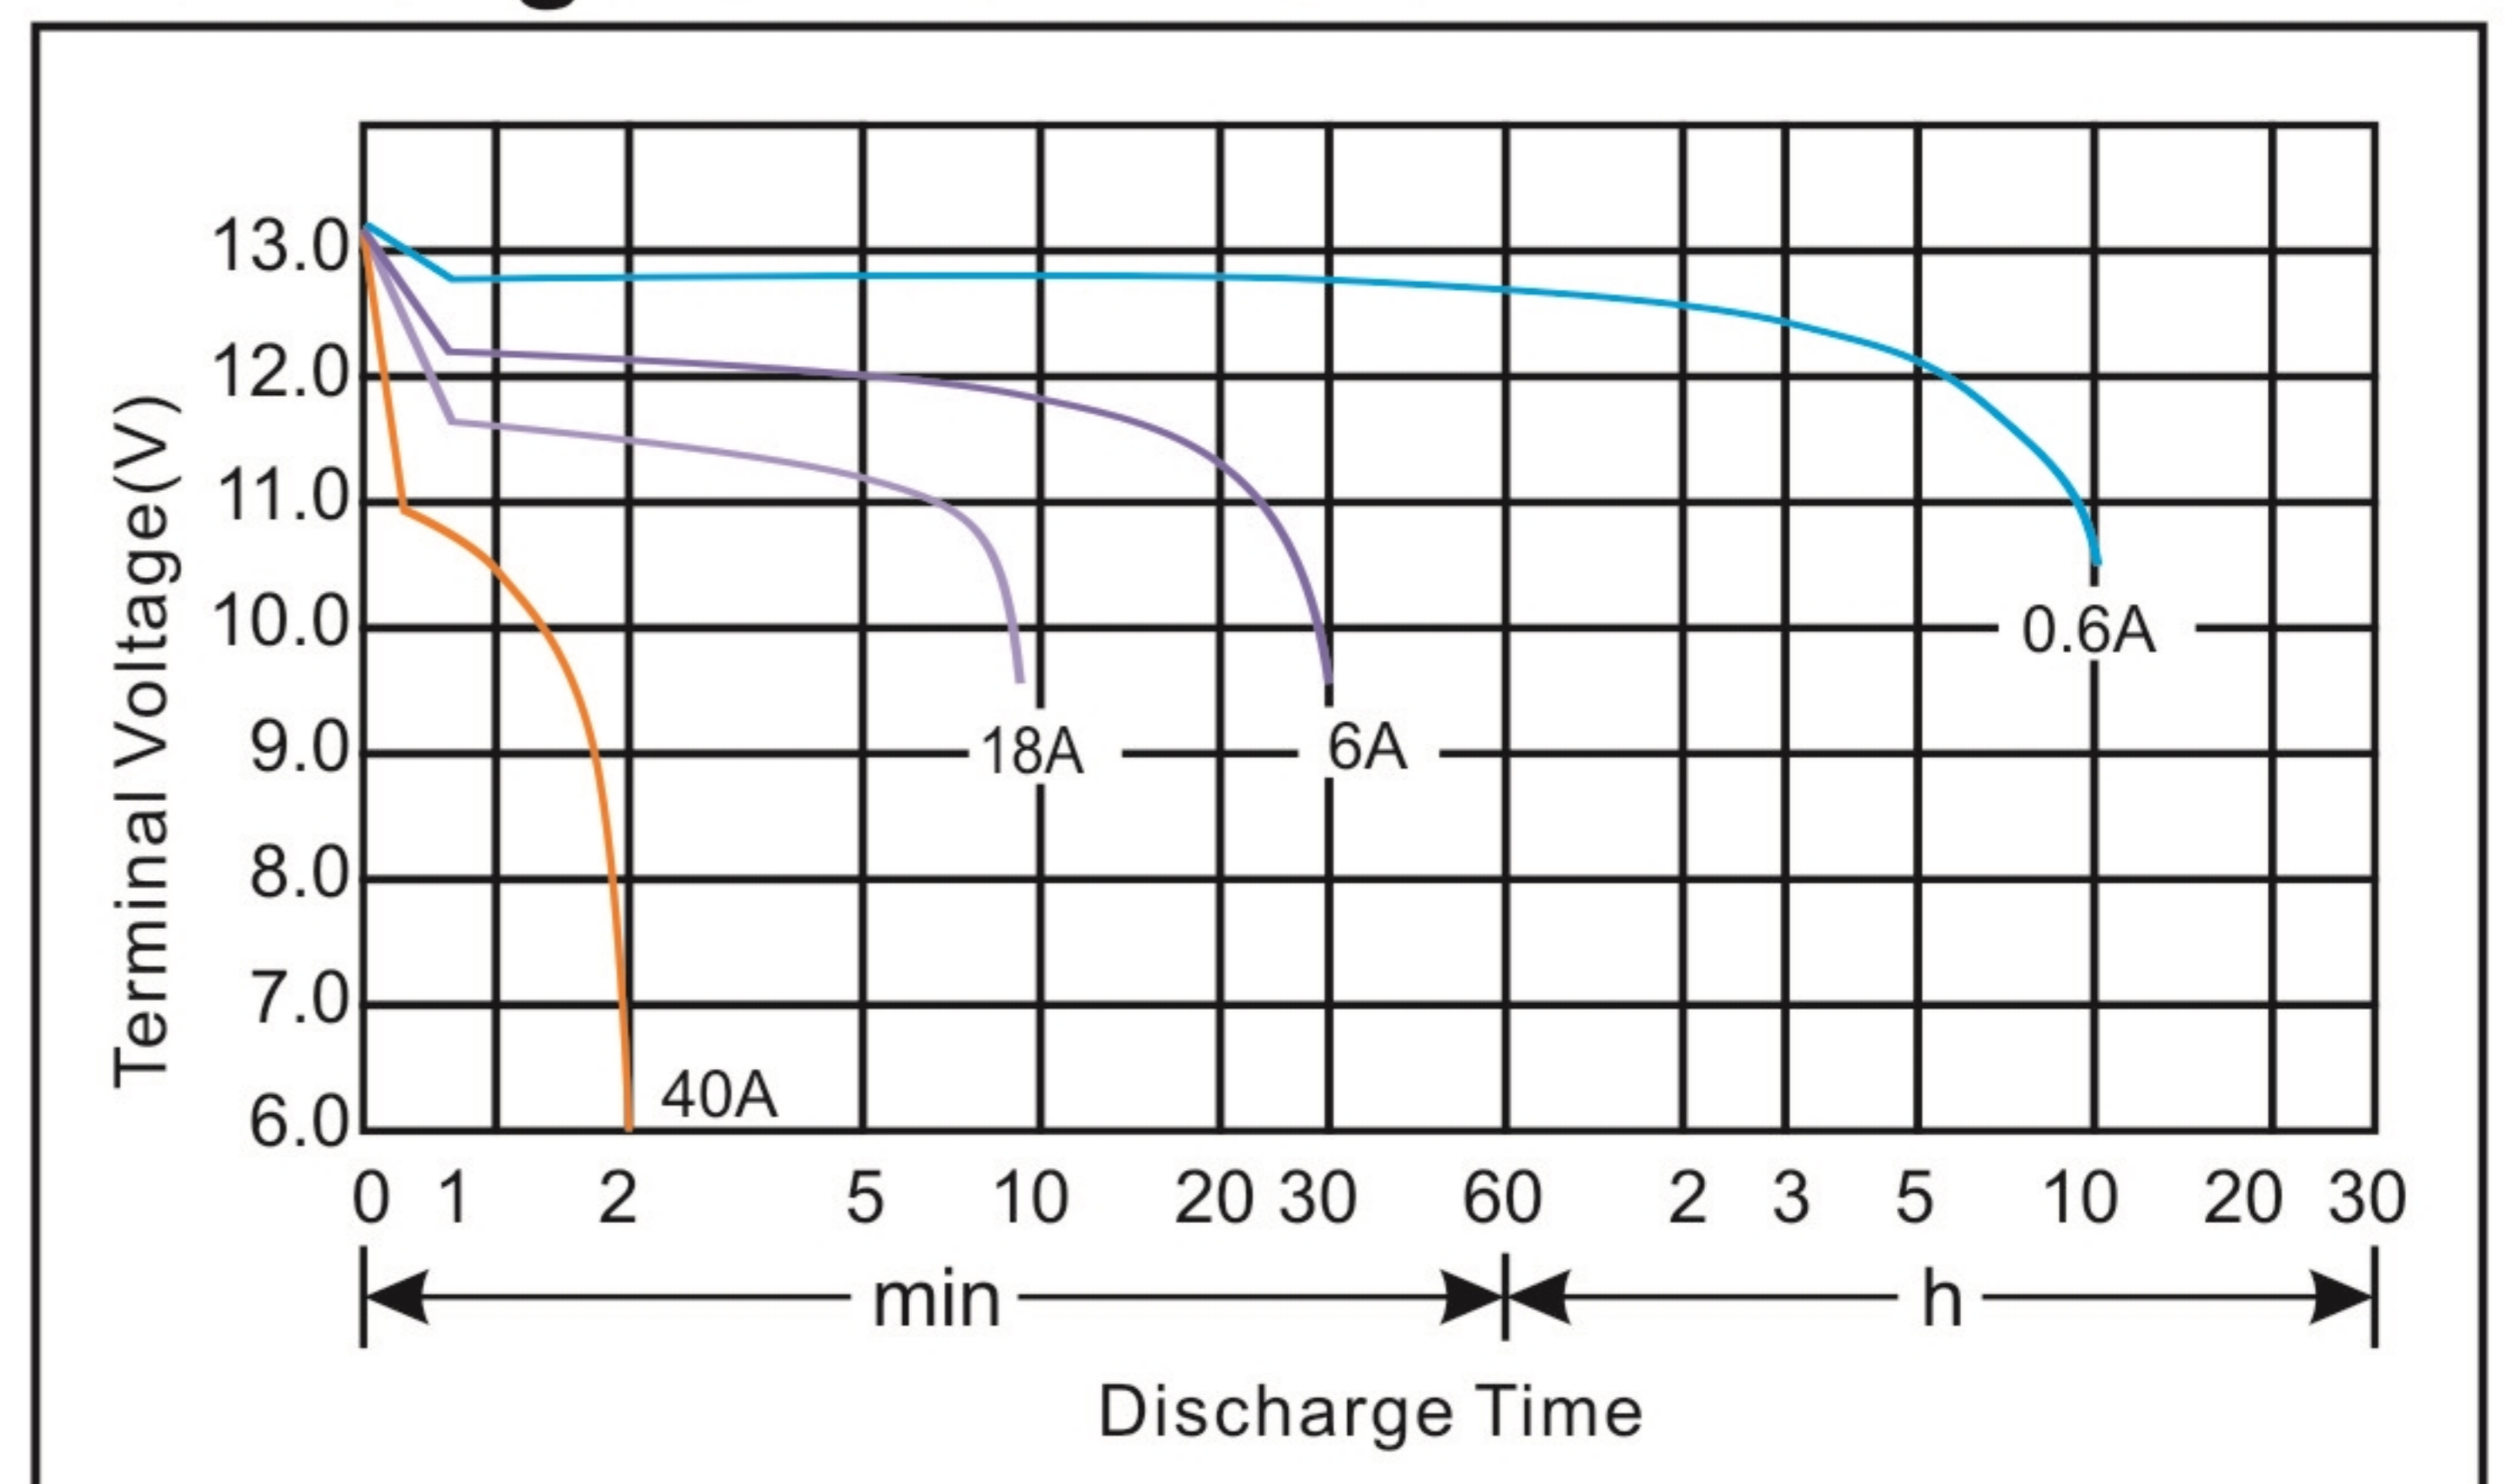

### Residual Capacity

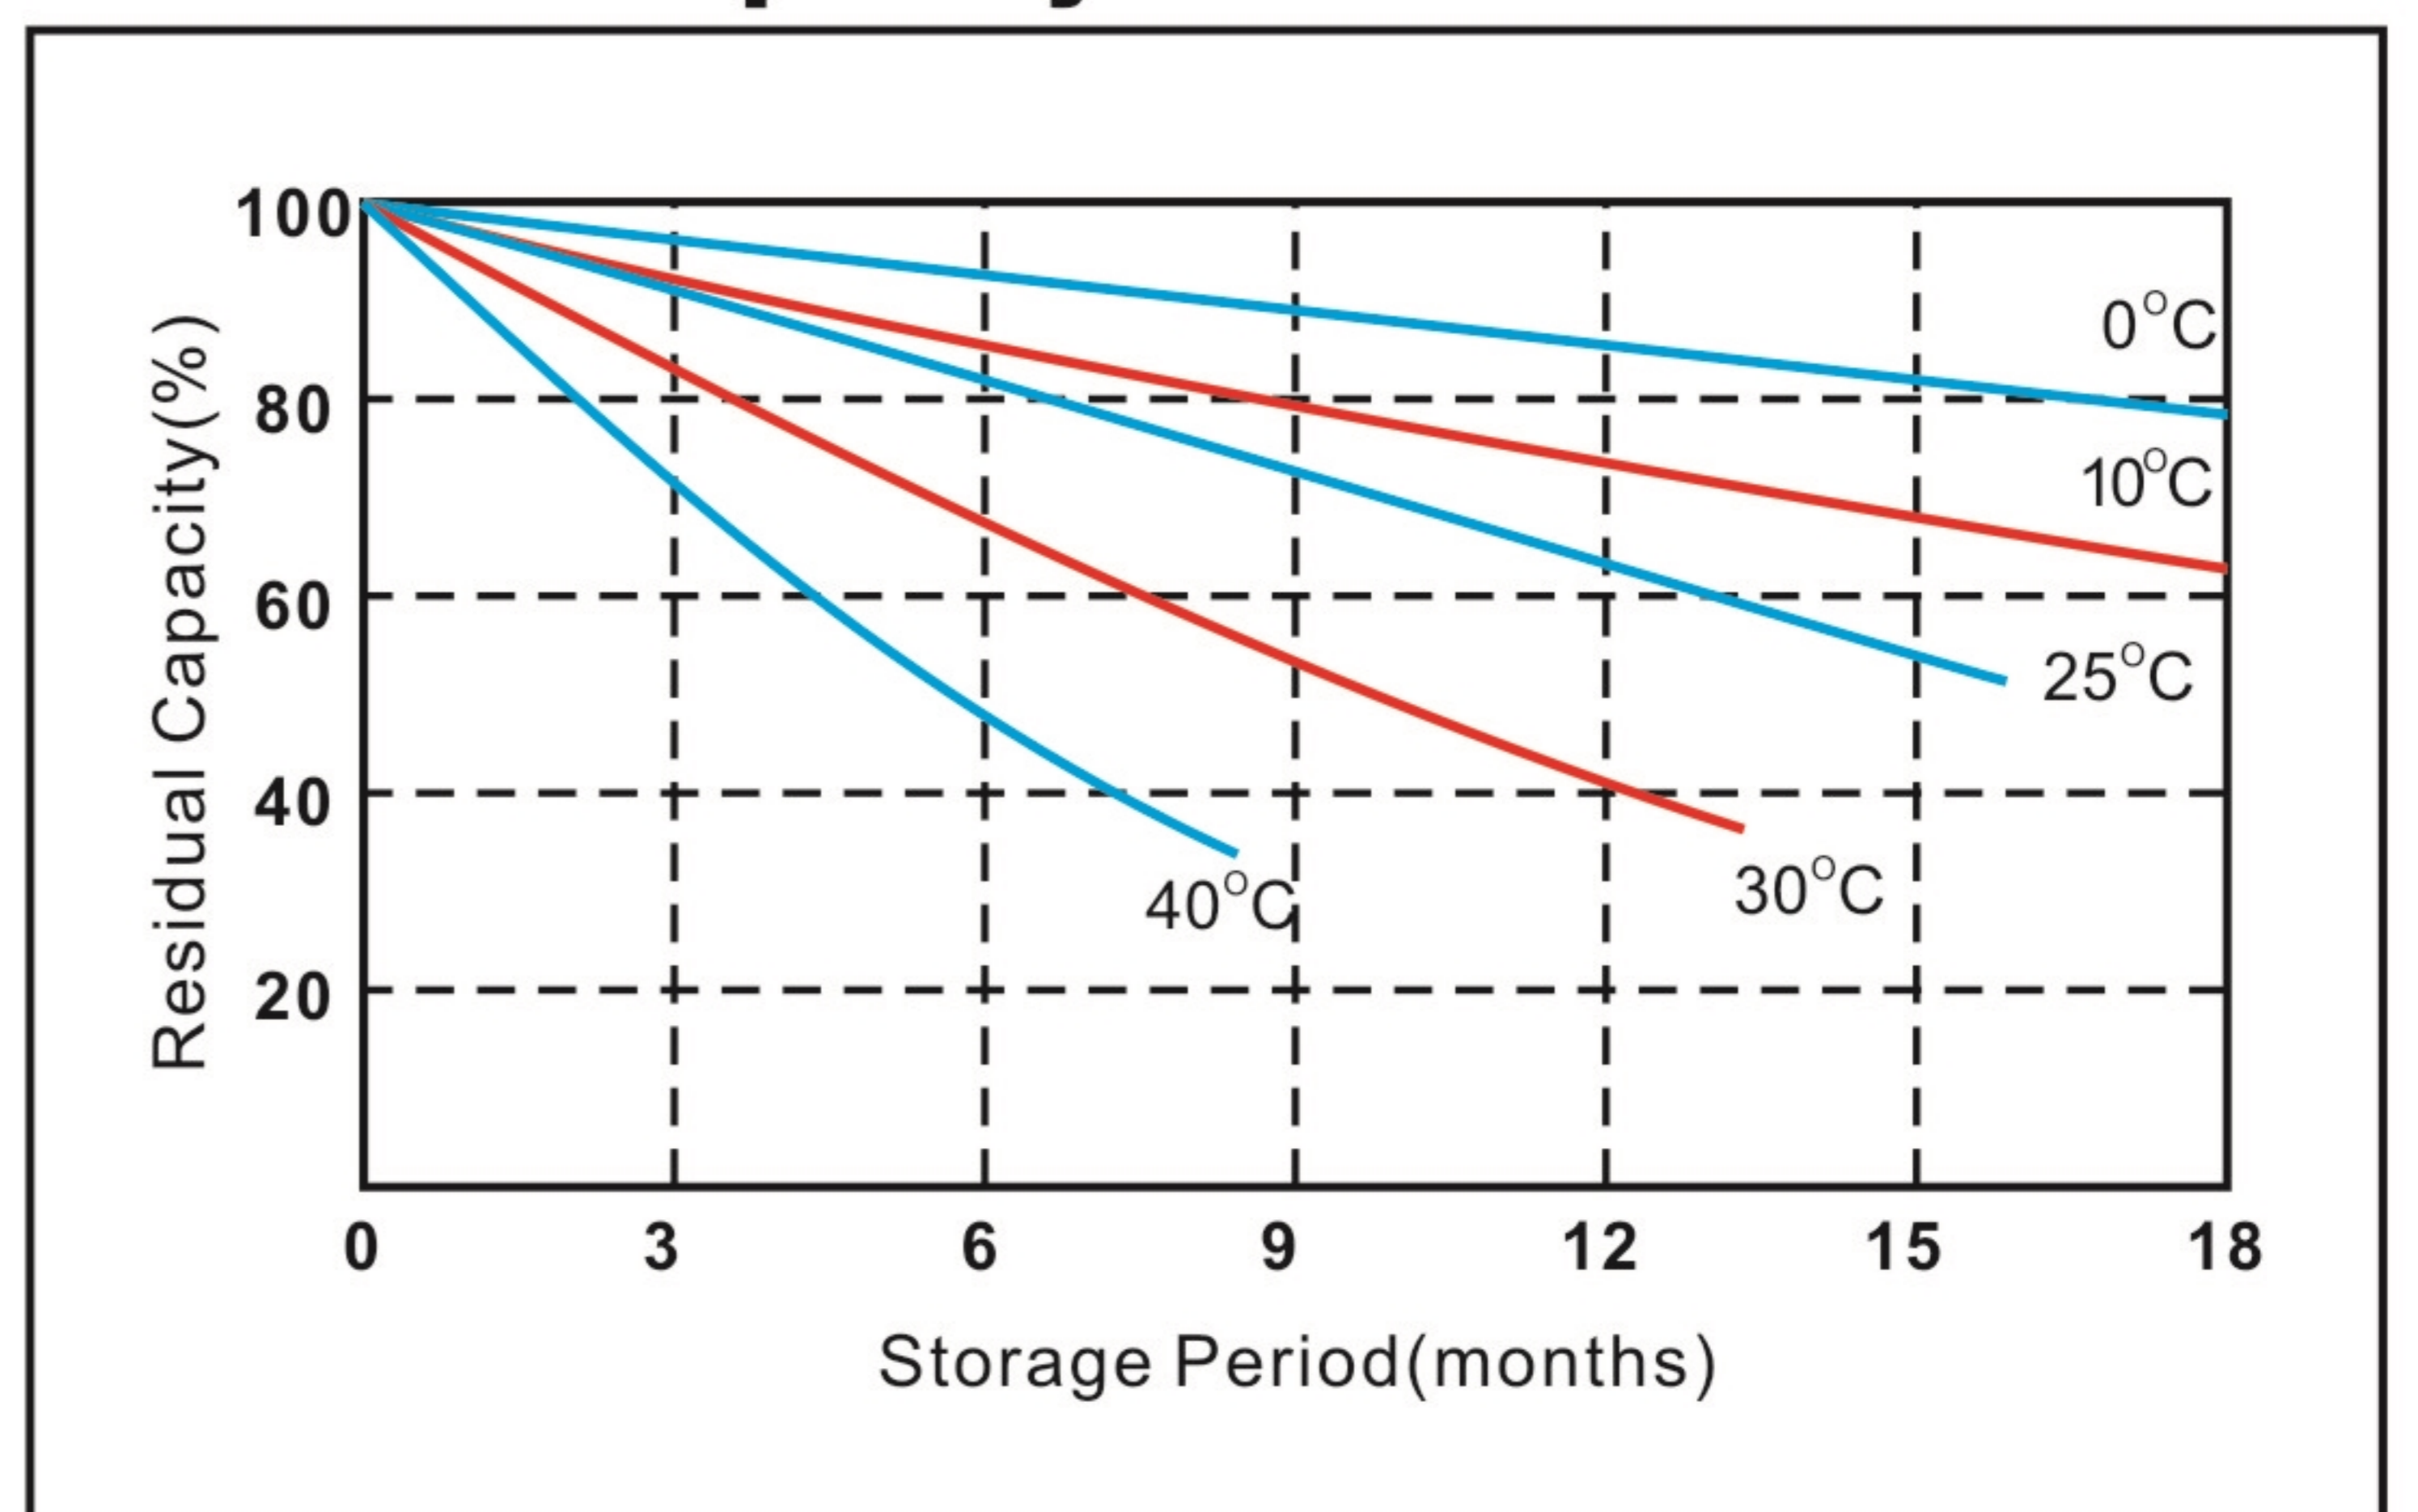

★The above are average and data obtained from the first 3 charge/discharge cycles. These are not minimum values.

★The different item No. of battery can be developed according to the customer's demand.