


工艺参数 Technological parameters

产品系列 Product series	A C
纱线支数 Count range of yarn	50-2000D
喂入直径 Feed diameter of package	Φ250mm
纱线品种 Type of yarn	氨纶丝 Spandex、长丝 Filament yarn
卷取速度 Winding speed	1000m/min (依据生产工艺 Depending on process parameters)
成卷直径 Diameter of assembled package	Φ220mm
成卷重量 Diameter of assembled package	4kg
适配筒管 Type of yarn bobbin	6" - 10" (根据客户要求 Depending on customer request)
一般应用 Common application	网点喷点、工业丝包覆 (Air coated、Air covering of Filament yarn)

外形尺寸 Layout

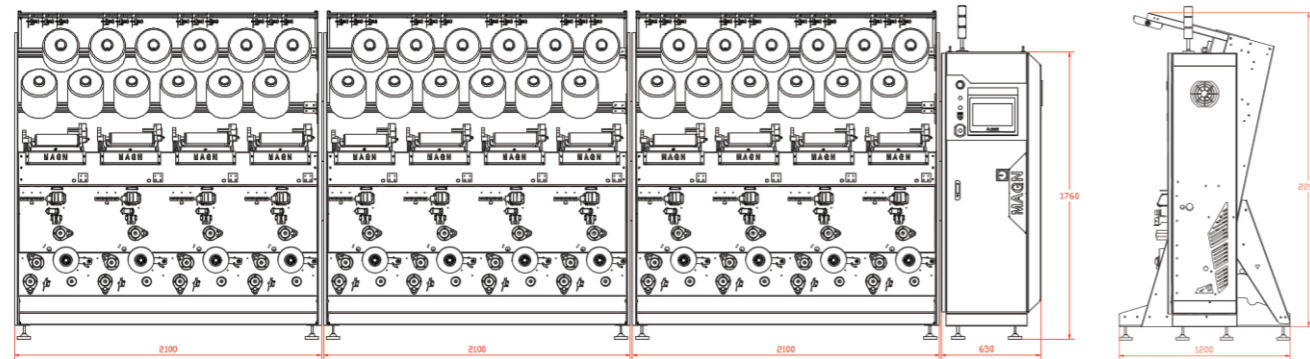

机器尺寸 Machine dimensions

锭数 Quantity	4锭/Sp	8锭/Sp	12锭/Sp	16锭/Sp	20锭/Sp	24锭/Sp	28锭/Sp	32锭/Sp	36锭/Sp	40锭/Sp	44锭/Sp	48锭/Sp	52锭/Sp	56锭/Sp	60锭/Sp
长度 Length(mm)	2750	4850	6950	9050	11150	13250	15350	17450	19550	21650	23750	25850	27950	30050	32150
宽度 Width(mm)	1200														
高度 Heigh(mm)	2280														
净重 Net weight(kg)	550	1025	1500	1975	2450	2925	3400	3875	4350	4825	5300	5775	6250	6725	7200

Air Covering Machine 空气包覆机

MAGN

苏州英迈杰机械有限公司
Suzhou Imagin Machinery Co.,Ltd.

地址：江苏省苏州工业园区唯文路7号
Block A, No.7 Weiwén Road, Suzhou
Industrial Park, Suzhou, Jiangsu, China

电话：0086-512-6706 6492
传真：0086-512-6706 6493
网址：www.imaginsz.com

江苏省南通海安市和顺路88号
No.88 Heshun Road, Hai'an Nantong
Jiangsu, China

Tel: 0086-512-6706 6492
Fax: 0086-512-6706 6493
Http: www.imaginsz.com

- 本样本仅作参考，不作为技术验收依据。
- 为提高产品质量，本公司保留更改规格之权力，恕不另行通知。
- We reserve the right to modify the characteristics of the machines described herein without prior notice.
- The data given in this brochure are not intended as a guarantee.

苏州英迈杰机械有限公司
Suzhou Imagin Machinery Co.,Ltd.

特点 Features

- **快速卷绕, 速度可达1000m/min;**
Fast winding, speed up to 1000m/min.
- **精准的米长控制, 偏差更小;**
Higher precision for length control, and the less deviation.
- **精密型陶瓷网络喷嘴, 网络点牢固, 卷绕质量有保障;**
Precision ceramic jet, the coated points are firm and the winding quality is guaranteed.
- **精密卷绕与数码卷绕模式, 应对不同卷绕工艺需要;**
Precision winding and digital winding modes, to deal with different winding process requirements.

选择AC系列空气包覆机, 您能实现

What can you expect from air covering of AC series

- **多种长丝及氨纶的网络包覆, 产品更加丰富;**
Variety of filament and spandex net covering, more abundant products.
- **数字背压控制, 纱卷内外密度更均匀;**
Digital force control, more uniform density inside and outside of yarn package.
- **高质量的卷绕工艺过程, 纱卷成型更完美;**
Higher quality winding process, yarn forming is more perfect.
- **多种功能选配方案, 满足不同客户的定制化需求;**
A variety of functional matching schemes to meet the customized needs of different customers.



主要参数 Features

型号	Type	AC-SW01
锭距	Gauge	505mm
每节锭数	Spindles per section	4锭
锭数配置	Spindles configuration	60锭(单面) Single side
卷绕速度	Winding speed	1000m/min
卷绕驱动	Winding drive	单锭伺服电机, Individual servo motor
动程范围	Traverse range	50~270mm
包覆形式	Coated type	网络喷嘴(气动) Jet(pneumatic)
喷嘴型号	Jet type	根据客户工艺要求配置 According to indications of customer requirements
张力控制	Yarn tension	闭环 close-loop、超喂装置 Overfeeding Device
背压控制	Force control	数字背压 Digital force
选配装置	Optional device	上油装置 Lubrication Device
		远程监控系统 Remote monitoring system

