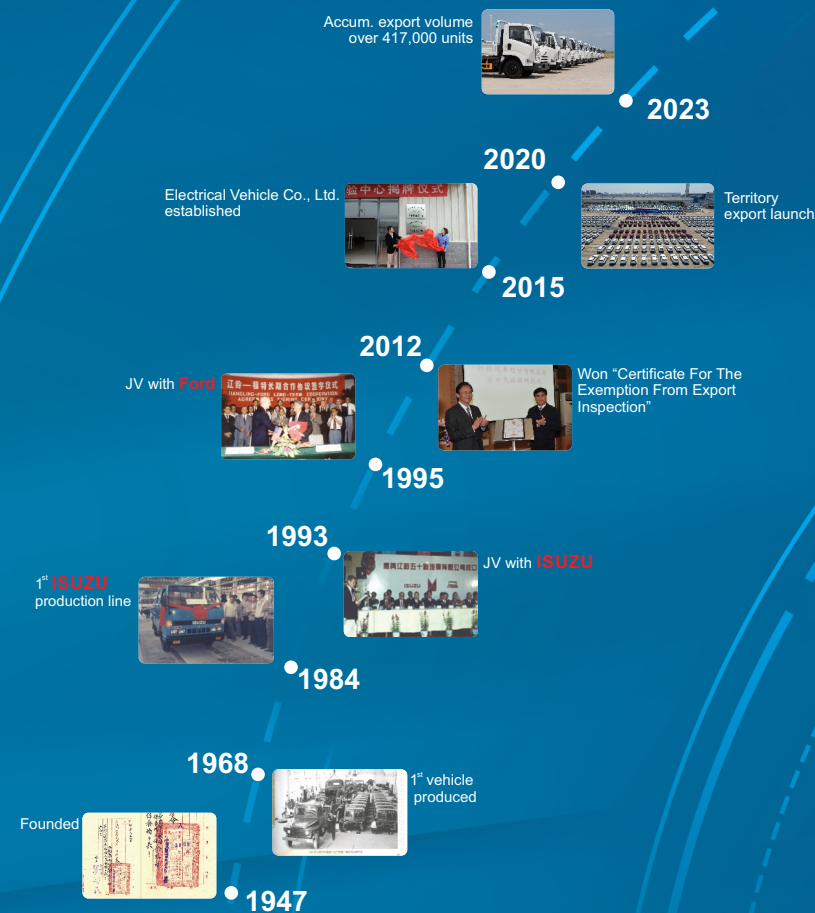


JMCG Facts

The only commercial vehicle company establishing joint-ventures with 2 of Fortune Global 500 enterprises in China (Ford, Isuzu)
Over 5 decades of experience in manufacturing vehicles



Jiangxi Jiangling Motors Import & Export Co., Ltd.
Add: 969, Jinrong Street, Honggutan District, Nanchang, Jiangxi, China
Tel: +86-791-86738769 Fax: +86-791-86738577
Website: www.jmcg-global.com



No.1 Light bus share
No.1 Ambulance share
Top 2 Pickup share
Top 5 Light truck share

ALL NEW Conquer



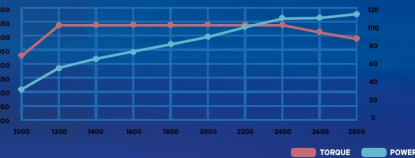
JMC
f JMCGMotors

POWERTRAIN



JX4D30 2.9L 4-cylinder

Max. power 120kW Max. torque 450N·m
Torque 350Nm at 1000 rpm
Garrett's 4th generation turbocharger
HT300 cylinder material with a life expectancy of 700,000 km



RIGOROUS TESTING

Leading-edge manufacturing processes to ensure the manufacturing quality of our products
JMC-Ford development process.
The agile and robust development process and strict verification standards have established the excellent quality standard of JMC light trucks

28 ITEMS Full range of road conditions, including twists, potholes, rocky roads, splash pads and more. Specialised test conditions.

-  **5000+** items Component level verification tests
-  **400+** items Complete vehicle level verification tests
-  **100+** items Complete vehicle road verification, 2 times the industry level.
-  **3000** System level test cases
-  **3Million** kilometres of proven mileage which could circle the earth 70 times
-  **13%** Mountain test mileage exceeds industry standards
-  **27%** bad road test mileage
-  **1million** kilometers complete vehicle durability verification test 10-15% rougher road condition than competitors
-  **9600+** times gear shafting verification test

INTERIOR

ERGONOMIC DESIGN

- New driver-centric interior hugging dashboard design
Flat cabin design with improved the inner space
- 17 storage areas for infinite space extension & USB and 12V power interface
- Reversible handbrake providing a flexible inner space
- Standard with power windows
- Ergonomic seats with 5-level adjustment armrest
- Multifunctional steering wheel



USB for vehicle recorder



Center USB



LOAD-BEARING

- **STRAIGHT THROUGH BEAM DESIGN:**

Frame section height—214mm

- **FRONT AXLE:**

Made of high-strength alloy steel

For higher strength and load-bearing capacity

- **QSTE650TM FRAME:**

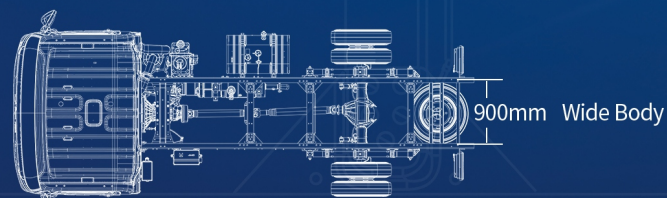
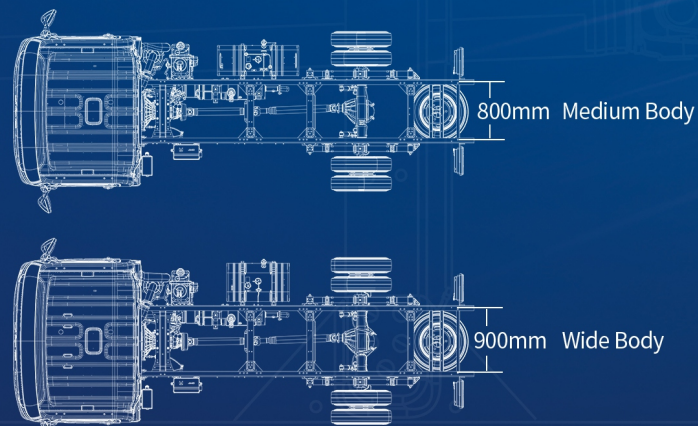
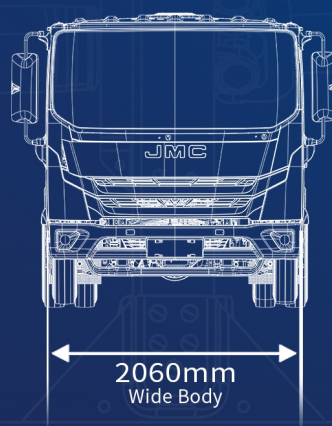
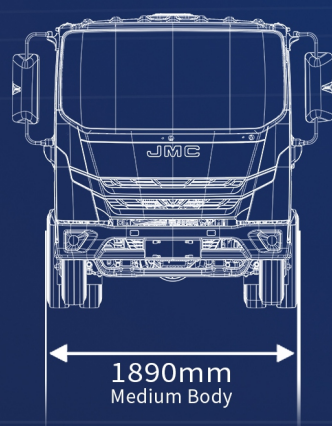
The strongest ultra-high strength steel in the industry

- **MODIFICATION FLEXIBILITY:**




Standard hole design


More convenient to install special vehicle modification accessories

UPGRADE CABIN WIDTH



ENERGY CONSERVATION

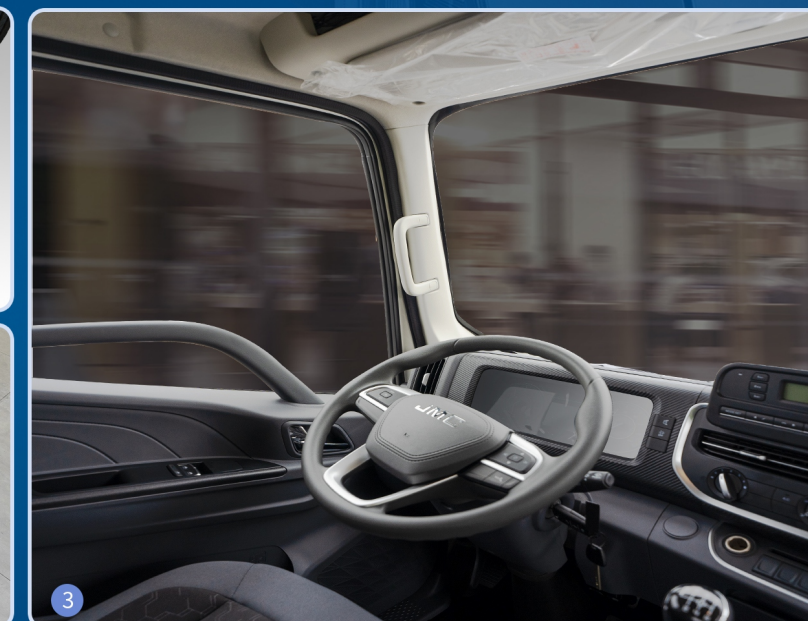-  0.45 air resistance coefficient
-  0.0065 rolling resistance tires
-  1800 bar high pressure fuel system



- 1 Standard air break
- 2 Wide wheelbase, wide leaf spring distance, Widest 900 mm frame in its class (wide body model)
- 3 4.38° A-pillar obstacle angle for less blind spot, more open view, safer driving

| Model | All New Conquer | | | | | | | | |
|--|---|----------------|-----------------------------|---|--------|---|-----------------------------|---|--------|
| Cabin type | SC/KC/DC | | | SC | | SC | SC/KC | SC | SC |
| Emissions | Euro 4 | Euro 5 | Euro 6 | Euro 2 | Euro 4 | Euro 2 | Euro 4 | Euro 5 | Euro 6 |
| Dimension | | | | | | | | | |
| Wheelbase(mm) | 3360 | | | | | 3815 | | | |
| Cabin width(mm) | 1890 | | | | | 2060 | | | |
| Overall Dimension Cargo body L*W*H(mm) | SC/KC: 5990*2080*2435/2455 DC: 5990*2080*2455/2475 | | | 5990*2180*2455/2475 | | SC: 6990*2380*2455/2475/2495 KC: 6990*2380*2475/2495 | | | |
| Cargo size L*H(mm) | SC: 4200*440 KC: 3800*440 DC: 3200*440 | | | | | | SC: 5200*550 KC: 4800*550 | | |
| Powertrain | | | | | | | | | |
| Engine | JX4D30 | | | | | | | | |
| Displacement(cc) | 2892 | | | | | | | | |
| Max.Output(kw)/Rpm | 120/2800 | | | | | | | | |
| Max.Torque(Nm)/Rpm | 450/1200-2400 | | | | | | | | |
| Gearbox Type | 6MT | | | | | | | | |
| Fuel Tank Capacity (L) | 105 | | | 125 | | | | | |
| Rear axle speed ratio | 4.222 | | | | | | | | |
| Brake&Tire | | | | | | | | | |
| Brake type | Air | | | | | | | | |
| Tire size | 7.0R16 10PR | | 7.5R16 16PR 215/75 R17.5 | Standard: 7.5R16 16PR Optional: 8.25R16 16PR | | | | Standard: 7.5R16 16PR 215/75 R17.5 Optional: 8.25R16 16PR | |
| Weight | | | | | | | | | |
| Kerb weight(kg) | 2880/2890/2995 | 2915/2925/3030 | 2920/2930/3035 | 2885 | 2895 | 3175 | 3185/3250 | 3220 | 3225 |
| GVW(kg) | 7495 | | | | | | | | |
| Safety | | | | | | | | | |
| ABS | • | • | • | • | • | • | • | • | • |
| Exhaust Brake | • | • | • | • | • | • | • | • | • |
| Power Steering | • | • | • | • | • | • | • | • | • |
| Sound alert for handbrake not released | • | • | • | • | • | • | • | • | • |
| Reminder of unfastened seat belt for driver | • | • | • | • | • | • | • | • | • |
| LED daytime running light | / | / | • | / | / | / | / | / | • |
| Comfort | | | | | | | | | |
| Infotainment System (Bluetooth music / Bluetooth phone / USB music) | • | • | • | • | • | • | • | • | • |
| Multifunction steering wheel | • | • | • | • | • | • | • | • | • |
| Air conditioner | • | • | • | • | • | • | • | • | • |
| Central locking(manual) | • | • | • | • | • | • | • | • | • |
| Remote key | • | • | • | • | • | • | • | • | • |
| Power windows | • | • | • | • | • | • | • | • | • |
| One-touch window lift--driver | • | • | • | • | • | • | • | • | • |
| Remote key control glass one-touch lift | • | • | • | • | • | • | • | • | • |
| Driver armrest | • | • | • | • | • | • | • | • | • |
| Headlight delay off | • | • | • | • | • | • | • | • | • |
| Driver overhead storage box | • | • | • | • | • | • | • | • | • |
| USB charging port | • | • | • | • | • | • | • | • | • |
| Overhead storage box mounted USB port | • | • | • | • | • | • | • | • | • |
| 12V Socket/ Power Port DC 12V Outlet | • | • | • | • | • | • | • | • | • |
| Speed-sensitive automatic door locking | • | • | • | • | • | • | • | • | • |

●:Standard ◯:Optional /:Not Available

All information is subject to change.

JMC

World-class supplier



Light Truck: Electronic control unit, sensors, oil pump, fuel injector
Pick Up/SUV: Fuel injector, ESP assembly



SUV (Diesel model):
Intake camshaft



SUV/Pick Up:
Transfer box assembly, transfer box ECU



SUV: Rear oxygen sensor



Light Van:
ACU (Airbag control unit)



SUV: Tyre



Light Van (Gasoline model):
Clutch, fuel pump plunger
SUV (Diesel model):
Generator OAP belt pulley



SUV/Pick Up: Electronic gear shifter, automatic transmission, EPS assembly



Pick Up/ Light Van:
Transmission



Light Truck:
Exhaust pipe



SUV: Tyre



Light Van: Seats



Light Van: Clutch



Light Van (Gasoline model):
Battery



Light Truck/SUV/Pick Up:
Turbocharger



Light Truck:
Pistons and piston rings



Light Truck: Combined instrument, A/C control panels, HVAC, condenser
Lighe Van:
Combined instrument



SUV/Pick Up:
Exhaust pipe system



Ford Global Quality Improvement Process



Ford Global Product Development System



- Exported to 110 countries and regions
- UN authorized supplier