

CP8

Applications

- ① Conference room
- ② Church
- ③ Fill system


Feature

- ① 44mm HF compression driver
- ② Low frequency response extend to 50Hz
- ③ Excellent vocal performance




Technical specification

- ① **FREQUENCY RESPONSE:** 90 Hz~18 kHz(± 3 dB) 50 Hz~20 kHz(-10 dB)
- ② **NOMINAL COVERAGE^(-6dB):** 80° (H) 80°(V) Constant directivity
- ③ **SENSITIVITY(@1w/1m):** 93 dB SPL 90-20 kHz
- ④ **POWER RATING(AES):** 250W (continuous) 1000W (peak)
500W (recommended)
- ⑤ **NOMINAL IMPEDANCE:** 8 ohm
- ⑥ **MAXIMUM SPL:** 123 dB (peak)
- ⑦ **DRIVERS:** L F: 1X8" driver
HF: 1X1.75"(44mm voice coil) compression driver

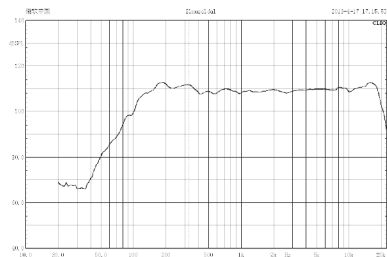


Frequency response

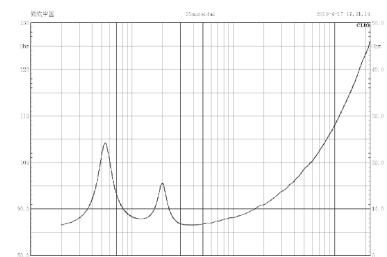


Impedance

Physical data


- ① **DIMENSIONS(HxWxD):** 231.7×222×185mm / 9.1"×8.7"×7.3"
- ② **WEIGHT:** 9.8 kg / 22 lbs
- ③ **CONNECTORS:** Binding Post
- ④ **SPEAKER CABLES:** 1+1-
- ⑤ **MATERIALS:** 15mm, 18mm multi-plywood
- ⑥ **FINISH:** Black polyurea paintings
- ⑦ **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam
- ⑧ **INSTALLATION:** standoff holes and for multiple flying points



Front



Top



Side