

LA110S

Applications

- ④ Touring performance
- ④ Theatre and multi-function hall
- ④ Church

Feature

- ④ 75mm voice coil high-transient response woofer
- ④ Small volume, vented, horn preposition design
- ④ Small enclosure but high SPL output




Technical specification


- ④ FREQUENCY RESPONSE: 40 Hz-200 Hz(±3 dB) 30 Hz-320 Hz(-10dB)
- ④ NOMINAL COVERAGE⁽¹⁾(±6dB): Omnidirectional
- ④ SENSITIVITY(@1w/1m): 100 dB SPL
- ④ POWER RATING(AES): 1000W
- ④ NOMINAL IMPEDANCE: 8 ohm
- ④ MAXIMUM SPL: 136 dB (peak)
- ④ DRIVERS: 2 x 15" (75mm voice coil) woofer

Physical data


- ④ DIMENSIONS(HxWxD): 680 x 580 x 796mm / 27"x23"x31"
- ④ WEIGHT: 60 kg / 132 lbs
- ④ CONNECTORS: 2 x NL4 connectors
- ④ SPEAKER CABLES: 1+1-
- ④ MATERIALS: 15mm, 18mm Baltic birch plywood
- ④ FINISH: Black polyurea paintings
- ④ GRILLE: Black epoxy mesh grille with acoustically reticulated cloth
- ④ RIGGING: 5,0,-5,-10 degree adjustable

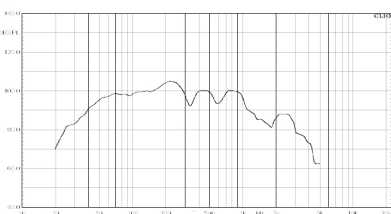


Frequency response

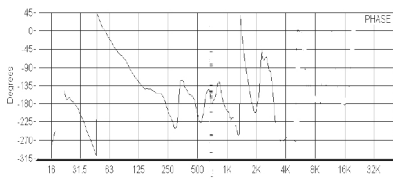


Phase response

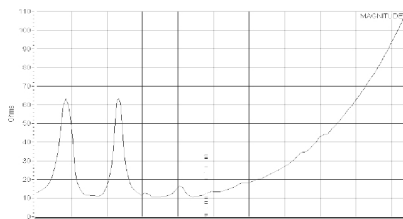


Impedance



Front



Top



Side