


LS21

Applications


- ➊ Middle and large touring performance
- ➋ Stadium

Feature

- ➊ Neodymium high-sensitivity driver, maximum headroom
- ➋ High-power output cabinet
- ➌ Ultra-low frequency limiting
- ➍ Multiple ergonomic handles on each side

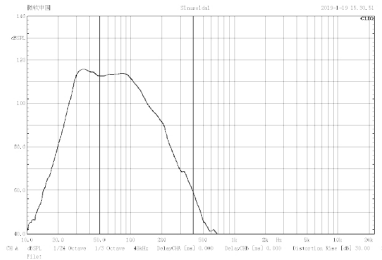

Frequency response

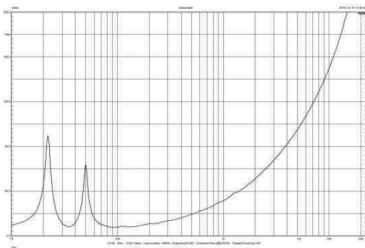


LF Impedance

Technical specification


- ➊ FREQUENCY RESPONSE: 25 Hz ~ 250 Hz (± 3 dB)
- ➋ NOMINAL COVERAGE ^(-6dB): Omnidirectional
- ➌ SENSITIVITY (@1w/1m): 98 dB SPL
- ➍ POWER RATING (AES): 1200W(AES)
- ➎ NOMINAL IMPEDANCE: 8 ohm
- ➏ MAXIMUM SPL: 140 dB SPL peak
- ➐ DRIVERS: 1x21" neodymium woofer(135mm voice coil)

Physical data


- ➊ DIMENSIONS (HxWxD): 648 × 1100 × 700mm
- ➋ WEIGHT: 100.6 kg/221 lbs
- ➌ CONNECTORS: 2 x NL4 connectors
- ➍ SPEAKER CABLES: 1+1-... , 2+2-...N/C
- ➎ MATERIALS: 15mm 18mm 24mm Baltic birch plywood
- ➏ FINISH: Black Polyurea paintings
- ➐ GRILLE: Black epoxy mesh grille with acoustically reticulated cloth

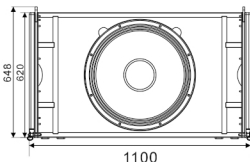

Front



Top



Side