

M15

Applications

- ④ Touring performance
- ④ Theatre, Music hall
- ④ Stage monitor

Feature

- ④ Asymmetrical rotatable horn
- ④ Large-size neodymium HF driver(75mm voice coil)
- ④ Customized high-transient response woofer(75mm voice coil)




Technical specification


- ④ FREQUENCY RESPONSE: 60 Hz-16 kHz(± 3 dB) 50 Hz-18 kHz(-10 dB)
- ④ NOMINAL COVERAGE^(-6dB): 60°(H) 40°(V) Constant directivity
- ④ SENSITIVITY(@1w/1m): 100 dB SPL
- ④ POWER RATING(AES): 450W
- ④ NOMINAL IMPEDANCE: 8 ohm
- ④ MAXIMUM SPL: 133 dB (peak)
- ④ DRIVERS: LF 1 x 15" (75mm voice coil) woofer
HF 1 x 3" neodymium compression driver

Physical data


- ④ DIMENSIONS(HxWxD): 675 x 446 x 379mm / 27"x18"x15"
- ④ WEIGHT: 27.5 kg / 61 lbs
- ④ CONNECTORS: 2 x NL4MP Neutrik Speakon connectors
- ④ SPEAKER CABLES: 1+1-
- ④ MATERIALS: 18mm, 24mm birch plywood
- ④ FINISH: Black Polyurea paintings
- ④ GRILLE: Black epoxy mesh grille with acoustically reticulated foam

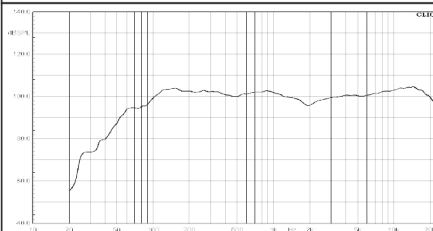


Frequency response

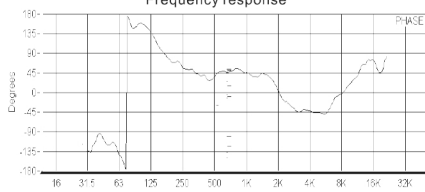


Phase response

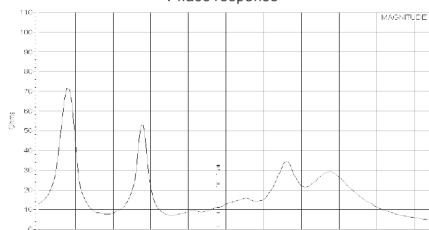


Impedance



Front



Top



Side