



## M5P

### Applications


- ④ Touring performance
- ④ Theatre, Music hall
- ④ Stage monitor

### Feature

- ④ Asymmetrical rotatable horn
- ④ Large-size neodymium HF driver(75mm voice coil)
- ④ Customized high-transient response woofer(75mm voice coil)

### Technical specification


- ④ **FREQUENCY RESPONSE:** 50 Hz-16 KHz(±3 dB) 40 Hz-18 KHz(-10 dB)
- ④ **NOMINAL COVERAGE** <sup>(-10dB)</sup>: 80° ( H ) 80° ( V ) Constant directivity
- ④ **MAXIMUM SPL:** 132 dB(peak)
- ④ **DRIVERS:** LF 1 x 15" (75mm voice coil) woofer  
HF 1 x 3" 75mm voice coil compression driver
- ④ **POWER REQUIREMENT:** 200-240V~ 50-60 Hz
- ④ **AMPLIFIER MODULE:** 2000W
- ④ **THD+N**(Rated power,4 Ohm/KHz) %: ≤0.8%
- ④ **SNR:** ≥95dB
- ④ **ACTIVE POWER GAIN:** 32dB
- ④ **INPUT CONNECTORS (PER.CH):** male XLR & female XLR (Neutrik)
- ④ **INPUT IMPEDANCE:** 20 kΩ balanced/10 kΩ unbalanced
- ④ **OUTPUT ELECTRIC CIRCUIT:** Class D circuit
- ④ **COOLING SYSTEM:** Airflow from back to front, Forced cooling

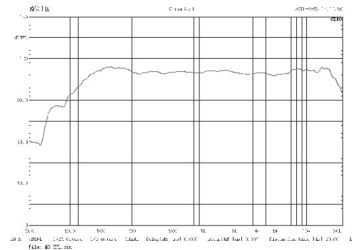


Frequency response

### Physical data


- ④ **DIMENSIONS(HxWxD):** 382 x 580 x 521.8 mm
- ④ **WEIGHT:** 16 kg / 35 lbs
- ④ **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- ④ **SPEAKER CABLES:** 1+1-
- ④ **MATERIALS:** 18mm, 24mm birch multi-plywood
- ④ **FINISH:** Black polyurea paintings
- ④ **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam



Front



Side



Top

