


P12

Applications


- Bar
- Theatre
- Stage Monitor

Feature


- Frequency response special design to avoid auditory fatigue
- Rotatable and asymmetrical horn
- 13x M8 rigging points
- Pole mount socket

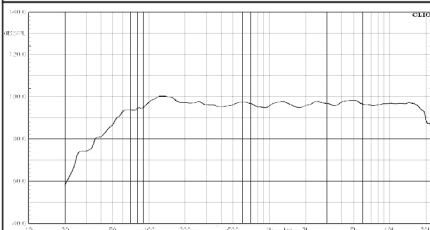

Frequency response

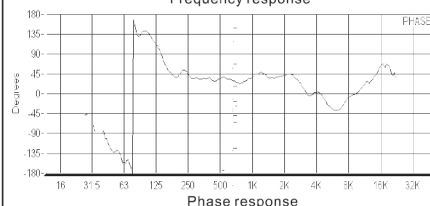

Phase response

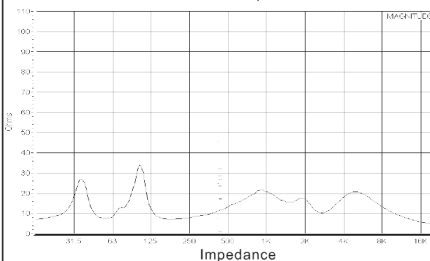


Impedance

Technical specification


- **FREQUENCY RESPONSE:** 60 Hz-18 kHz(±3 dB) 50 Hz-20 kHz(-10 dB)
- **NOMINAL COVERAGE** ^(-6dB): 50°~100°(H) 55°(V) Constant directivity
- **SENSITIVITY(@1w/1m):** 96 dB SPL
- **POWER RATING(AES):** 400W
- **NOMINAL IMPEDANCE:** 8 ohm
- **MAXIMUM SPL:** 128 dB(peak)
- **DRIVERS:** LF 1 x 12" (75mm voice coil) woofer
HF 1 x 44mm voice coil compression driver

Physical data


- **DIMENSIONS(HxWxD):** 576 x 372 x 384 mm / 23"x15"x15"
- **WEIGHT:** 23 kg / 51 lbs
- **CONNECTORS:** 2 x NL4MP Neutrik Speakon connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 18mm, 24mm birch plywood
- **FINISH:** Black polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated foam



Front



Top



Side