


## PO45K

### Applications


- ④ Conference system
- ④ Medium size performance

### Features


- ④ Flexible and easy to use with subwoofer PO-SUBK, it can be used independently or use both upper and lower
- ④ Top to top mode, rotate 180 degrees through the top column, achieve horn Turn level 100 degrees, long column of vertical 60 degrees and achieve long distance Amplification;

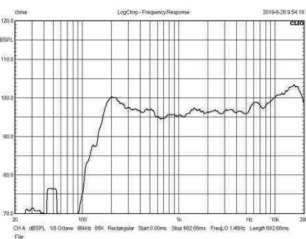

Frequency response

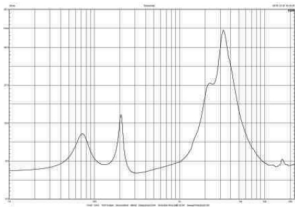

Impedance

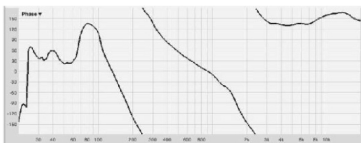


Phase response

### Technical specification

- ④ FREQUENCY RESPONSE 200 Hz ~ 18 kHz ( $\pm 3$  dB)  
150 Hz ~ 20kHz ( $-10$ dB)
- ④ NOMINAL COVERAGE<sup>(1=0dB)</sup> 100° (H) × 45° (V) (Up 15° , down 30° )
- ④ MAXIMUM SPL 130 dB SPL peak
- ④ DRIVERS LF 4x5" woofer (45mm voice coil)  
HF 1x1.75" neodymium compression driver
- ④ SENSITIVITY(@1w/1m) 97 dB SPL
- ④ POWER RATING(AES) 520W(AES)
- ④ NOMINAL IMPEDANCE 8 ohm

### Physical data

- ④ DIMENSIONS(HxWxD) 694 × 156 × 160mm
- ④ WEIGHT 11 kg/24.2lbs
- ④ CONNECTORS NEUTRIK NL4 x 2
- ④ SPEAKER CABLES 1+1-
- ④ MATERIALS 9mm, 12mm Baltic birch plywood
- ④ FINISH Black Polyurea paintings
- ④ GRILLE Black epoxy mesh grille with acoustically reticulated cloth
- ④ RIGGING 0, -5° degree adjustable  
( with adjustable support )



Front



Side



Top