

S118H

Applications

- ④ Touring performance
- ④ Stadium
- ④ Theatre



Feature

- ④ 100mm voice coil, high transient response woofer
- ④ Thick and elastic hearing
- ④ Vented, horn preposition design




Technical specification

- ④ FREQUENCY RESPONSE: 30 Hz-180 Hz(± 3 dB) 25 Hz-250 Hz(-10 dB)
- ④ NOMINAL COVERAGE^(-6dB): Omnidirectional
- ④ SENSITIVITY(@1w/1m): 100 dB SPL
- ④ POWER RATING(AES): 1200W
- ④ NOMINAL IMPEDANCE: 8 ohm
- ④ MAXIMUM SPL: 130 dB (continuous) 136 dB (peak)
- ④ DRIVERS: 1 x 18" (100mm voice coil) subwoofer

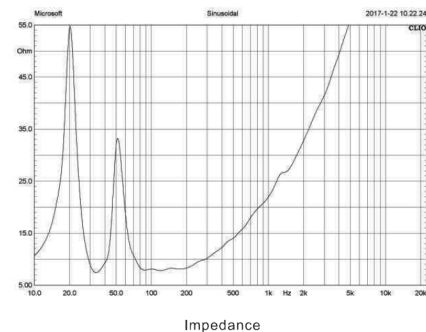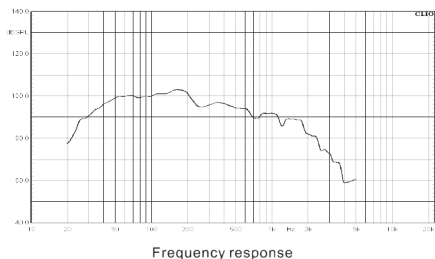


Physical data


- ④ DIMENSIONS(HxWxD): 750 x 561 x 880mm / 30"x22"x35"
- ④ WEIGHT: 48 kg / 106 lbs
- ④ CONNECTORS: 2 x NL4 connectors
- ④ SPEAKER CABLES: 1+1-
- ④ MATERIALS: 18mm, 24mm and 30mm Baltic birch plywood
- ④ FINISH: Black Polyurea paintings
- ④ GRILLE: Black epoxy mesh grille with acoustically reticulated cloth
- ④ ASSEMBLY: 4 handle cups, 4 rigging, M20 jacking



Front



Top



Side