



S221

Applications


- Touring performance
- Stadium
- Theatre

Feature

- 1800W (AES) LF driver
- Thick and elastic lows
- Provide 27 Hz-200 Hz frequency response
- Mounted wear-resisting Nylon bar

Technical specification


- **FREQUENCY RESPONSE:** 27 Hz ~ 150 Hz (± 3 dB) 22 Hz ~ 200 Hz (-10 dB)
- **NOMINAL COVERAGE^(1-6dB):** Omnidirectional
- **SENSITIVITY(@1w/1m):** 99 dB SPL
- **POWER RATING(AES):** 3600W
- **NOMINAL IMPEDANCE:** 4 ohm
- **MAXIMUM SPL:** 134 dB SPL 140dB SPL peak
- **DRIVERS:** LF 2x21" (135mm voice coil) neodymium driver

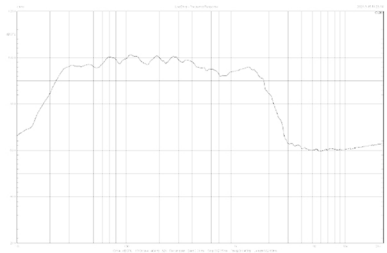


Frequency response

Physical data


- **DIMENSIONS(HxWxD):** 650 x 1450 x 850 mm / 26"x57"x33"
- **WEIGHT:** 132.5 kg / 292 lbs
- **CONNECTORS:** 2xNL4 connectors
- **SPEAKER CABLES:** 1+1-
- **MATERIALS:** 24mm Baltic birch plywood
- **FINISH:** Black Polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated cloth

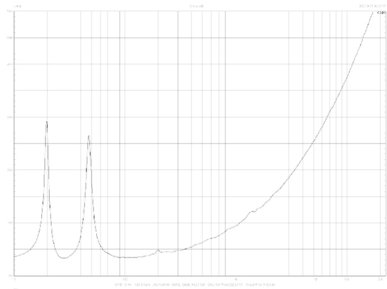


Impedance

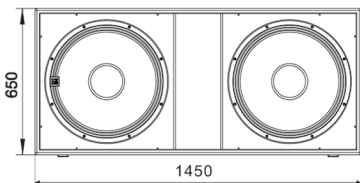

Front

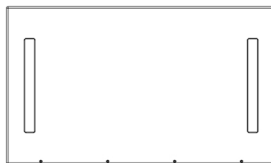

Top



Side