

SW218



Applications

- Middle and large touring performance
- Stadium

Feature


- Neodymium high-sensitivity driver, maximum headroom
- High-power output cabinet
- Ultra-low frequency limiting
- Multiple ergonomic handles on each side

Technical specification


- **FREQUENCY RESPONSE** 30 Hz - 200 Hz (± 3 dB) / 25 Hz - 250 Hz (-10dB)
- **NOMINAL COVERAGE** (-6dB) Omnidirectional
- **SENSITIVITY**(@1w/1m) 98 dB SPL
- **POWER RATING**(AES): 3000W(AES)
- **NOMINAL IMPEDANCE** 4 ohm
- **MAXIMUM SPL:** 138 dB SPL peak
- **DRIVERS:** 2x18" neodymium woofer(135mm voice coil)

Physical data


- **DIMENSIONS**(HxWxD) 560.5 x 1340 x 700mm
- **WEIGHT:** 82 kg
- **CONNECTORS:** 2 x NL4 connectors
- **SPEAKER CABLES** 1+1-
- **MATERIALS:** 15mm 18mm 24mm Baltic birch plywood
- **FINISH:** Black Polyurea paintings
- **GRILLE:** Black epoxy mesh grille with acoustically reticulated cloth

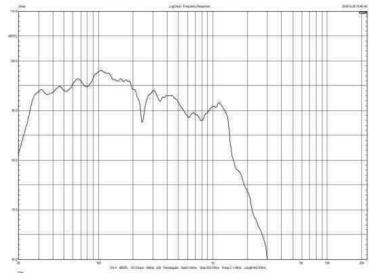


Frequency response

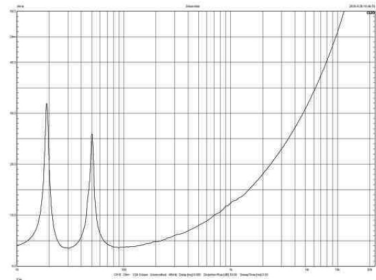


LF Impedance

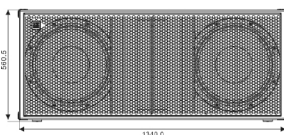

Front

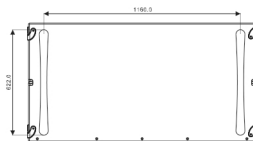

Top



Side