

## V215

### Applications

- ① Theatre
- ② Outdoor
- ③ Small show


### Feature

- ① 75mm Large-size HF driver
- ② High power and short loss crossover
- ③ Powerful low-frequency




### Technical specification

- ① FREQUENCY RESPONSE: 45 Hz ~ 16 kHz (±3 dB) 35 Hz ~ 18 kHz (-10 dB)
- ② NOMINAL COVERAGE: 90°(H) ×60°(V)
- ③ SENSITIVITY(@1W/1M): 98 dB
- ④ POWER RATING(AES): 900W
- ⑤ NOMINAL IMPEDANCE: 8 ohm
- ⑥ MAX IMUM SPL: 133 dB SPL (peak)
- ⑦ DRIVERS: HF:1X3"(75mm voice coil) compression driver  
LF:2x15"(75mm voice coil) subwoofer

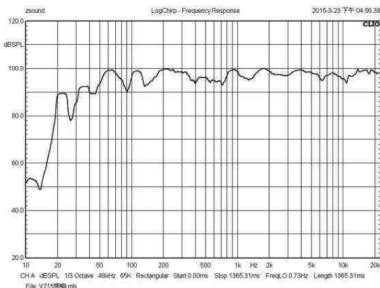


Frequency response

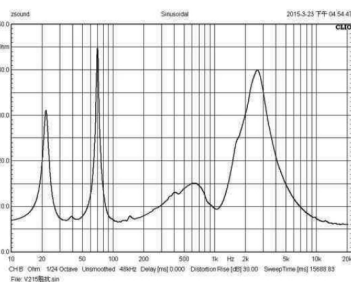

Impedance

### Physical data

- ① DIMENSIONS(H×W×D): 1200×506×470mm / 47"×20"×19"
- ② WEIGHT: 46 kg / 101 lbs
- ③ CONNECTORS: 2 Neutrik NL4MP connectors
- ④ SPEAKER CABLES: 1+1-
- ⑤ MATERIALS: 15mm, 18mm oaken plywood
- ⑥ FINISH: Black polyurea paintings
- ⑦ GRILLE: black epoxy mesh grille




Front




Side



Back



Top



bottom